






BNC COAX CABLE BUILD INSTRUCTIONS

PART #: BNC COAX CABLE BUILD INSTRUCTIONS REV: SHEET 1 OF 1

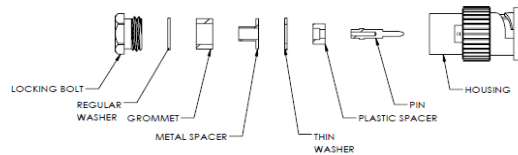

STEP 1: SLIDE ON LOCKING BOLT, REGULAR WASHER, AND GROMMET



STEP 2: STRIP RG58 COAX CABLE USING A 3 BLADE COAX STRIPPING TOOL




STEP 3: MOVE LOCKING BOLT, REGULAR WASHER, AND GROMMET TOWARD STRIPPED END OF CABLE, THEN PUSH METAL SPACER INTO THE GROMMET AND BRAID (BRAID SHOULD BE BETWEEN THE METAL SPACER AND GROMMET) FOLLOWED BY THE THIN WASHER AGAINST THE METAL SPACER, PUSH PLASTIC SPACER AROUND THE DIELECTRIC WITH THE LARGER DIAMETER STEP TOWARD THE THIN WASHER AND PUSH THE PIN ONTO THE CONDUCTOR MAKING SURE IT IS INSERTED INTO THE PLASTIC SPACER.



STEP 4: SOLDER PIN TO CONDUCTOR MAKING SURE NOT TO OVERHEAT AND MELT THE PLASTIC SPACER.



STEP 5: INSERT CABLE SUB ASSEMBLY INTO THE HOUSING. HOLD CABLE AND BODY IN PLACE AND TIGHTEN THE LOCKING NUT WITH A WRENCH.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES () DIMENSIONS ARE IN MILLIMETERS FOR REFERENCE TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .005 (±.127) THREE PLACE DECIMAL ± .015 (±.381) ALL DIAMETERS CONCENTRIC WITHIN .005 (±.127) REMOVE ALL BURRS AND SHARP EDGES MIN SURFACE FINISH: Ra: .63 µm (1) Ra: 1.6 µm (1) N7 THIRD ANGLE PROJECTION: 	QUOTATION #:	BNC	
	DRAWN:	NAME	DATE
	CHECKED:	AS	1/8/2019
	APPROVED:	AS	1/8/2019
	USED ON:	APPLICATION:	BASED ON:
MOUNT:	WEIGHT:	0.038	

APPROVED
MPF PRODUCTS INC.
TITLE:
BNC CONNECTOR-CABLE ASSEMBLY INSTRUCTIONS
DWG NO: BNC COAX CABLE BUILD INSTRUCTIONS
Tuesday, January 8, 2019 8:45:40 AM - BY: 31622

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MPF PRODUCTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.