

MPF PRODUCTS INC.



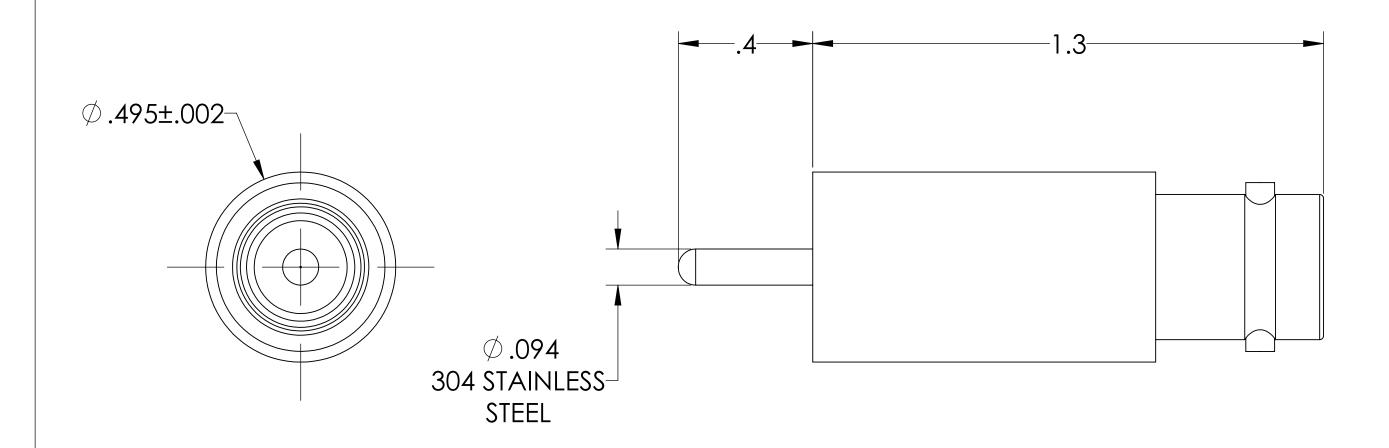

PART #	AIRSIDE CONNECTOR INCLUDED		
A0058-1-W	YES		
A0058-2-W	NO		

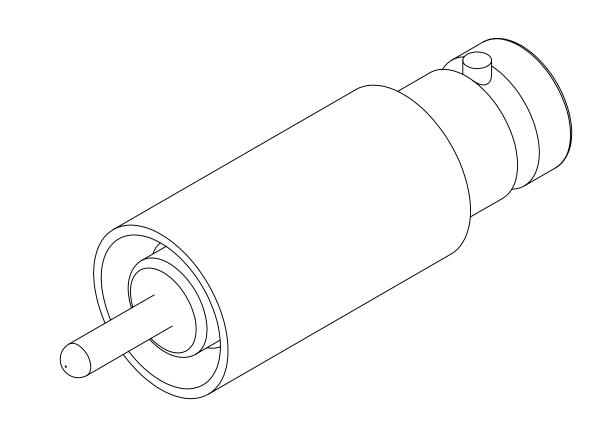

NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 5000 VOLTS DC

3. CURRENT: 3 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.495" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME				
	DRAWN	WJ	9/11/2015	MPF PROD	DUCIS II	NC.
ANGULA D. AAA OU. 170°	CHECKED		9/11/2015	TITLE:		
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015	MHV C	OAXIAL	
THREE PLACE DECIMAL ± .015	THIRD ANGLE:			FEEDTHRO	FEEDTHROUGH, 1 PIN,	
MATERIAL			GROUNDED SHIELD, 0.495" DIA SS WELD ADAPTER			
	APPLICATION NEXT ASSY USED ON					
				DOWNLOADED FRO	OM MPFPI.CC	M
FINISH	SURFACE FINIS	SH: 6	OR BETTER	DWG. NO.		REV
PLATING	UNLESS OTHERWISE SPECIFIED:		A0058			
ILAIINO	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Thursday, October 4, 2018 8:26:14 AM		М	