
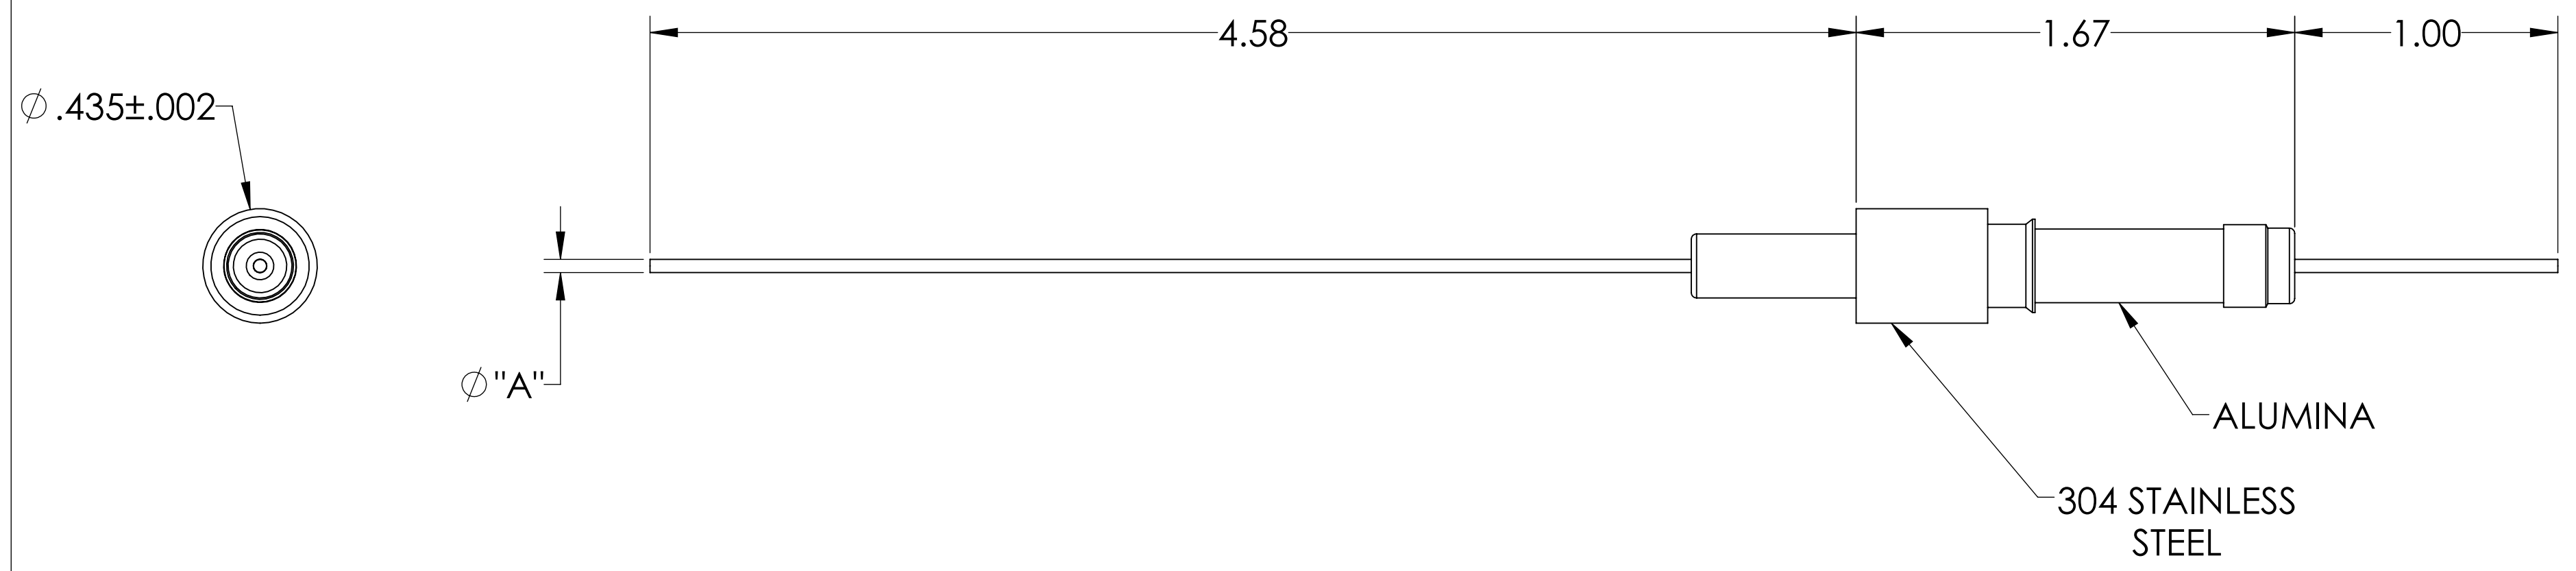


MPF PRODUCTS INC.

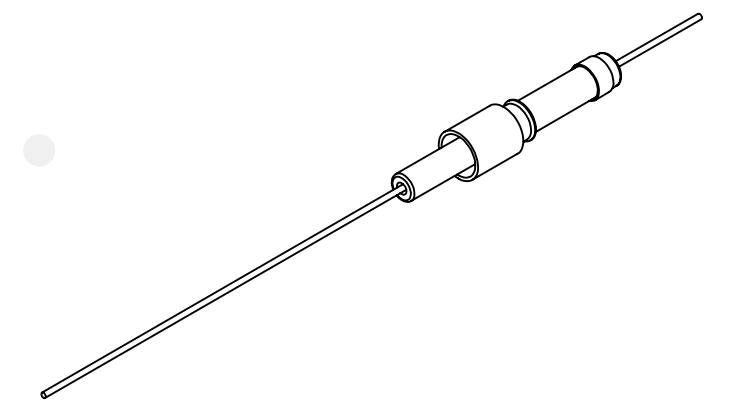

PART #	$\phi 'A'$	CONDUCTOR MATERIAL	CURRENT RATING
A0066-1-W	.094	304 STN STL	3 AMPS
A0066-2-W	.050	304 STN STL	1 AMP
A0066-3-W	.092	NICKEL 200	15 AMPS
A0066-4-W	.050	NICKEL 200	8 AMPS
A0066-5-W	.094	OFHC COPPER	50 AMPS
A0066-7-W	.050	OFHC COPPER	25 AMPS

- NOTE:
- VOLTAGE: 14,000 VOLTS DC
 - CURRENT: SEE TABLE
 - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 14 KV, 1 Pin, 0.435" Dia Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		POWER FEEDTHROUGH, 14 KV, 1 PIN, 0.435" WELD ADAPTER	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH:		SURFACE FINISH: 63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A0066	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				Friday, January 18, 2019 11:24:56 AM	