


MPF PRODUCTS INC.

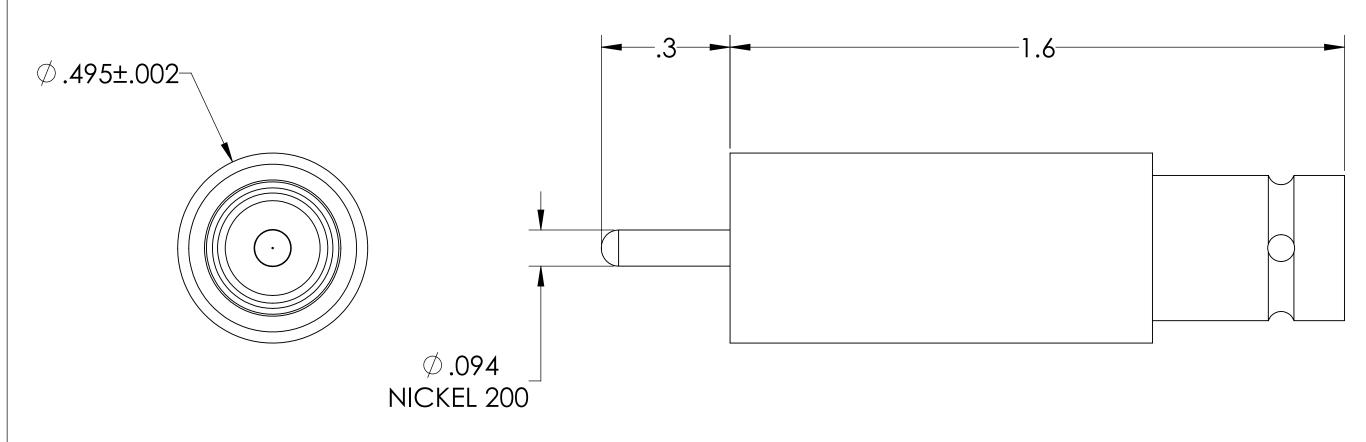

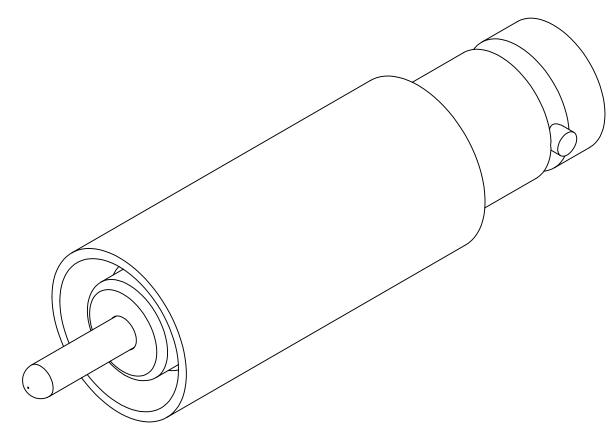

PART #	AIRSIDE CONNECTOR INCLUDED
A0152-1-W	YES
A0152-2-W	NO



NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 5000 VOLTS DC

3. CURRENT: 5 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.495" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #							
	N							
DIMENSIONS ARE IN INCHES		NAME	DATE		ADE DDOE	NI OTC II		
TOLERANCES:	DRAWN	WJ	9/11/2015		1PF PROD)0C12 II	٧C.	
	CHECKED		9/11/2015	TITL	.E:			
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015	SHV-5 COAXIAL				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.495" DIA SS WELD ADAPTER					
						,		
MATERIAL								
	APPLICATION NEXT ASSY USED ON				DIA 33 WEE		.11	
	INEXT ASST		03ED ON					
				DOV	wnloaded fro	M MPFPI.CO	M	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.		REV	
DI ATINIO	UNLESS OTHERWISE SPECIFIED:			A0152				
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Thursday, October 4, 2018 8:40:17 AM			M		
WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1								