


MPF PRODUCTS INC.

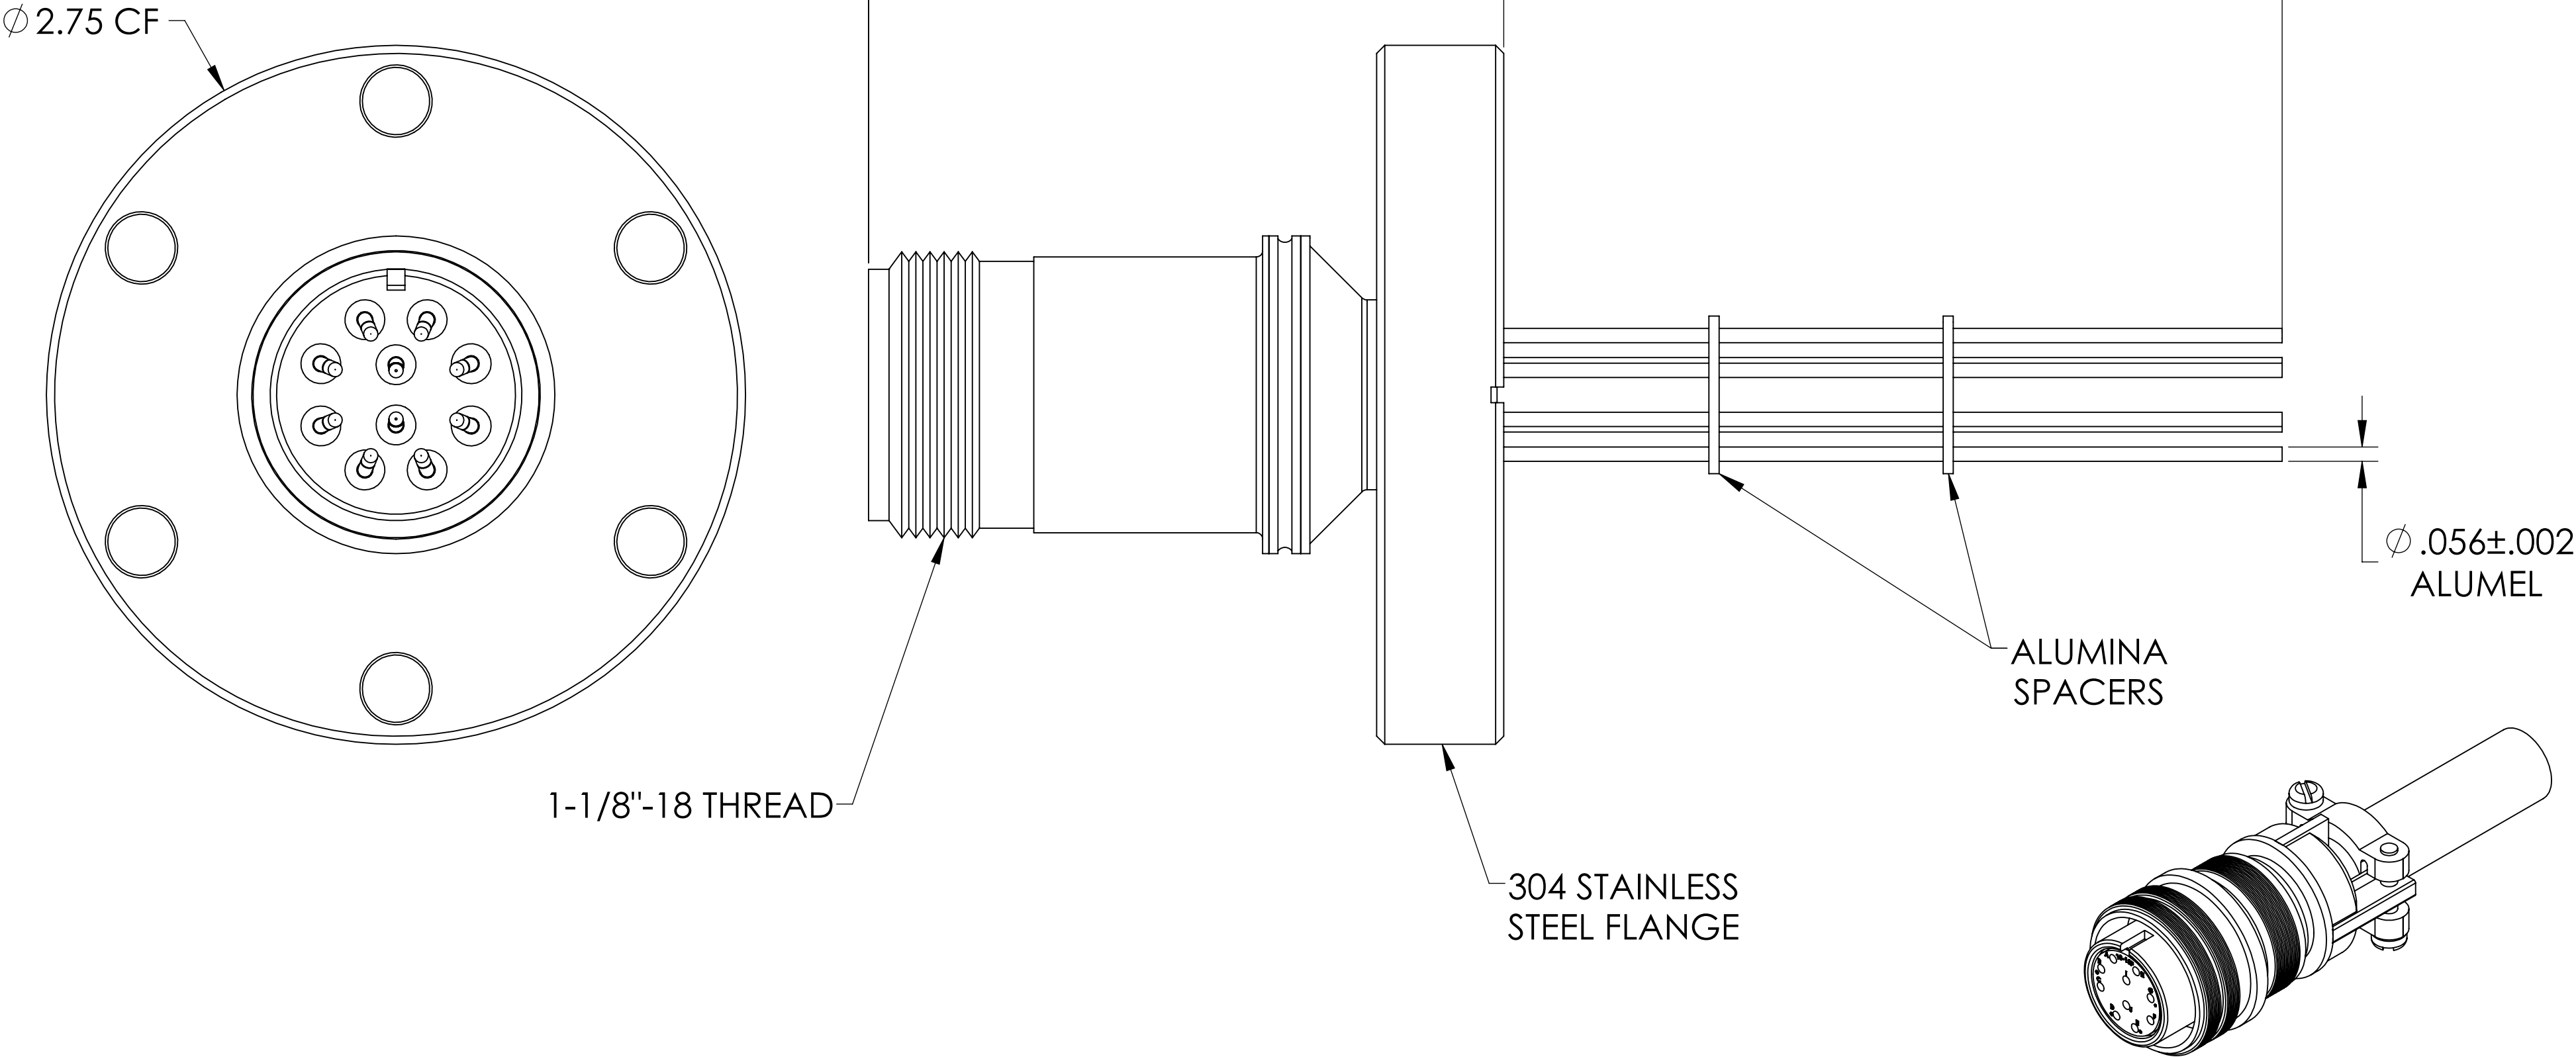

- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
 - 2. CURRENT: 10 AMPS PER PIN, 50 AMPS FULLY LOADED
 - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 10 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015 MATERIAL FINISH PLATING	QUOTATION #			MPF PRODUCTS INC. TITLE: MULTIPIN, 10 PINS, 700V, 10A, 275CF DOWNLOADED FROM MPFPI.COM DWG. NO. A0193-12-CF REV
	NAME	DATE	N/A	
	DRAWN WJ	9/11/2015		
	CHECKED	9/11/2015		
	ENG APPR. WJ	9/11/2015		
	THIRD ANGLE:			
	APPLICATION			
	NEXT ASSY	USED ON		
	SURFACE FINISH:			
	UNLESS OTHERWISE SPECIFIED:			
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			