


MPF PRODUCTS INC.

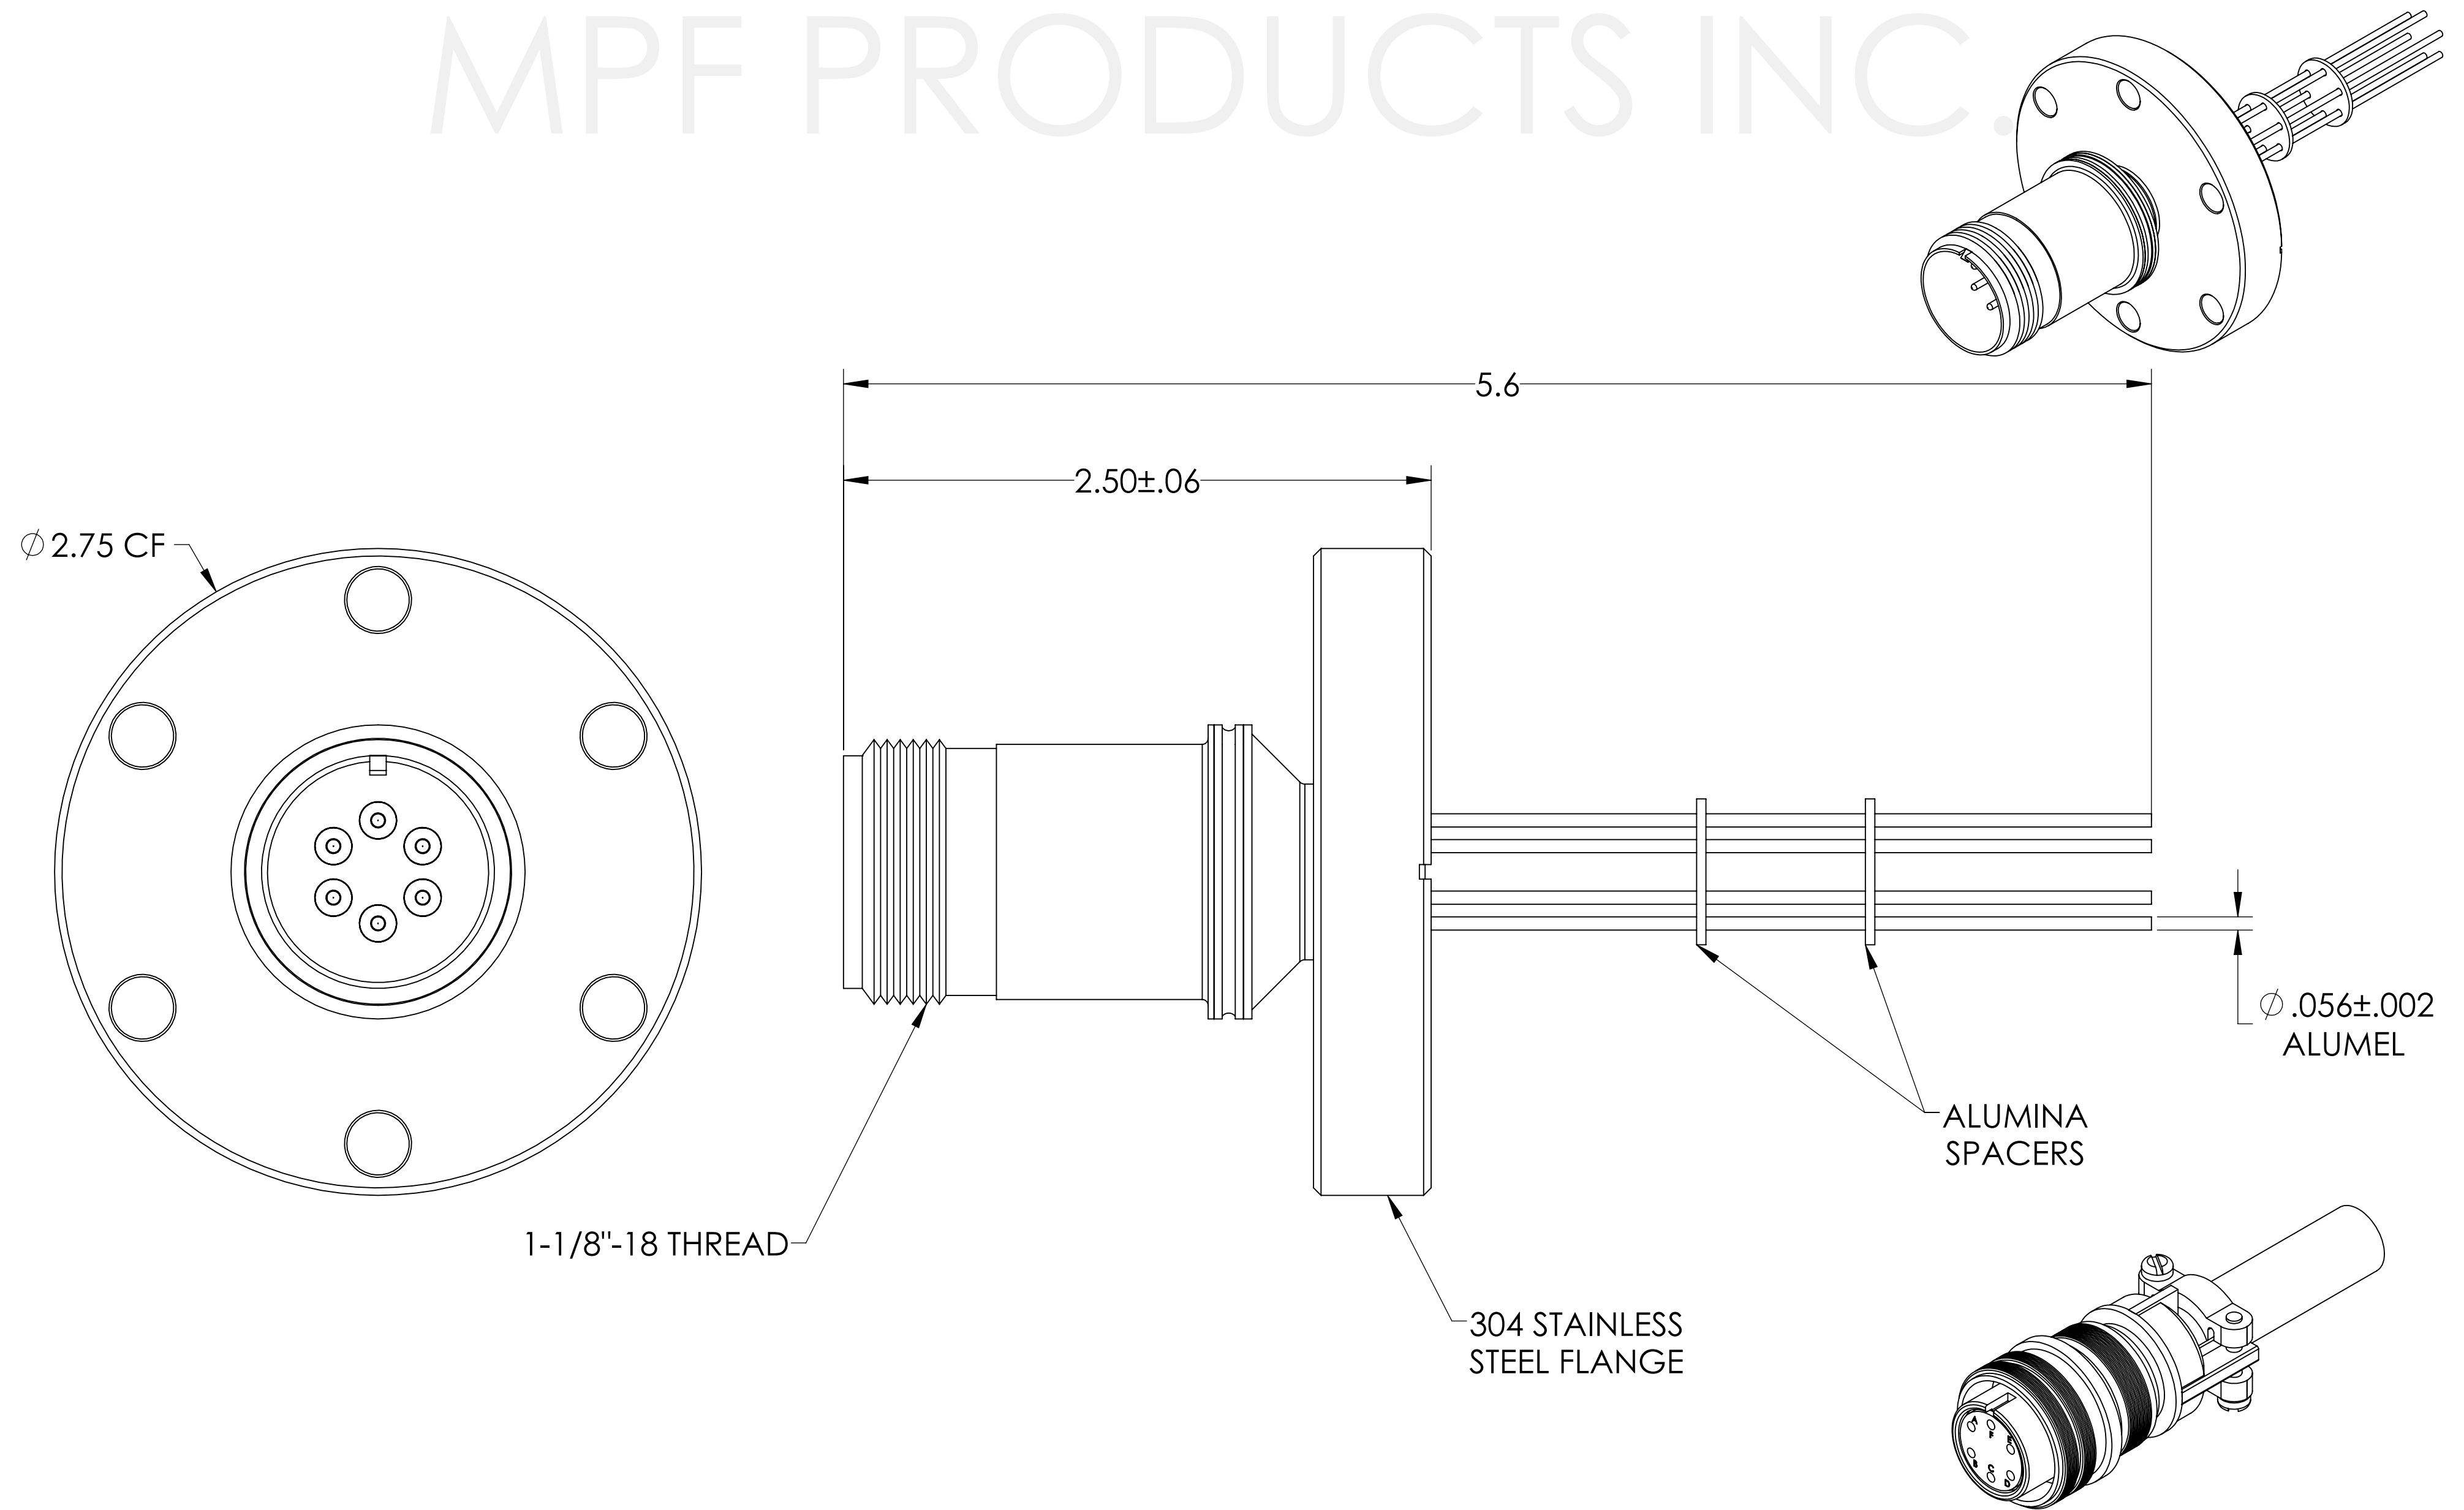

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: 10 AMPS PER PIN, 36 AMPS FULLY LOADED
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 6 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015		DRAWN	WJ	DATE	9/11/2015
		CHECKED			9/11/2015
		ENG APPR.	WJ		9/11/2015
		THIRD ANGLE:			
MATERIAL				APPLICATION NEXT ASSY	
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
				TITLE: MULTIPIN, 6 PINS, 700V, 10A, 275CF	
				DOWNLOADED FROM MPFPI.COM	
				DWG. NO.	REV
				A0193-8-CF	
				Thursday, February 7, 2019 8:27:52 AM	