
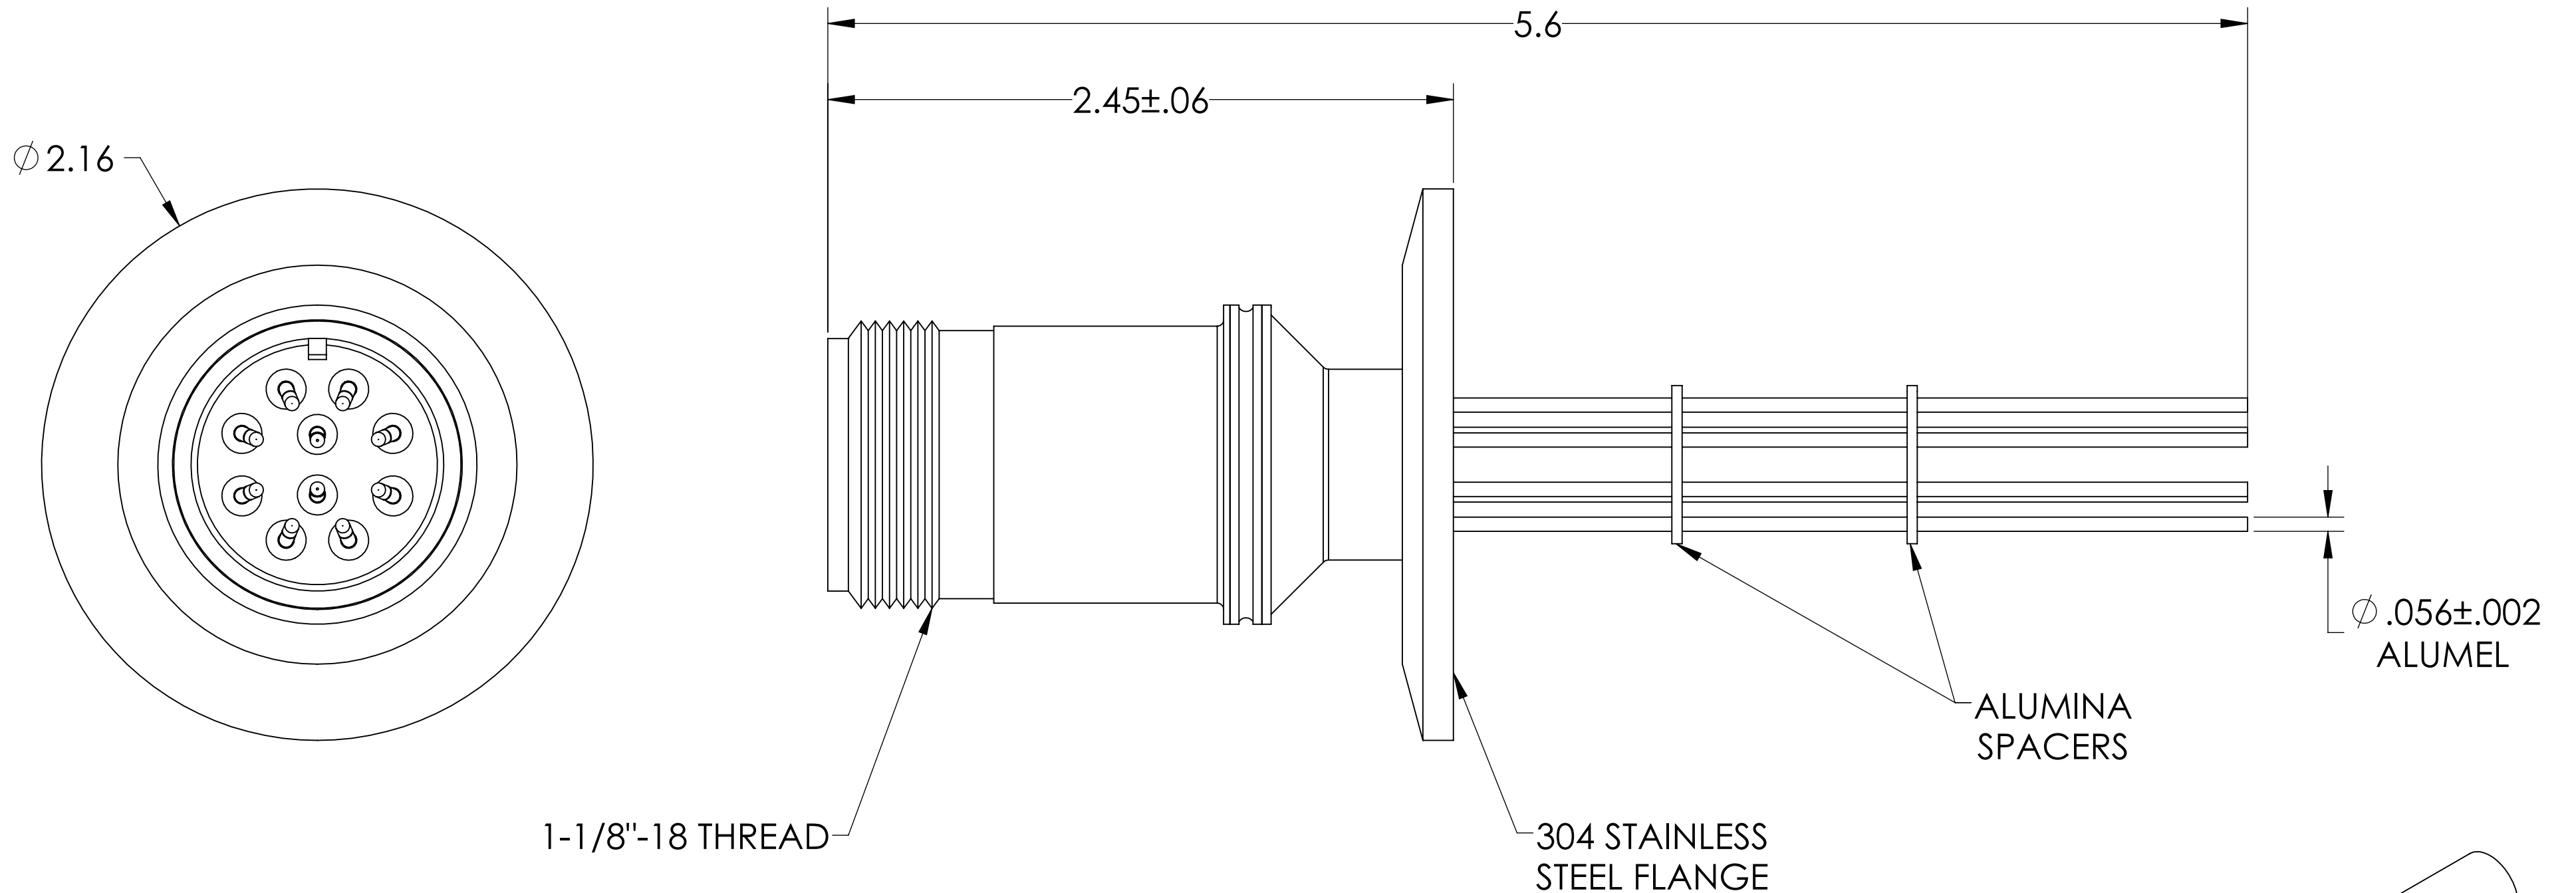



MPF PRODUCTS INC.

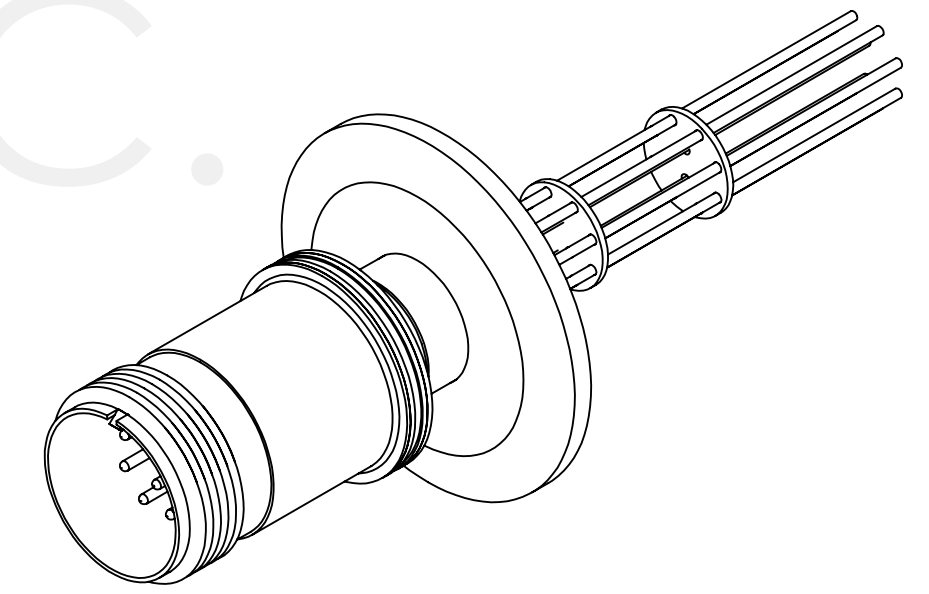

SPECIFICATIONS:

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: 10 AMPS PER PIN, 50 AMPS FULL LOAD
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 10 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 2.16" QF/KF

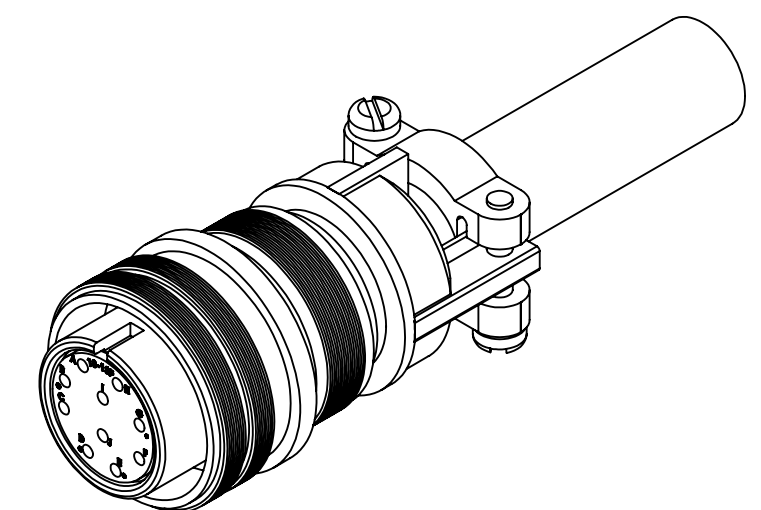

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ 9/11/2015		
MATERIAL		THIRD ANGLE:		MULTIPIN, 10 PINS, 700V, 10A, 2.16 QF/KF	
FINISH					
PLATING		APPLICATION		DOWNLOADED FROM MPFPI.COM	
		NEXT ASSY		DWG. NO.	
		USED ON		REV	
		SURFACE FINISH: 63 OR BETTER		A0194-12-QF	
		UNLESS OTHERWISE SPECIFIED:		Thursday, February 7, 2019 8:25:53 AM	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			