
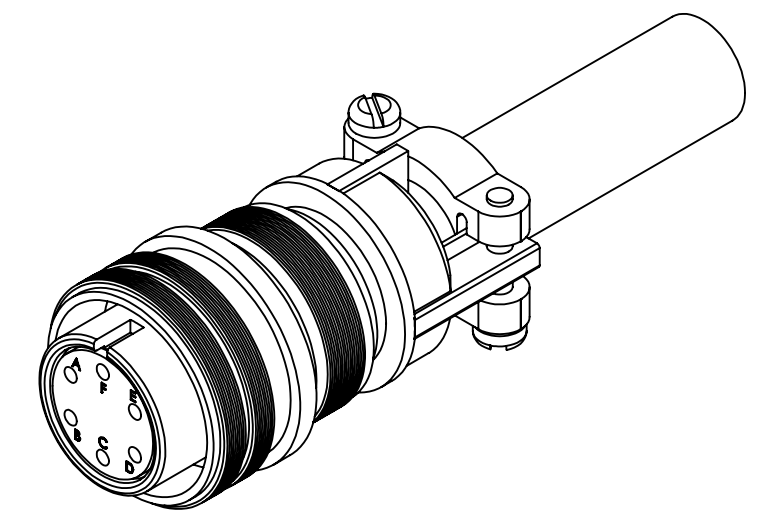
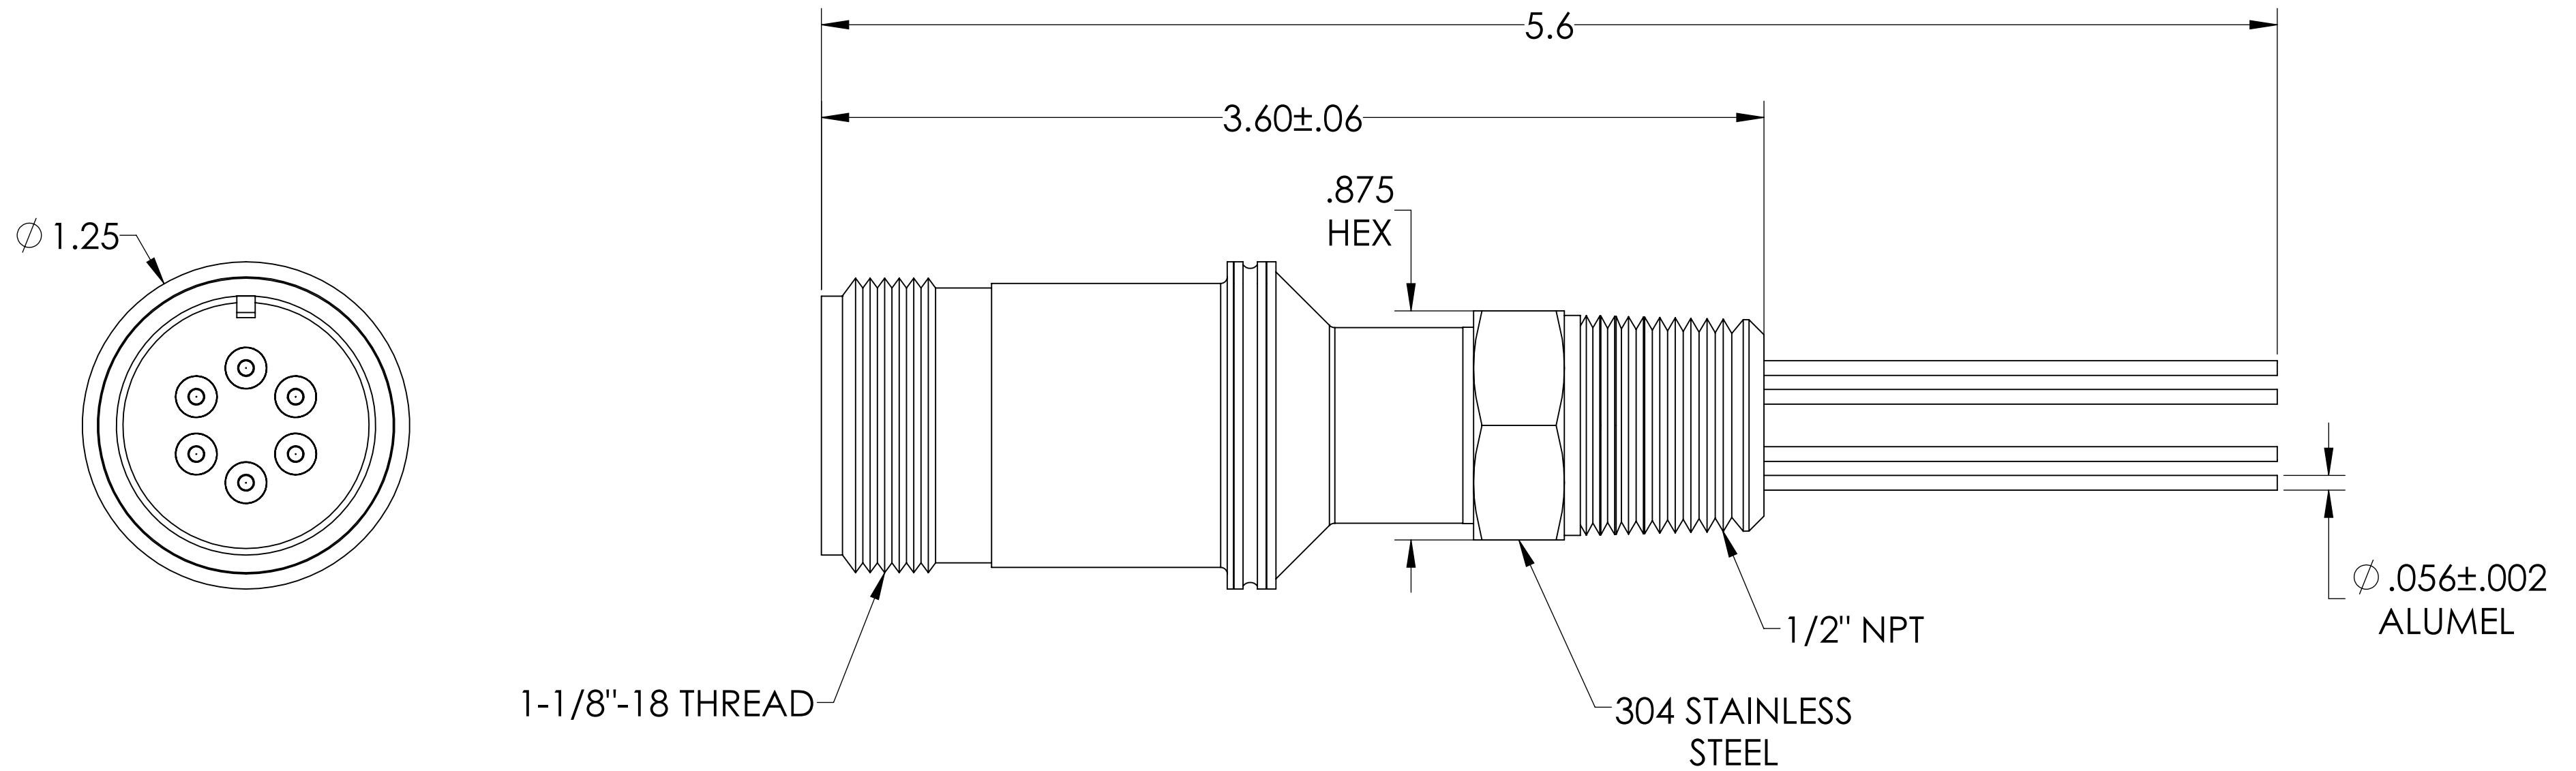


MPF PRODUCTS INC.

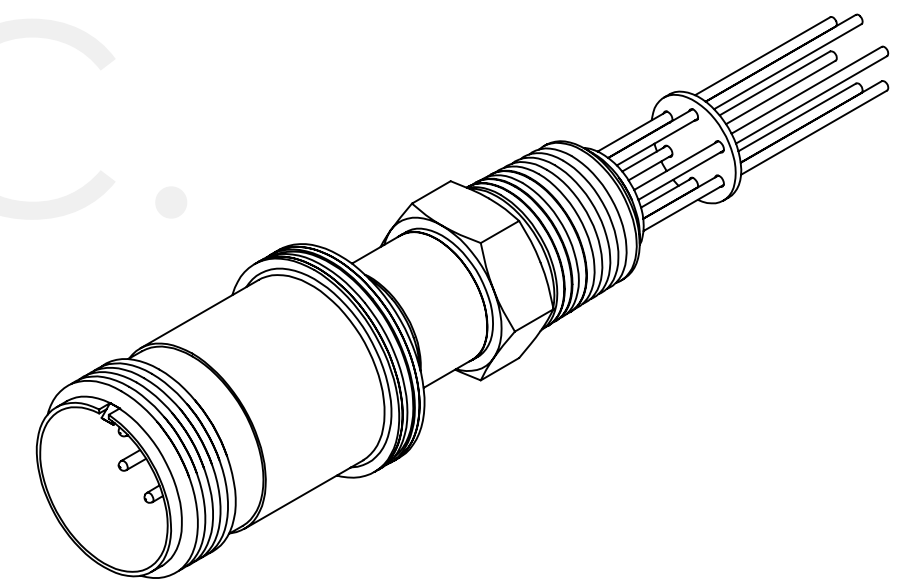

SPECIFICATIONS:

1. VOLTAGE: 700 VOLTS DC
2. CURRENT: 10 AMPS PER PIN, 36 AMPS FULL LOAD
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE <math> < 1 \times 10^{-9}</math> ATM CC/SEC HE

MS Series, Multipin Feedthrough, 6 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 0.5" NPT

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH $\pm 1/2^\circ$	DRAWN	9/11/2015	
TWO PLACE DECIMAL $\pm .030$	CHECKED	9/11/2015	
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:	TITLE:	
		MULTIPIN, 6 PINS, 700V, 10A, 1/2" NPT	
FINISH	APPLICATION	DOWNLOADED FROM MPFPI.COM	
PLATING	NEXT ASSY	USED ON	DWG. NO.
	SURFACE FINISH:	$\sqrt{63}$ OR BETTER	A0198-8-NPT
	UNLESS OTHERWISE SPECIFIED:	REV	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	Thursday, January 24, 2019 1:35:28 PM	