


MPF PRODUCTS INC.

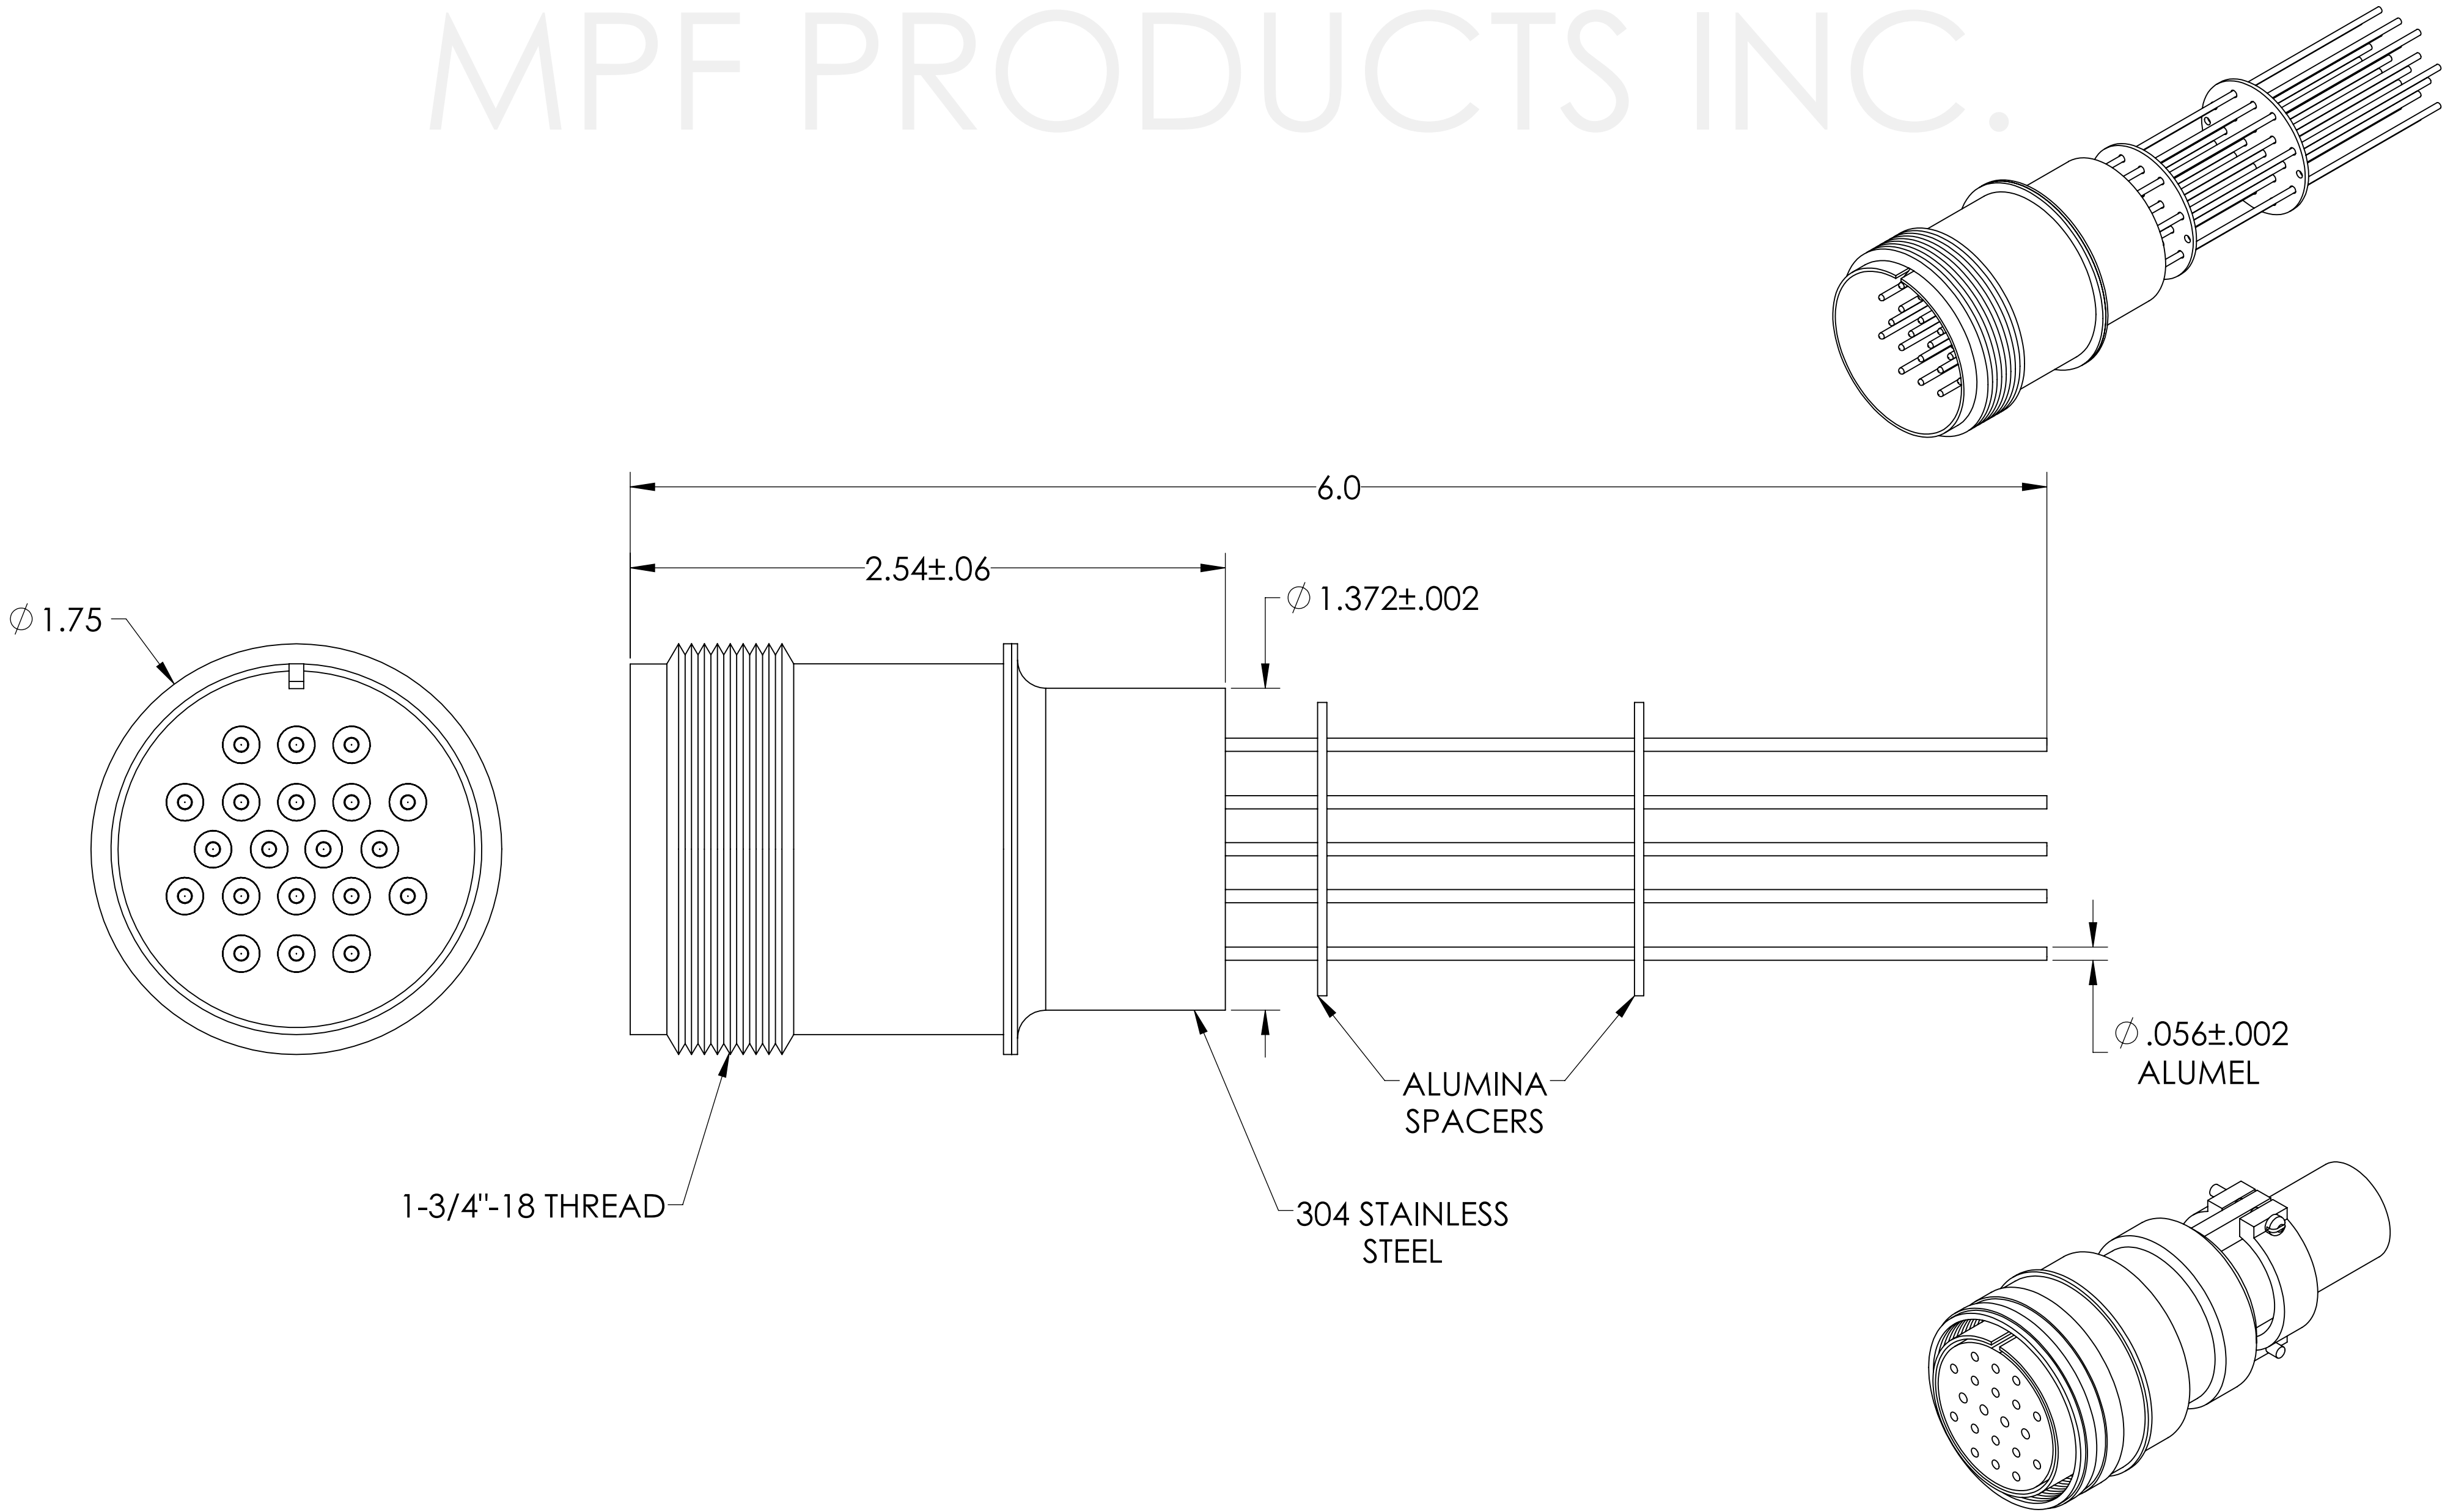

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: 10 AMPS PER PIN, 75 AMPS FULL LOAD
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 20 Pins, 700 Volts, 10 Amps per Pin, 0.056" Dia Conductors w/ Air-side Connector, 1.372" Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015  MATERIAL		DRAWN	WJ	DATE	9/11/2015
		CHECKED			9/11/2015
		ENG APPR.	WJ		9/11/2015
		THIRD ANGLE:			
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
		TITLE:		MULTIPIN, 20 PINS, 700V, 10A, 1.372" WELD ADAPTER	
		DWG. NO.		A0204-4-W	
		REV			
		DOWNLOADED FROM MPFPI.COM			
		Thursday, January 24, 2019 3:11:05 PM			