
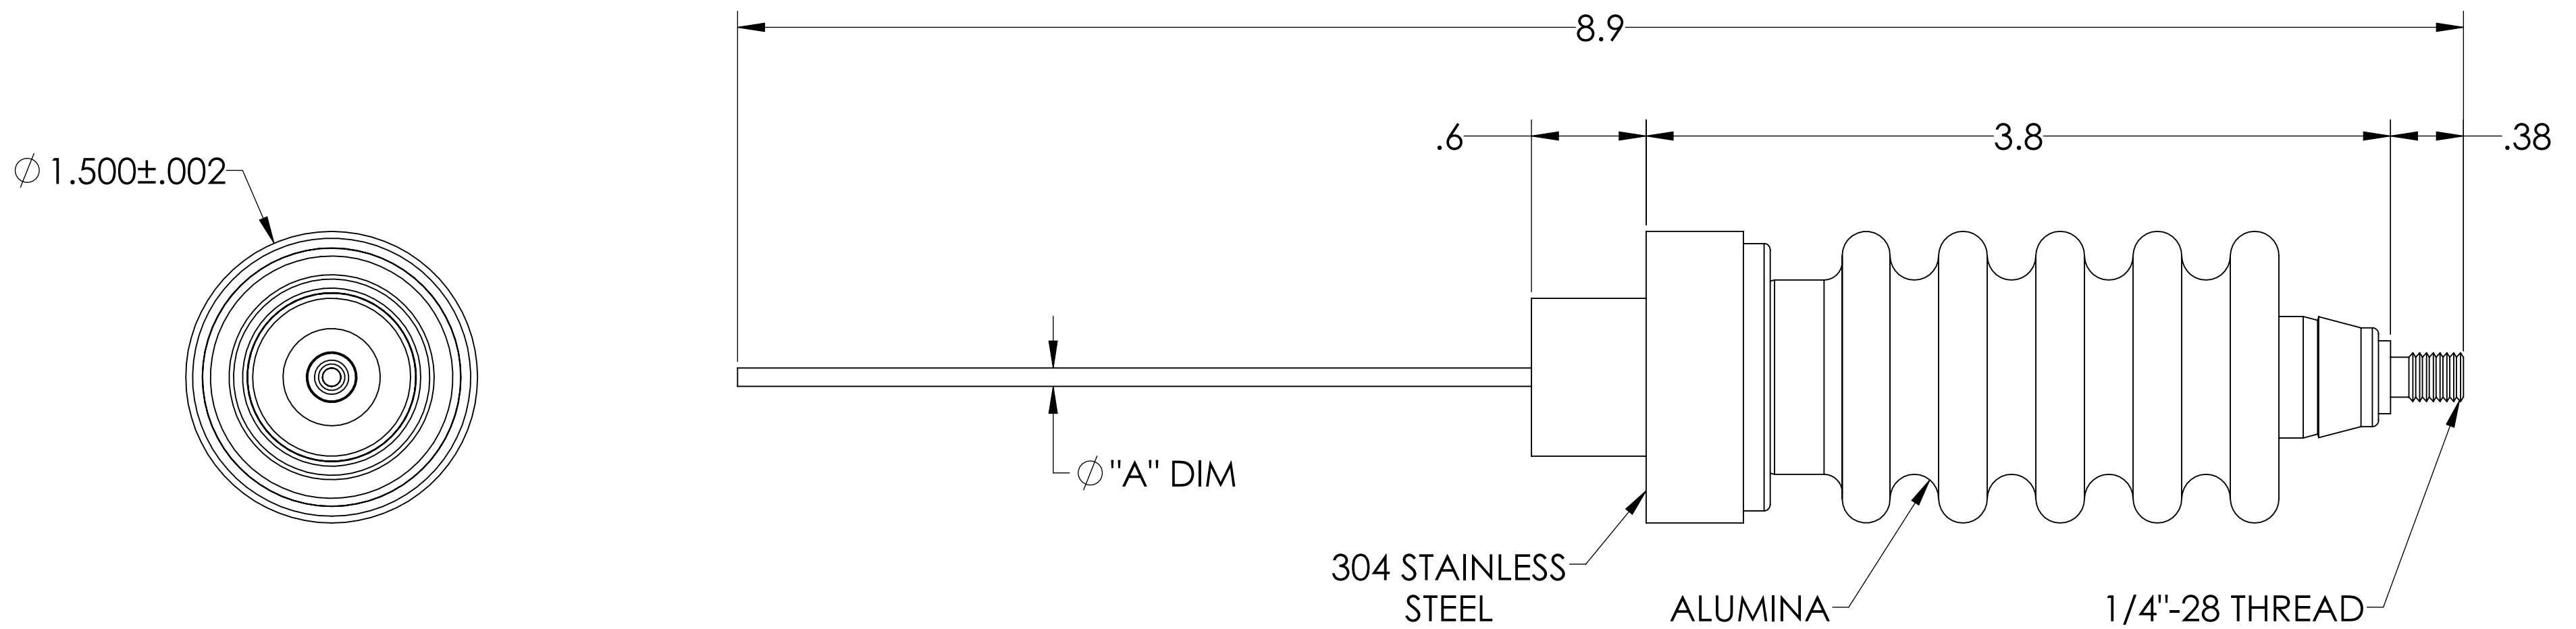


# MPF PRODUCTS INC.

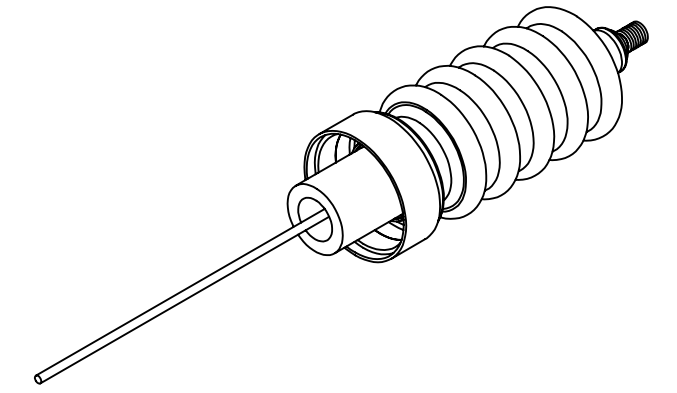

PART #	Ø "A" DIM	CONDUCTOR MATERIAL	CURRENT RATING
A0230-1-W	.094	304 STN STL	3 AMPS
A0230-2-W	.094	OFHC COPPER	50 AMPS
A0230-3-W	.092	NICKEL 200	15 AMPS

**NOTE:**

1. VOLTAGE: 30,000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 30 KV, 1 Pin, 1.500" Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	<b>MPF PRODUCTS INC.</b>	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		<b>POWER FEEDTHROUGH, 30 KV, 1 PIN, 1.500" WELD ADAPTER</b>	
FINISH					
PLATING		APPLICATION: NEXT ASSY:      USED ON:			
SURFACE FINISH:		63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO.	REV.
				A0230	
				Friday, December 7, 2018 1:19:22 PM	