
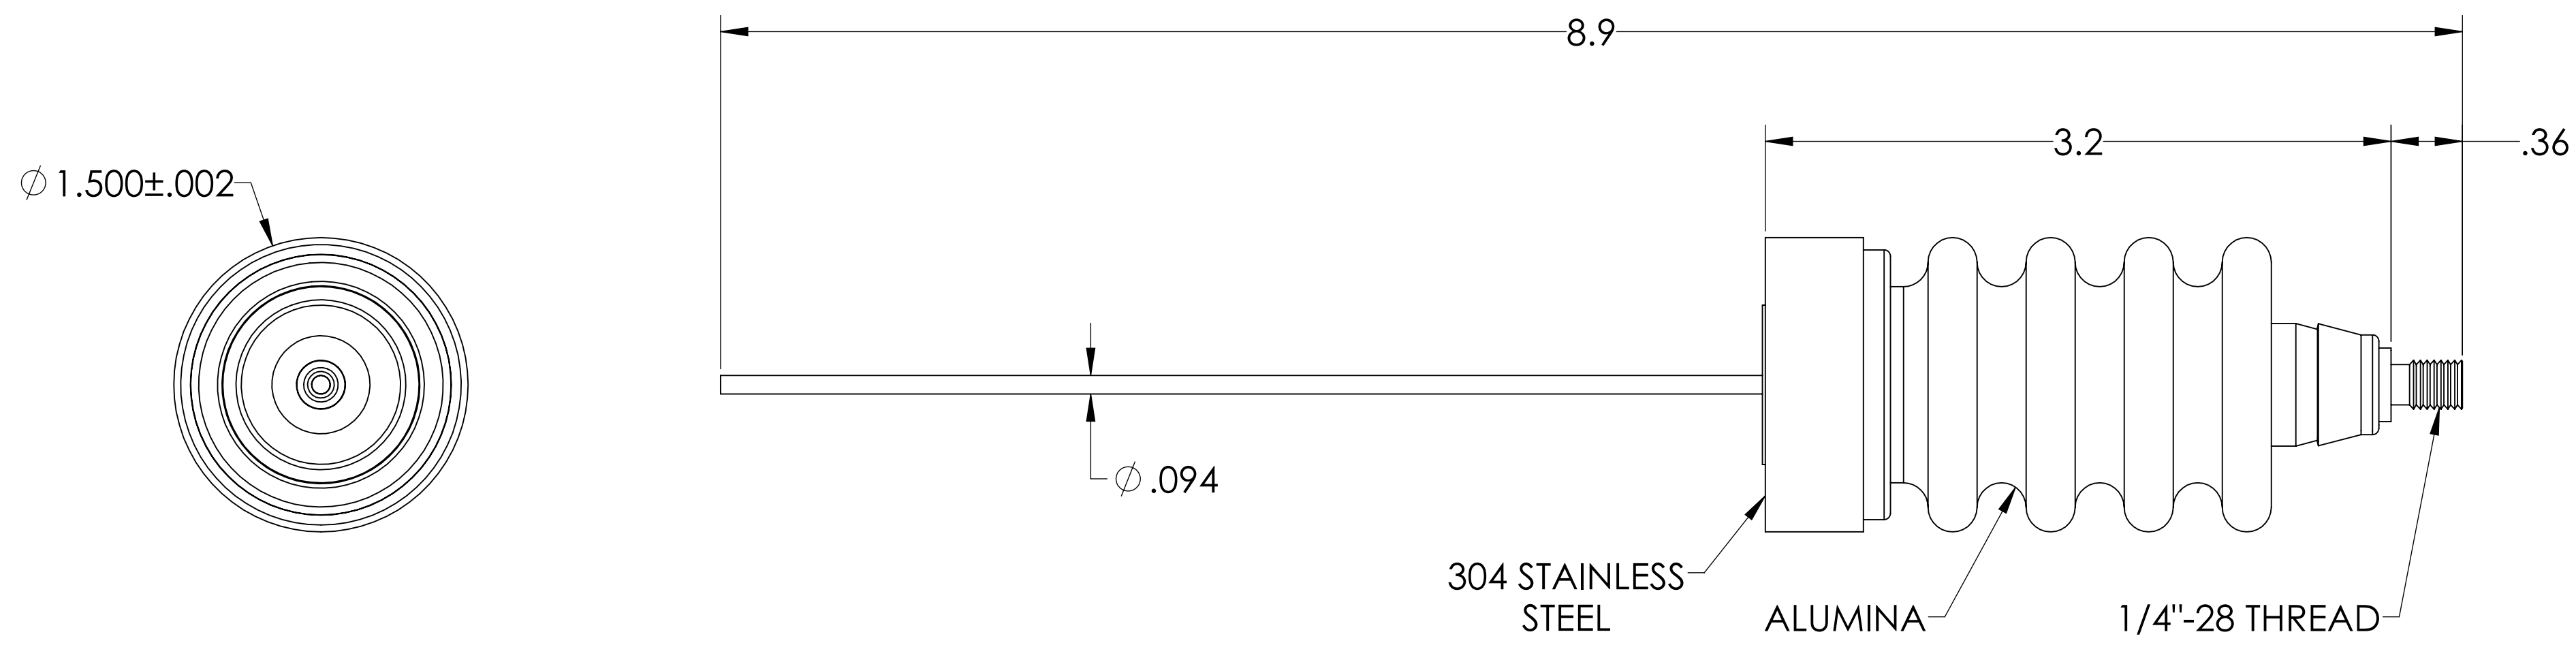


MPF PRODUCTS INC.

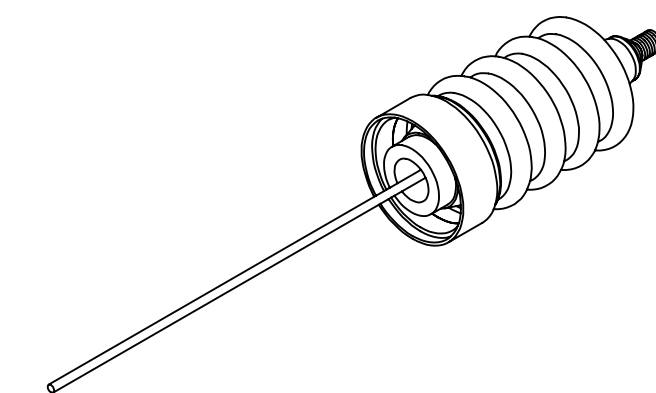

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0231-1-W	304 STN STL	3 AMPS
A0231-2-W	OFHC COPPER	50 AMPS

- NOTE:
1. VOLTAGE: 25,000 VOLTS DC
 2. CURRENT: SEE TABLE
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 25 KV, 1 Pin, .094" Conductor, 1.500" Dia Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$	DRAWN	9/11/2015
TWO PLACE DECIMAL $\pm .030$	CHECKED	9/11/2015
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	TITLE:	POWER FEEDTHROUGH, 25 KV, 1 PIN, 1.500" WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0231
	REV	
	Friday, December 7, 2018 1:18:56 PM	