

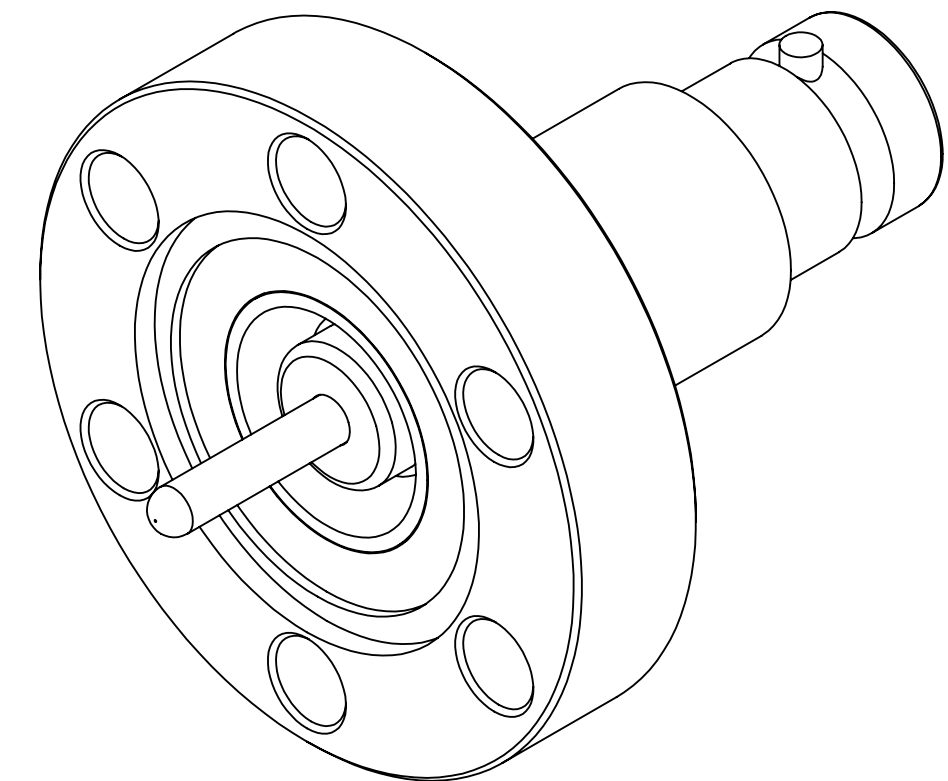


# MPF PRODUCTS INC.

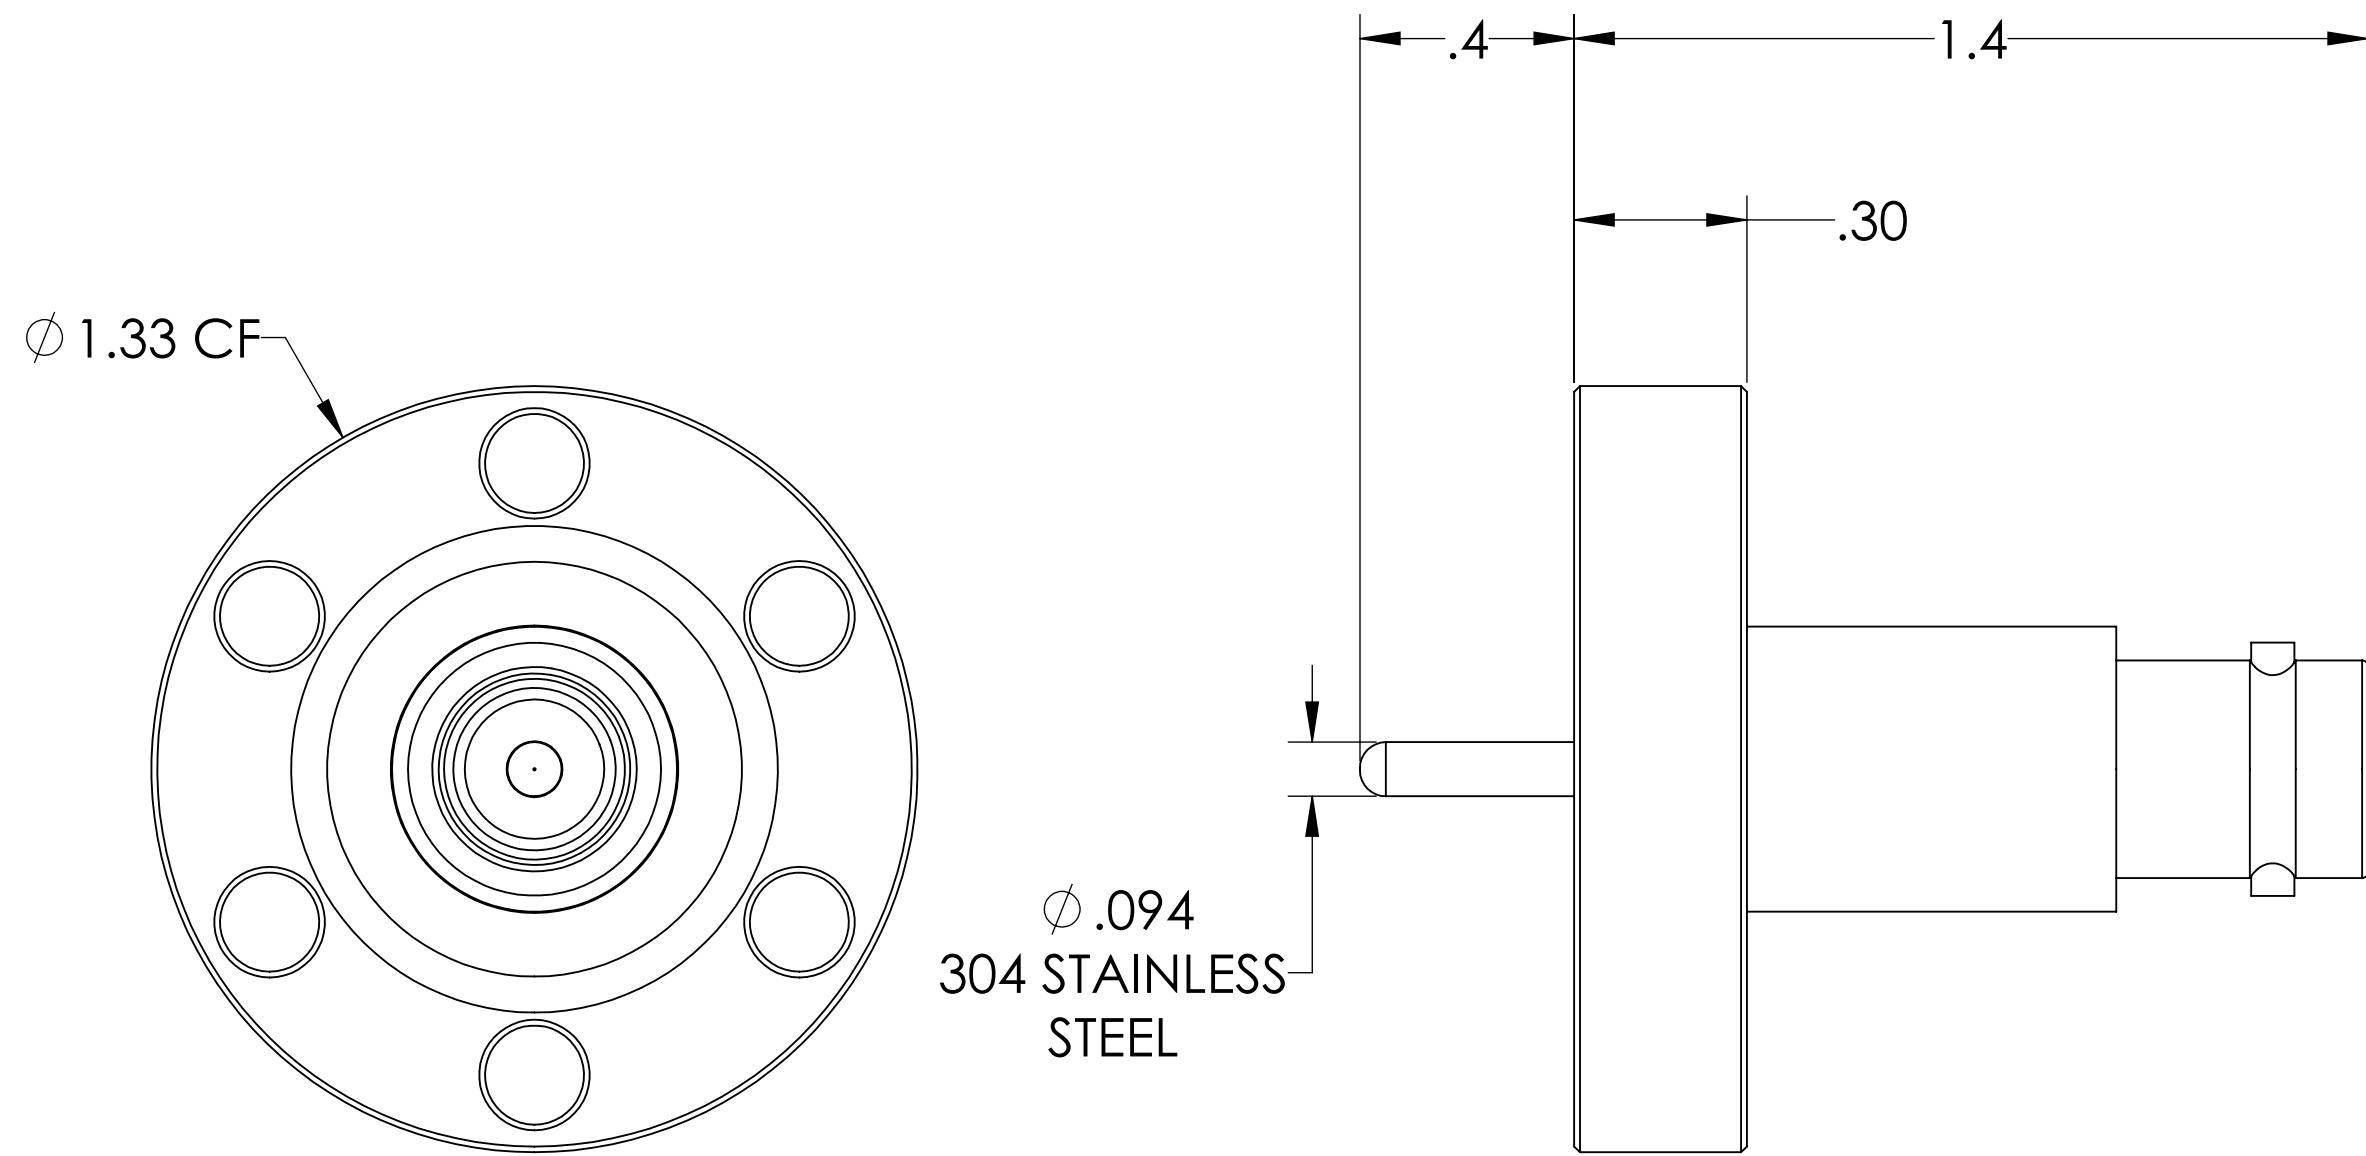

PART #	AIRSIDE CONNECTOR INCLUDED
A0237-1-CF	YES
A0237-2-CF	NO



**NOTE:**

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C ( AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, 1.33" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH $\pm$ 1/2°	DRAWN	9/11/2015
TWO PLACE DECIMAL $\pm$ .030	WJ	9/11/2015
THREE PLACE DECIMAL $\pm$ .015	CHECKED	9/11/2015
	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	TITLE:	<b>MPF PRODUCTS INC.</b>
		BNC COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 1.33" CONFLAT FLANGE
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0237
	REV	
	Thursday, October 4, 2018 8:25:10 AM	