
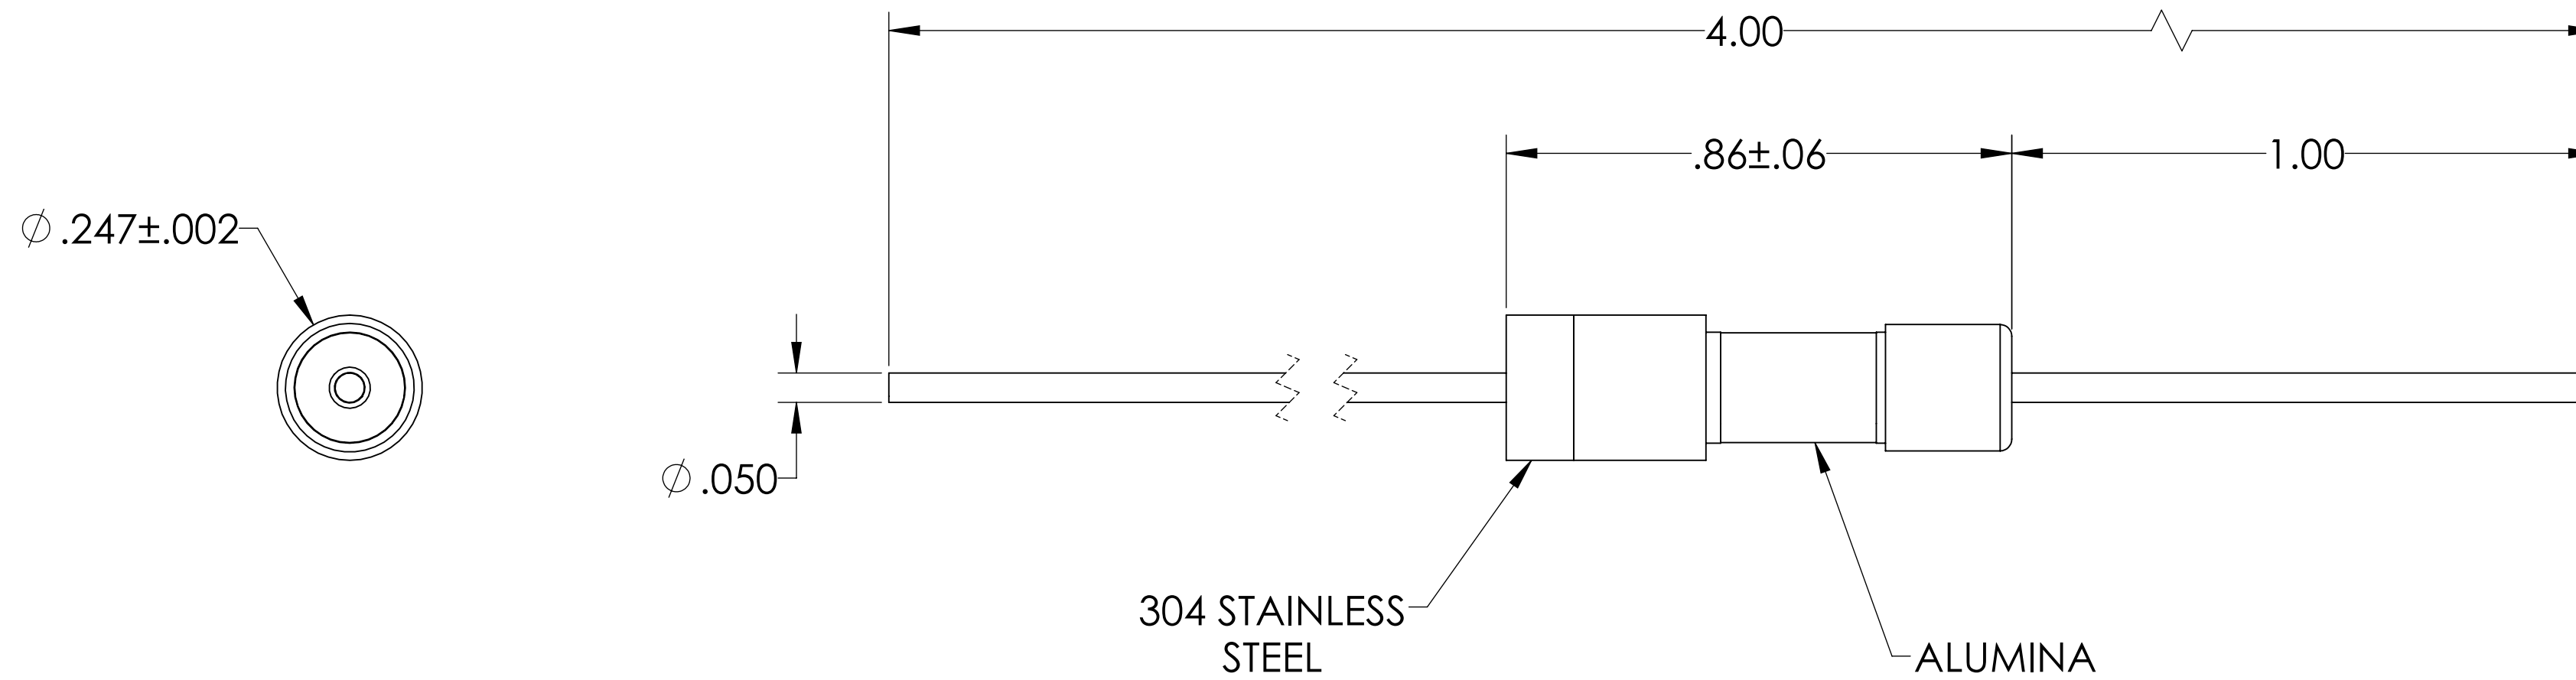


MPF PRODUCTS INC.

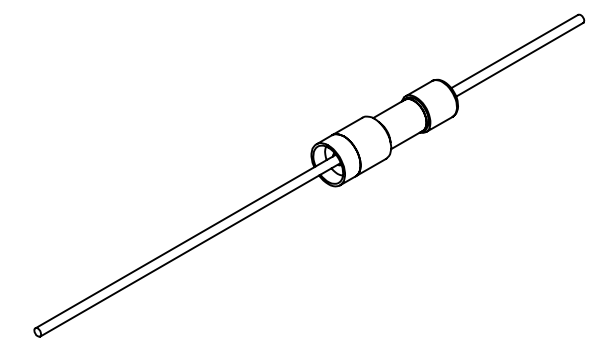

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0263-1-W	OFHC COPPER	25 AMPS
A0263-2-W	NICKEL 200	8 AMPS
A0263-3-W	304 STN STL	1 AMP
A0263-5-W	MOLYBDENUM	13 AMPS

NOTE:

1. VOLTAGE: 5000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 5000 Volts, 1 Pin, 0.050" Conductors, 0.247" Stainless Steel Weld Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	TITLE:	MPF PRODUCTS INC.
		POWER FEEDTHROUGH, 5000 VOLTS, 1 PIN, 0.247" WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0263
	REV	
	Thursday, December 13, 2018 10:28:53 AM	