
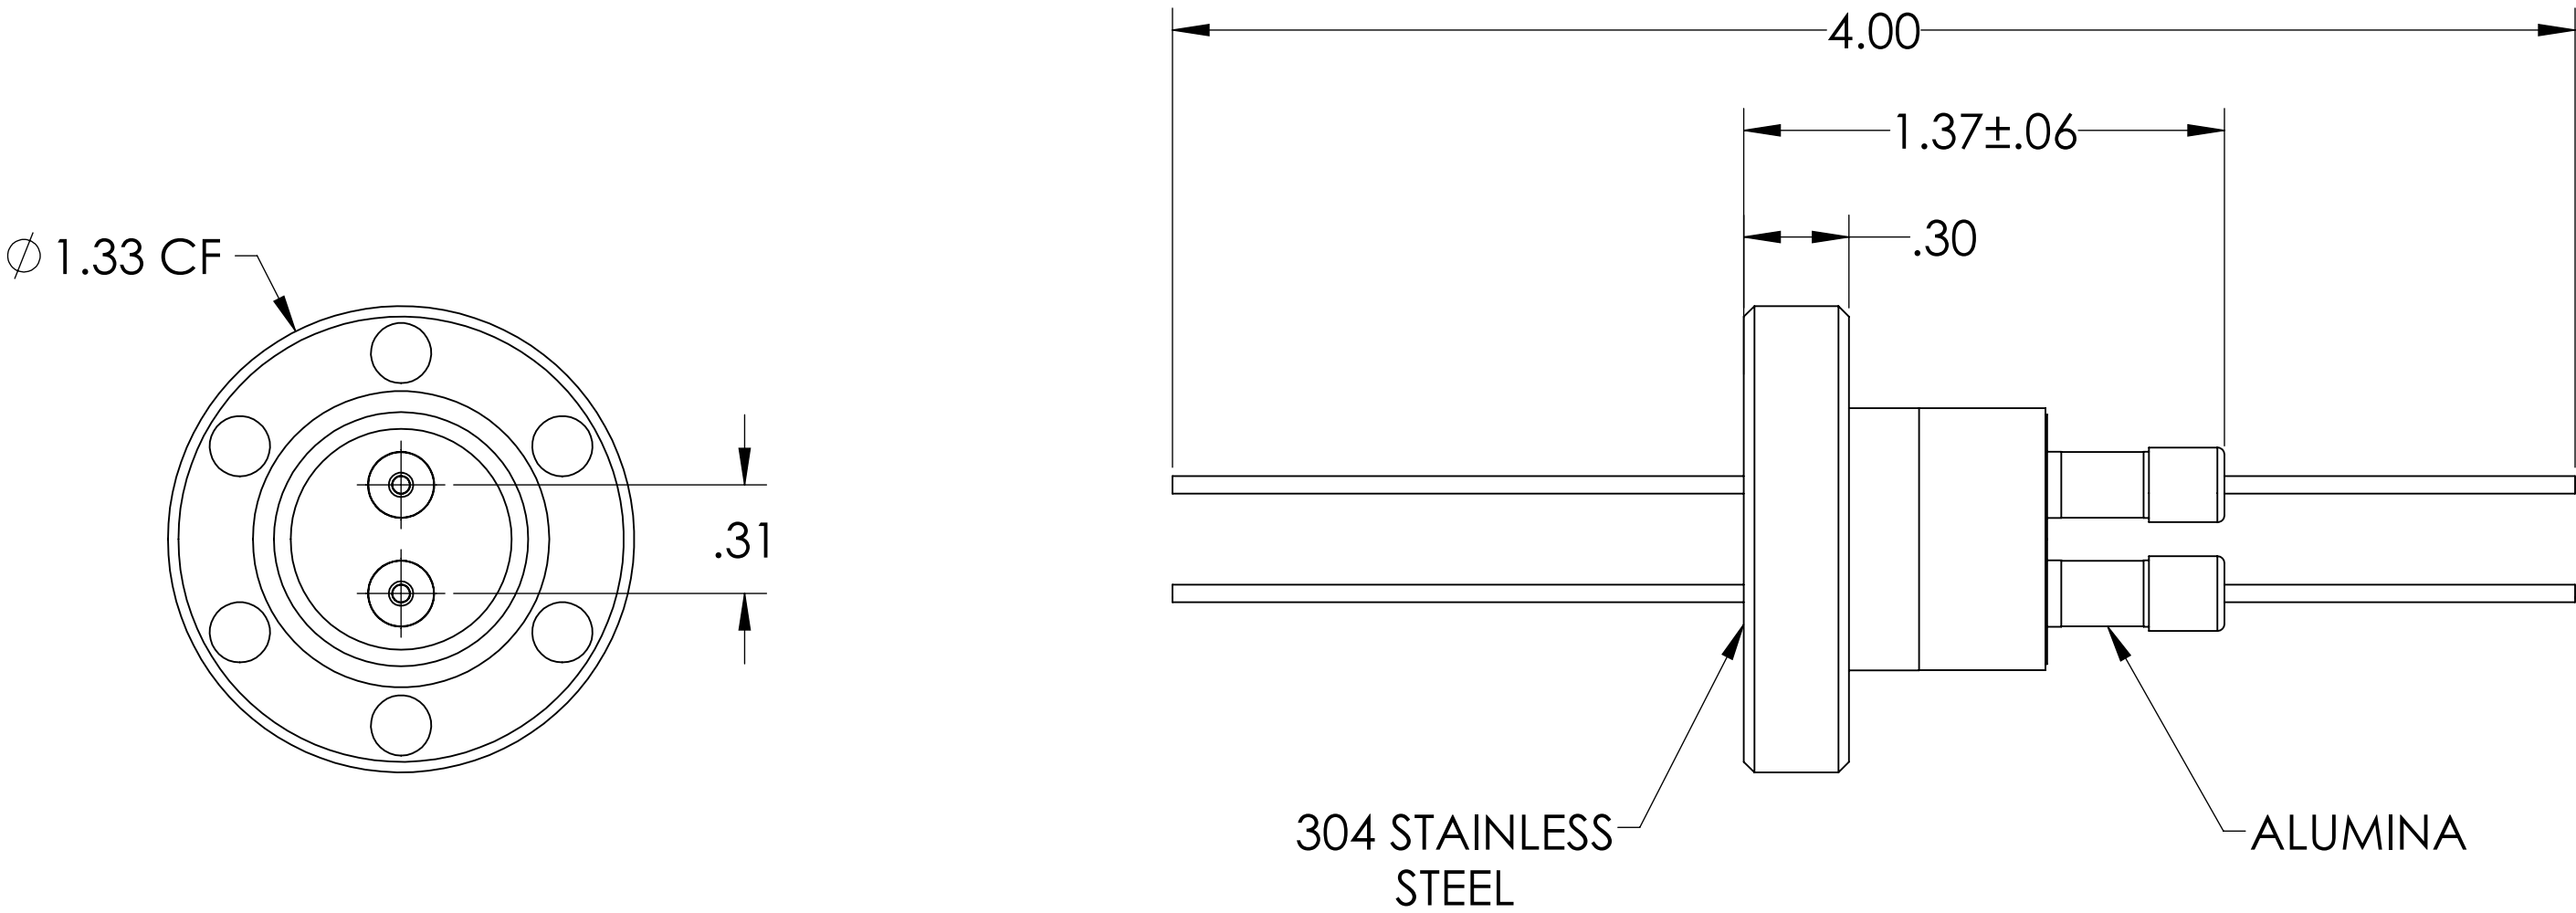


MPF PRODUCTS INC.

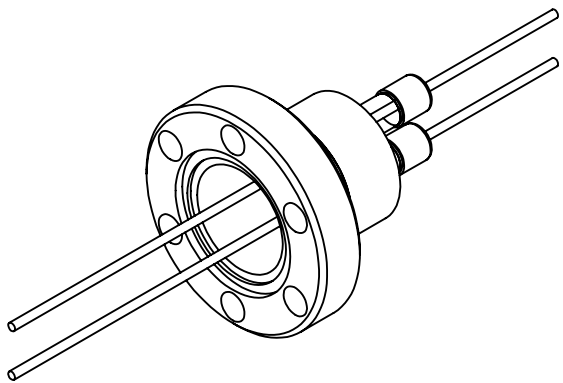

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0269-1-CF	NICKEL 200	8 AMPS
A0269-2-CF	304 STAINLESS STEEL	1 AMP
A0269-3-CF	OFHC COPPER	25 AMPS
A0269-4-CF	MOLYBDENUM	13 AMPS

- NOTE:
- 1. VOLTAGE: 5000 VOLTS DC
  - 2. CURRENT: SEE TABLE
  - 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 5000 Volts, 2 Pins, 0.050" Conductor, 1.33" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC. TITLE:  POWER FEEDTHROUGH, 5000 VOLTS, 2 PINS, 1.33" CONFLAT FLANGE  DOWNLOADED FROM MPFPI.COM DWG. NO. A0269 REV
ANGULAR: MACH ± 1/2°		CHECKED	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		THIRD ANGLE:			
MATERIAL					
		APPLICATION			
		NEXT ASSY			USED ON
FINISH		SURFACE FINISH: 63/ OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Friday, January 18, 2019 11:17:55 AM