
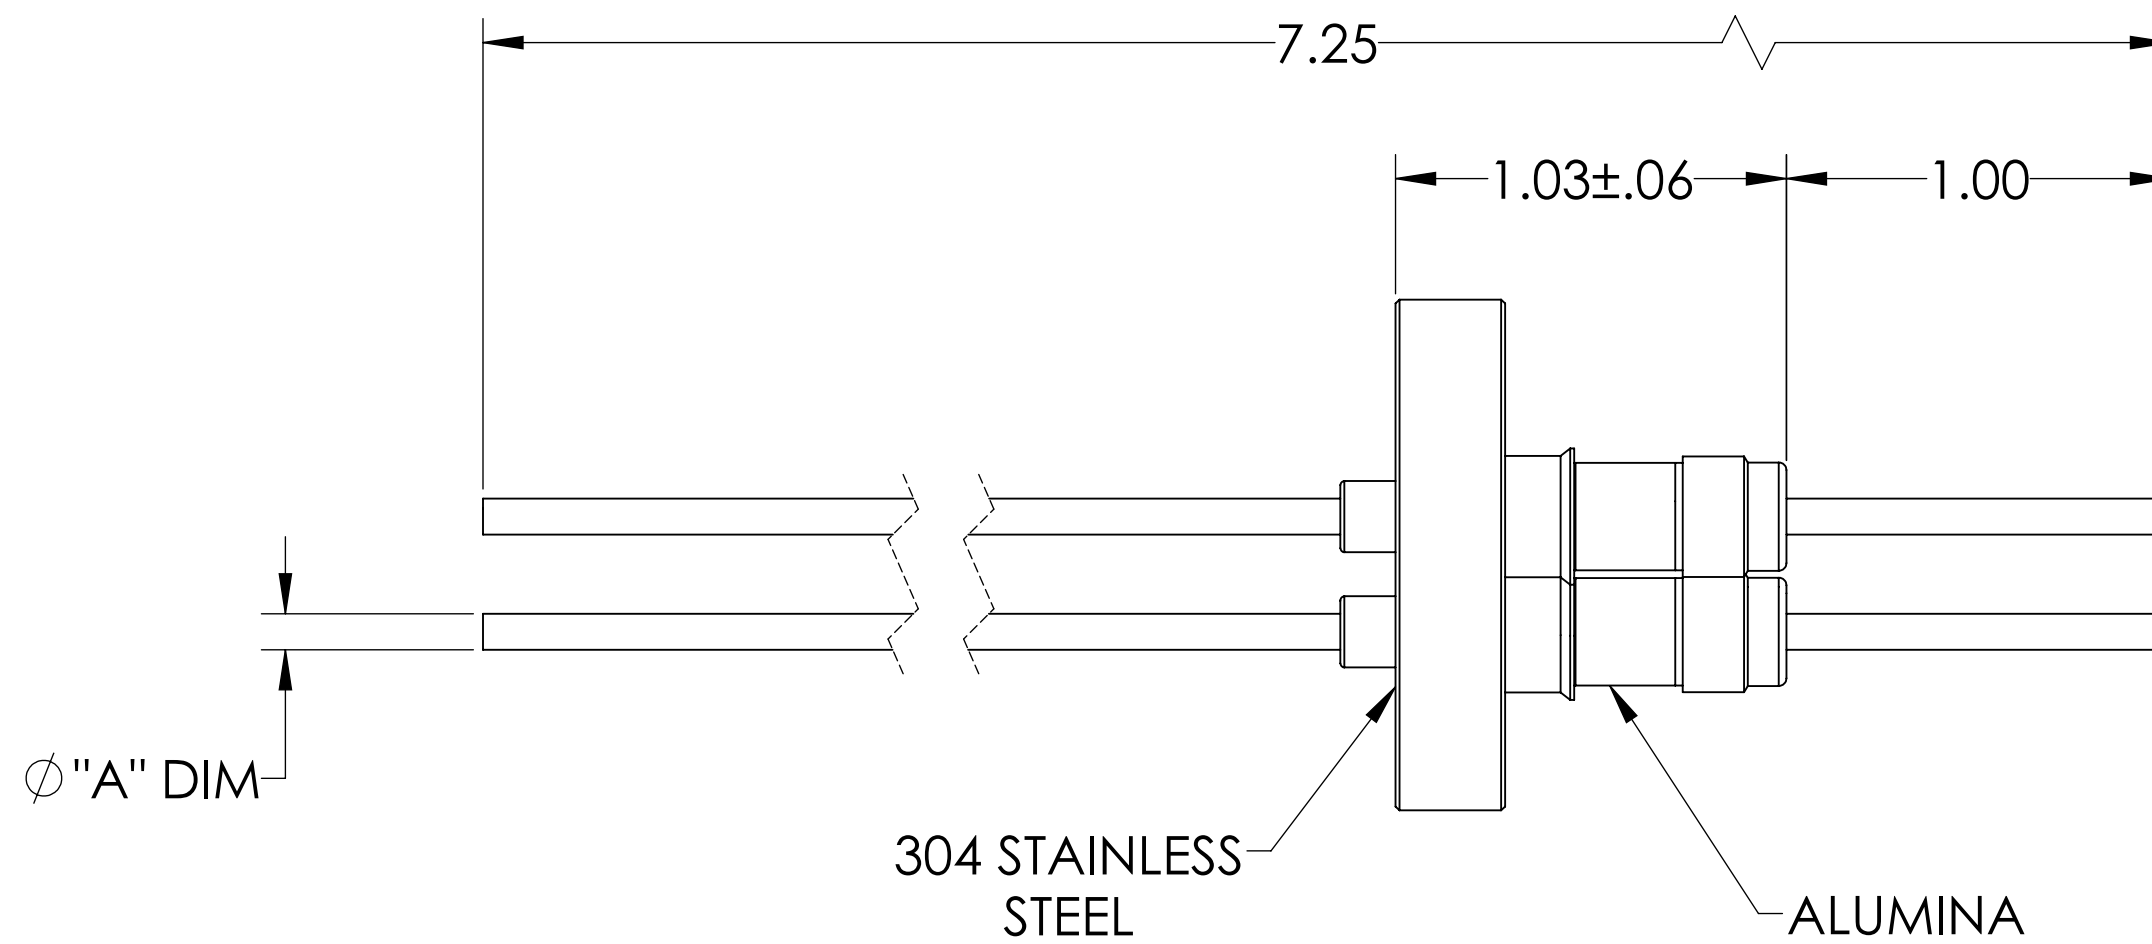
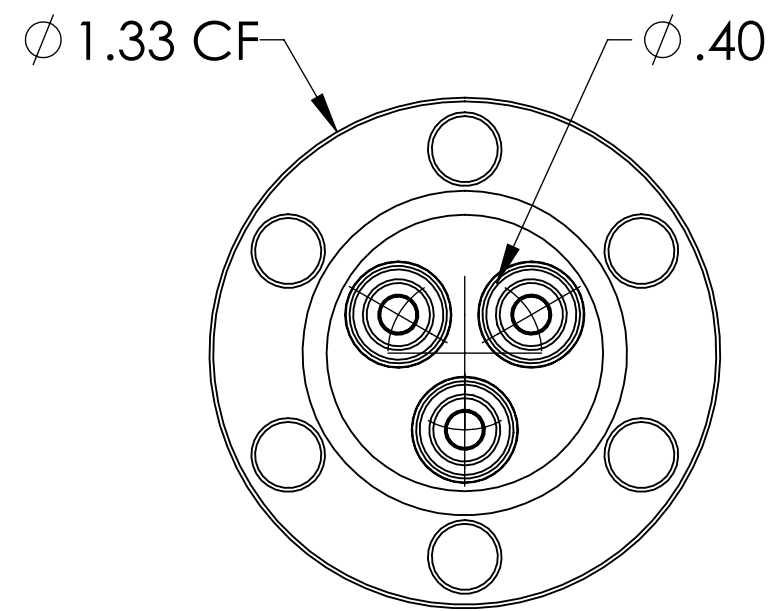


MPF PRODUCTS INC.

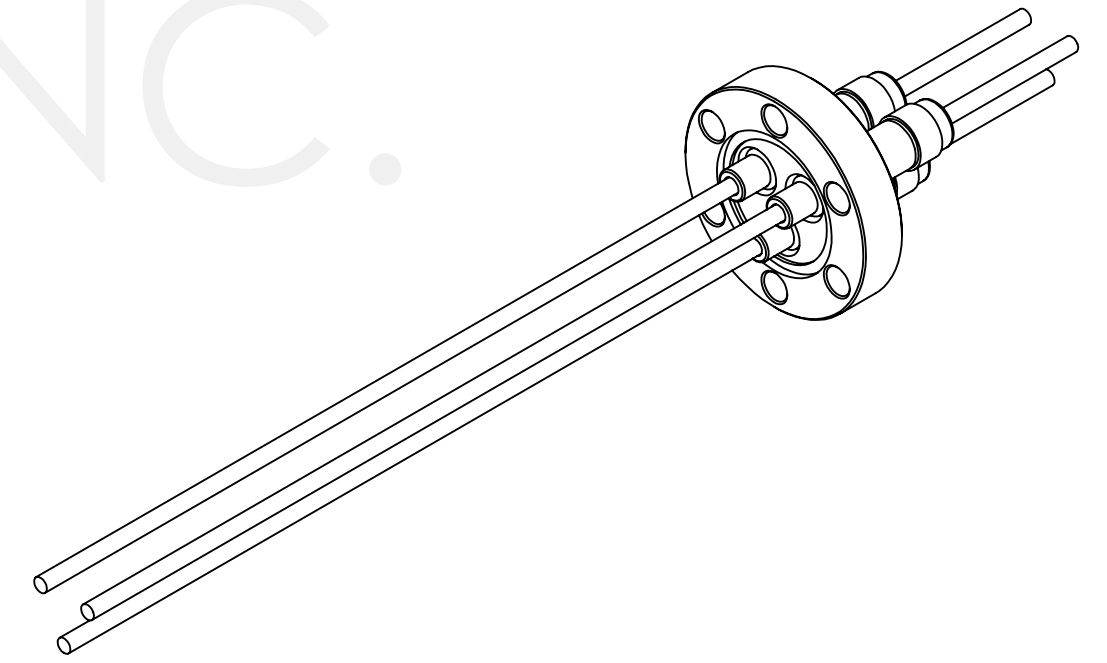

PART #	CONDUCTOR MATERIAL	"A" DIM	CURRENT RATING
A0277-1-CF	OFHC COPPER	.094	50 AMPS
A0277-2-CF	NICKEL 200	.092	15 AMPS
A0277-5-CF	MOLYBDENUM	.094	28 AMPS

- NOTE:
1. VOLTAGE: 5000 VOLTS DC
 2. CURRENT: SEE TABLE
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 5000 Volts, 3 Pins, 1.33" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION		
PLATING	SURFACE FINISH:	63 OR BETTER	
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	DOWNLOADED FROM MPFPI.COM	DWG. NO. A0277	
	Monday, December 3, 2018 9:27:17 AM	REV	