

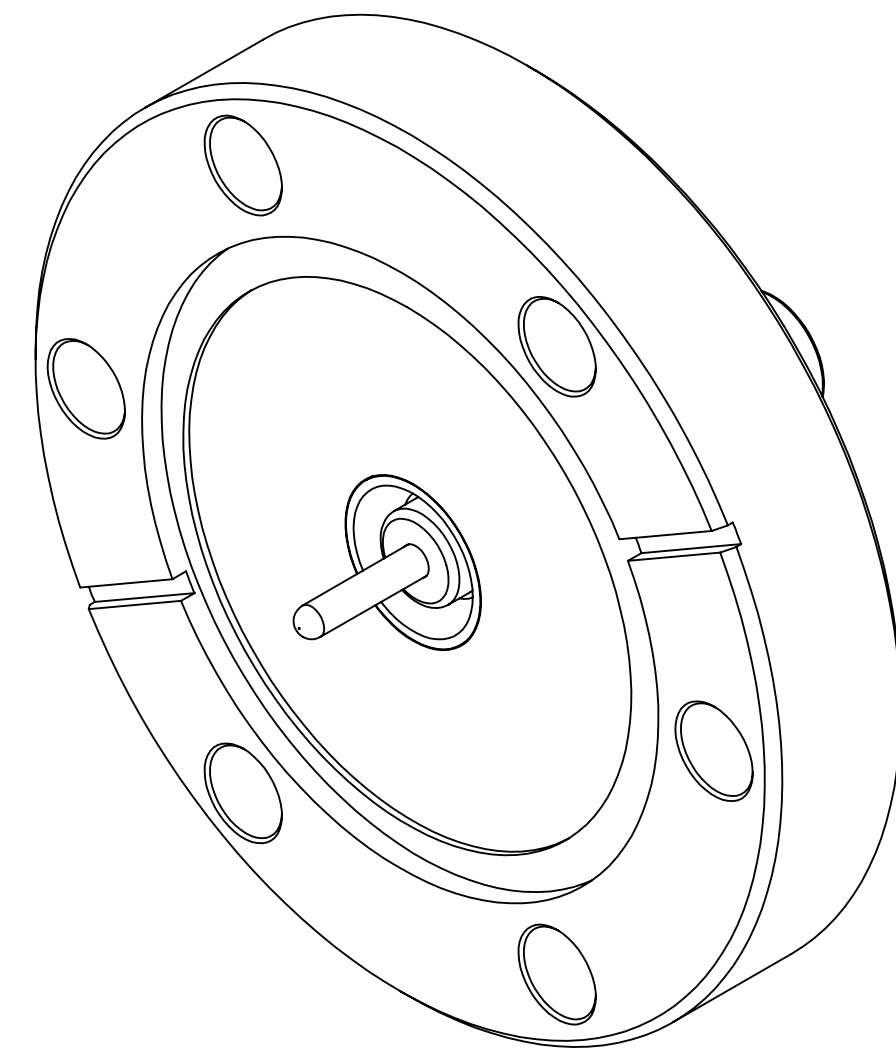
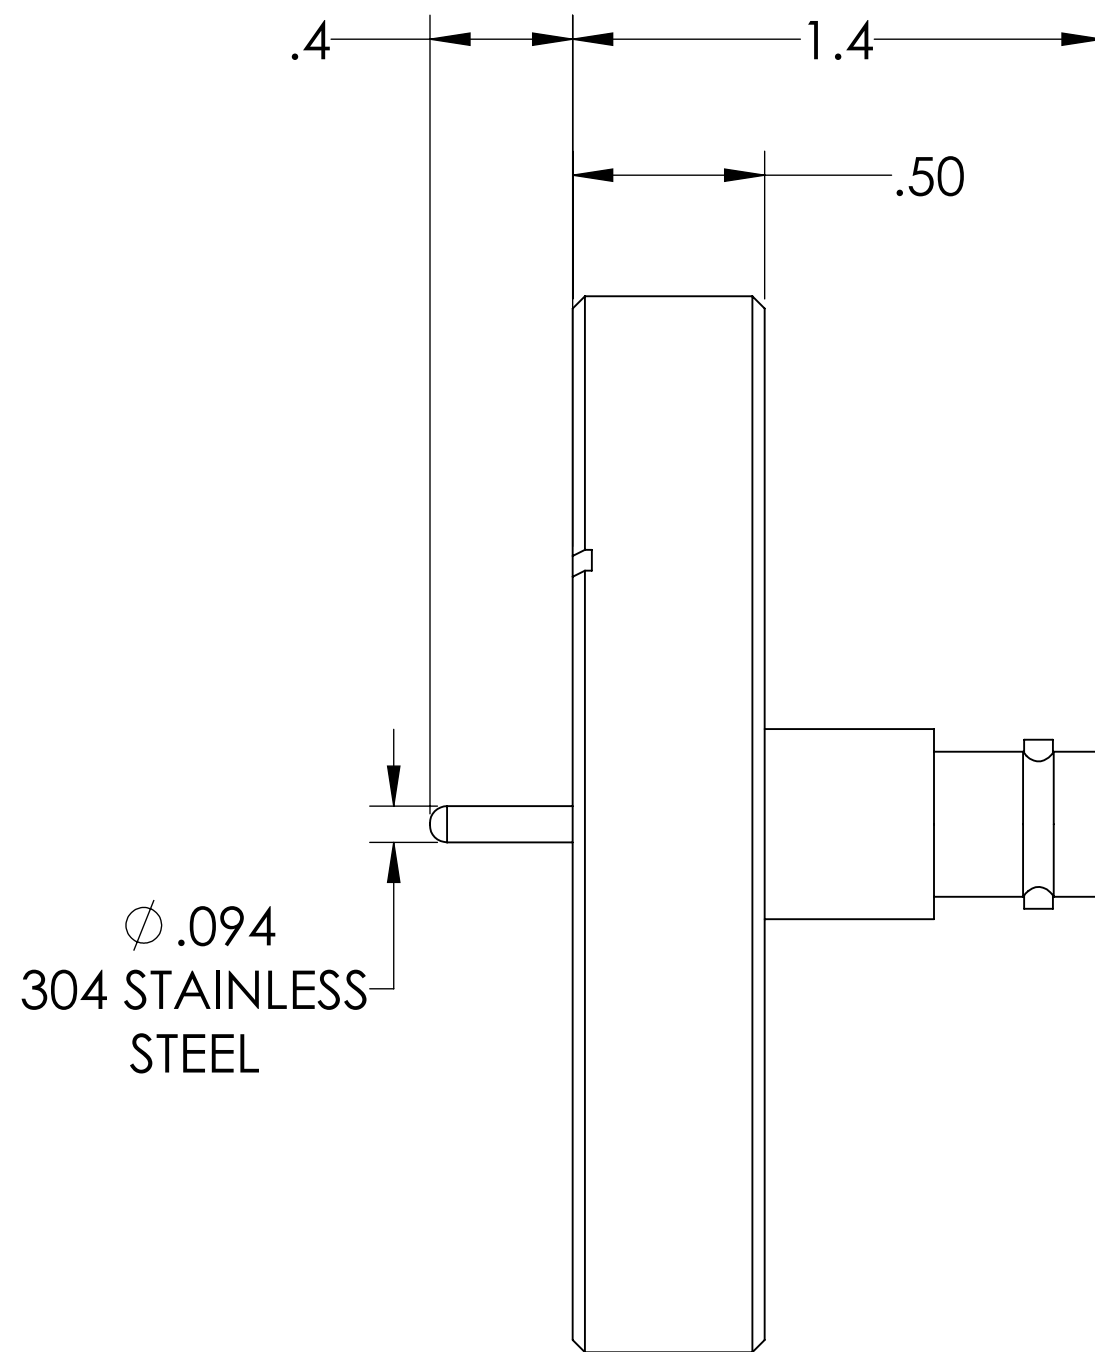


# MPF PRODUCTS INC.

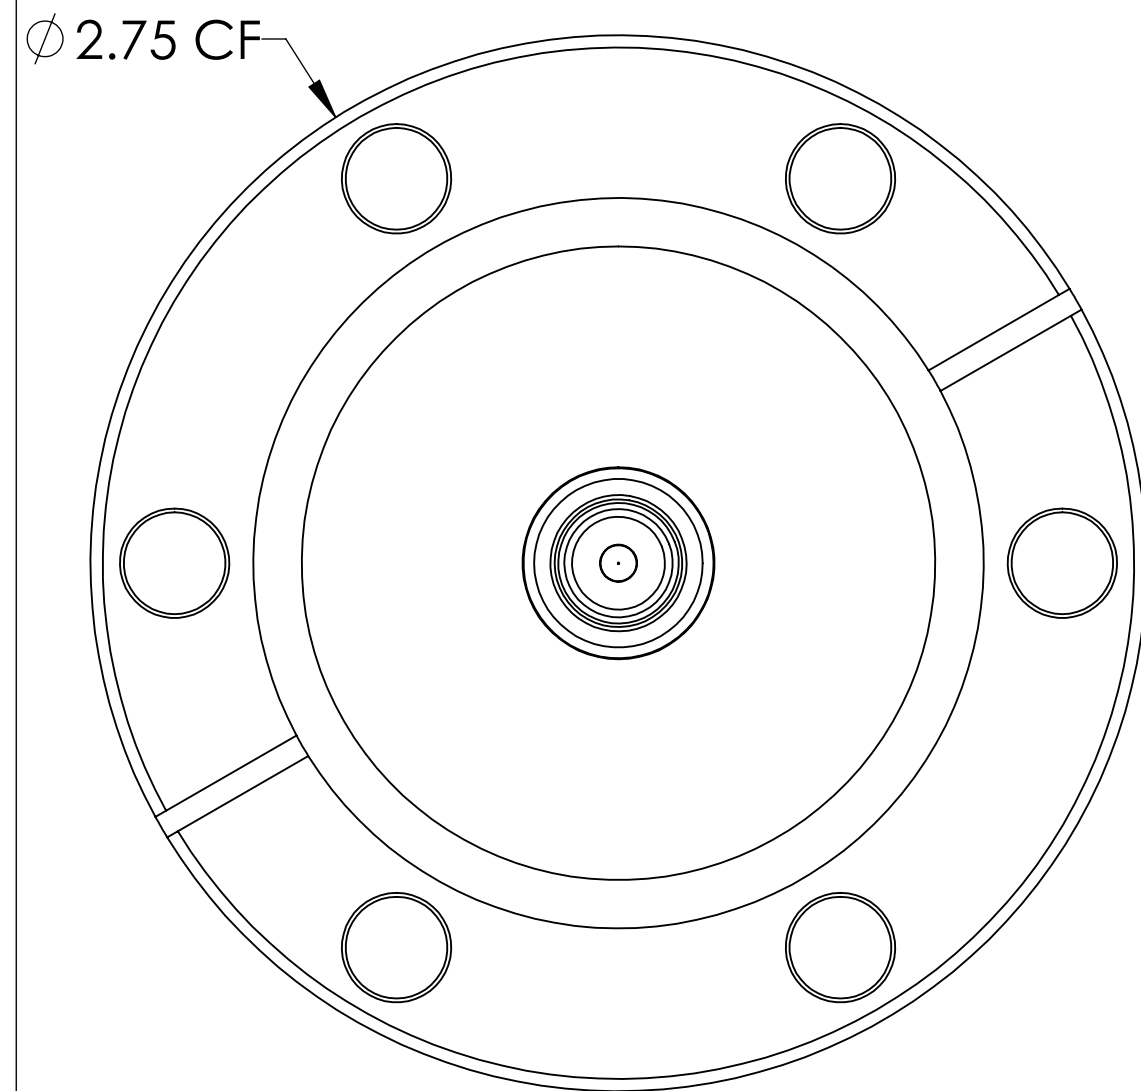

PART #	AIRSIDE CONNECTOR INCLUDED
A0289-1-CF	YES
A0289-2-CF	NO



**NOTE:**

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C ( AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, 2.75" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE				
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015				
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015				
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015				
MATERIAL	THIRD ANGLE:						
FINISH	APPLICATION	<table border="1"> <tr> <th>NEXT ASSY</th> <th>USED ON</th> </tr> <tr> <td> </td> <td> </td> </tr> </table>		NEXT ASSY	USED ON		
NEXT ASSY	USED ON						
PLATING	SURFACE FINISH:	$\sqrt{63}$ OR BETTER					
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
	TITLE:	<b>MPF PRODUCTS INC.</b> BNC COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 2.75" CONFLAT FLANGE					
	DOWNLOADED FROM MPFPI.COM	DWG. NO. <b>A0289</b> REV					
	Thursday, October 4, 2018 8:23:31 AM						