

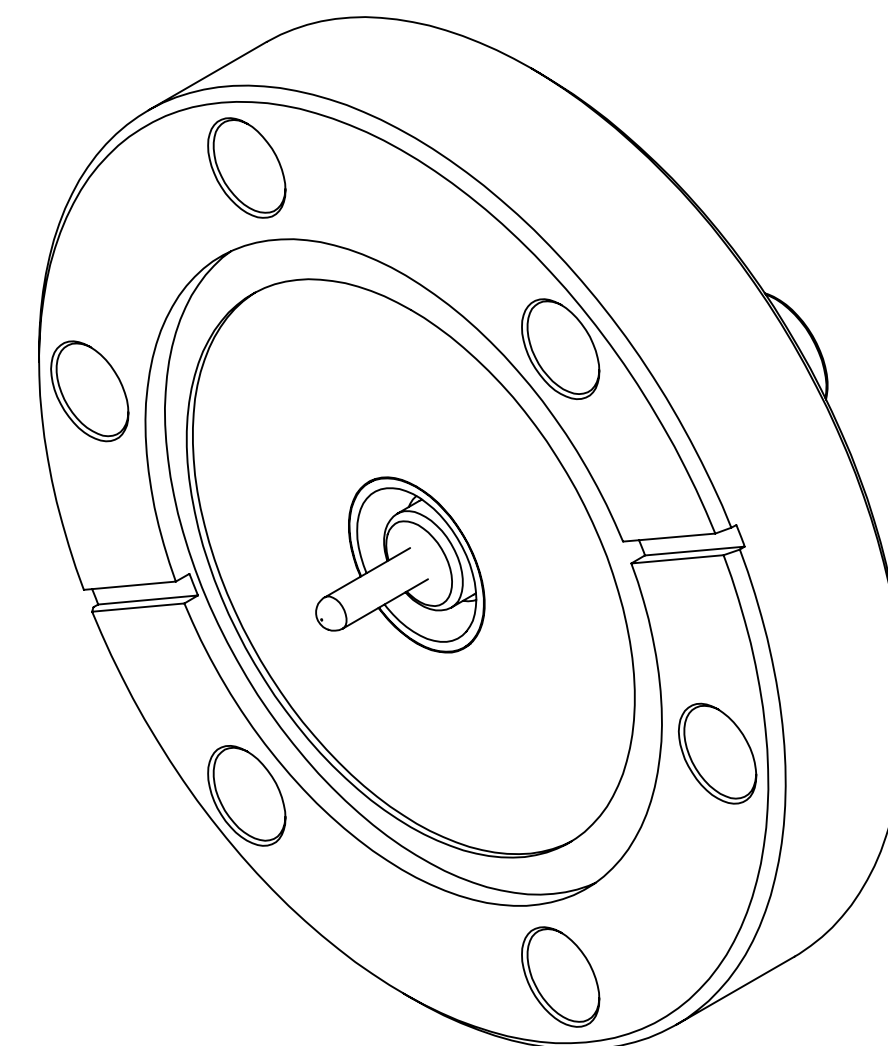


# MPF PRODUCTS INC.

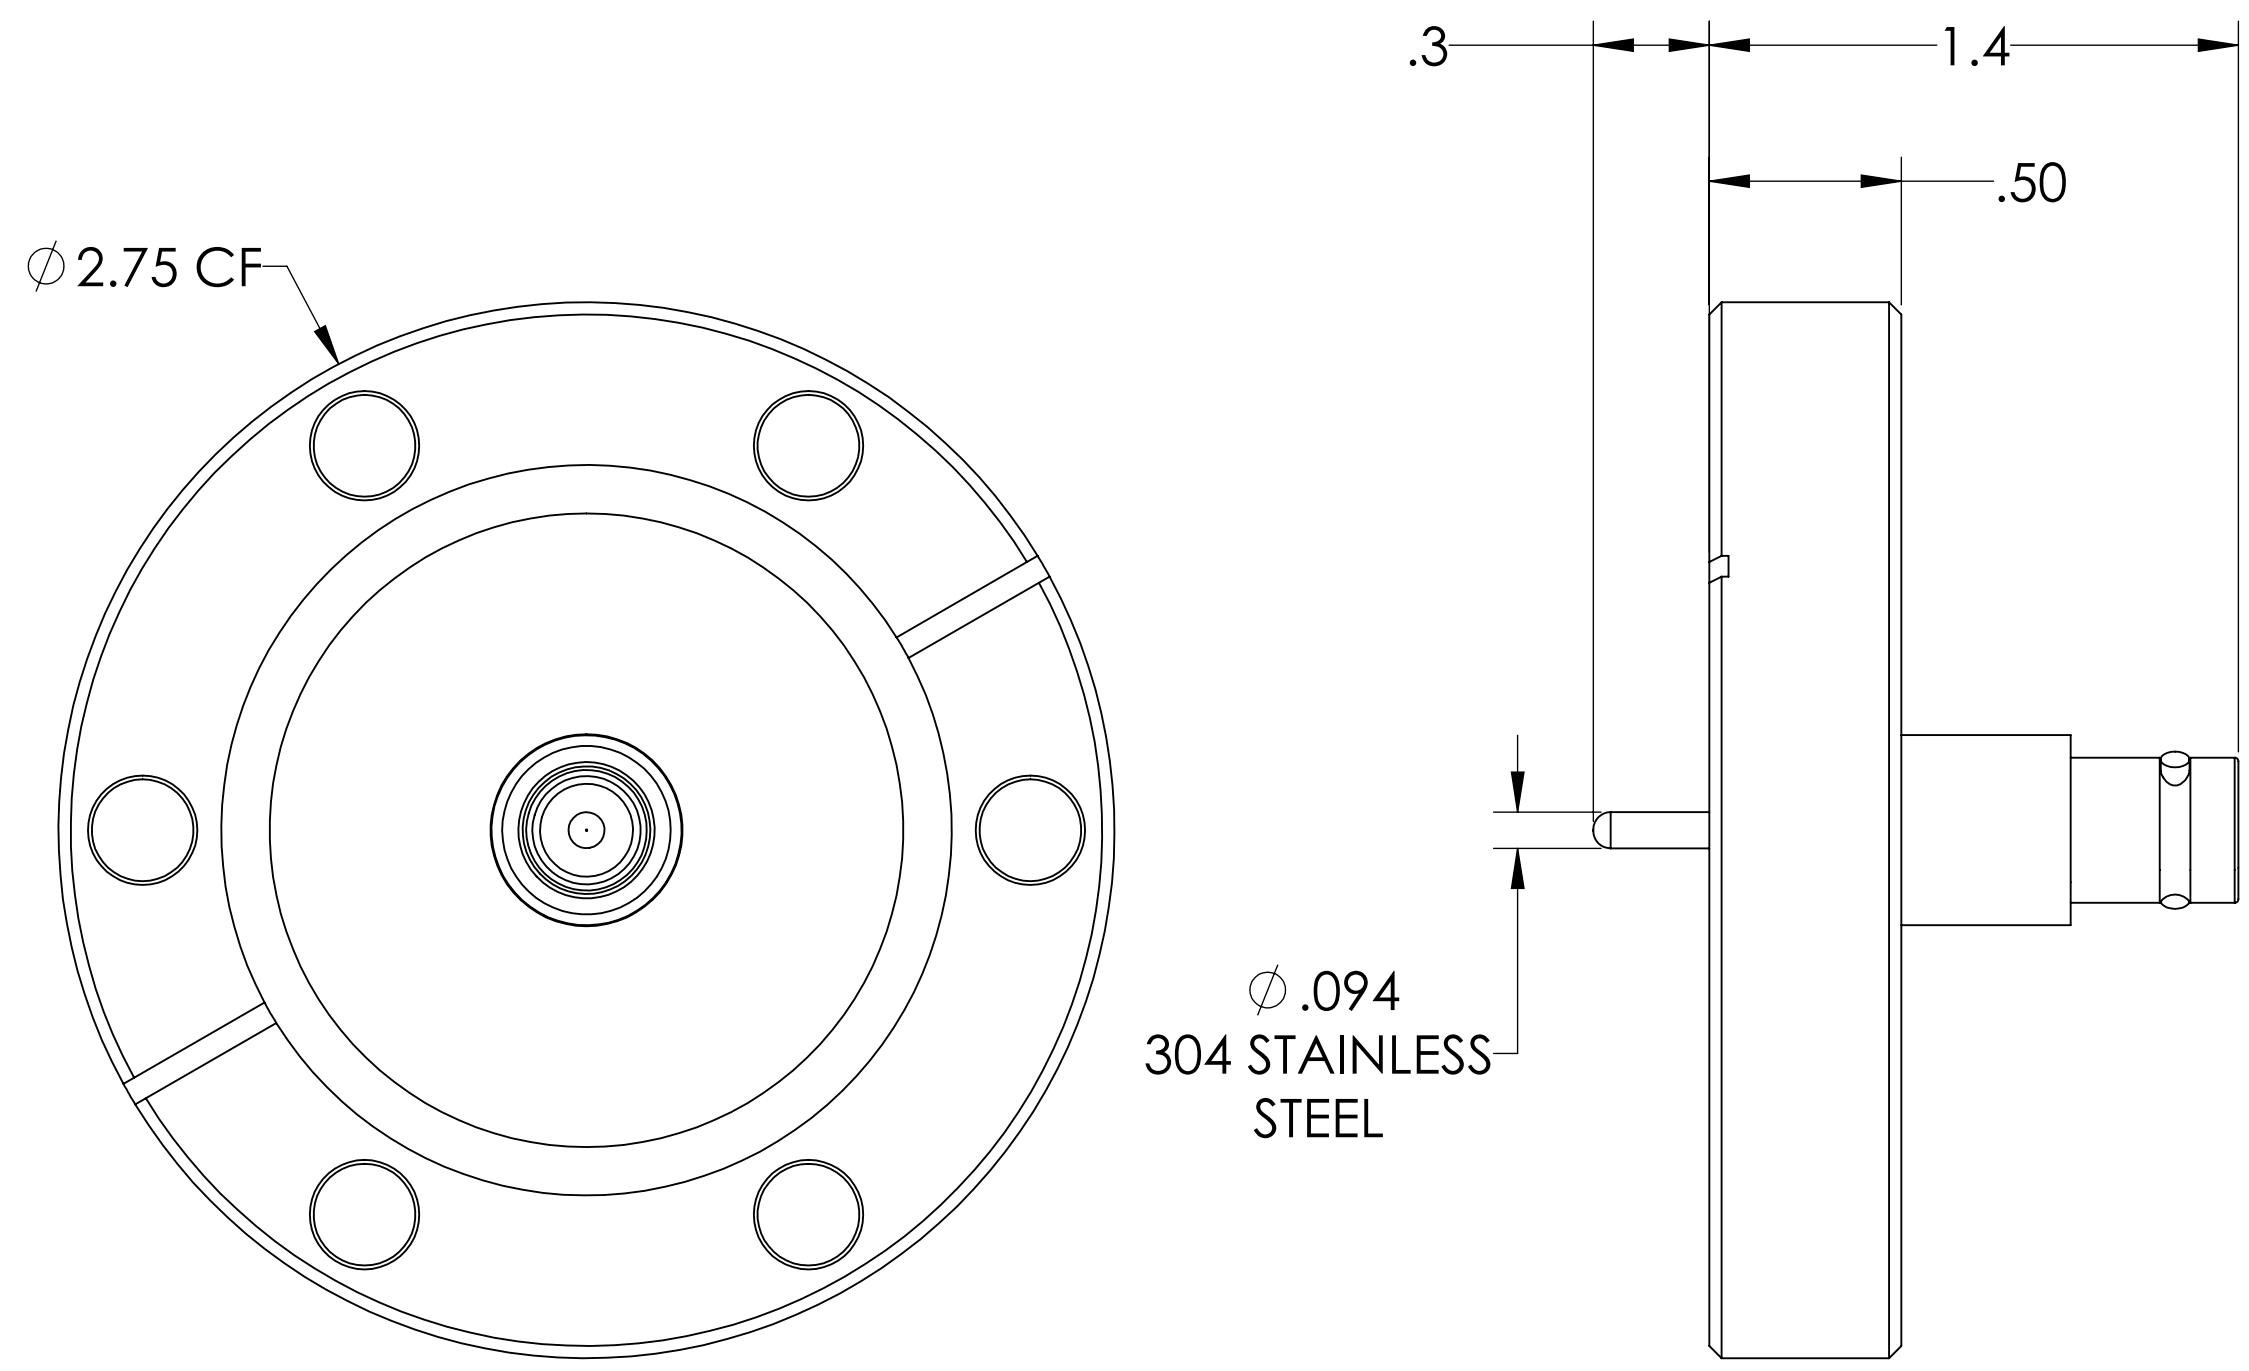

PART #	AIRSIDE CONNECTOR INCLUDED
A0290-1-CF	YES
A0290-2-CF	NO

- NOTE:
1. SHIELD: GROUNDED
  2. VOLTAGE: 5000 VOLTS DC
  3. CURRENT: 3 AMPS
  4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
  5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1 Pin, Grounded Shield, 2.75" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	TITLE:	MPF PRODUCTS INC.
		MHV COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 2.75" CONFLAT FLANGE
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0290
	REV	
	Thursday, October 4, 2018 8:22:31 AM	