



MPF PRODUCTS INC.

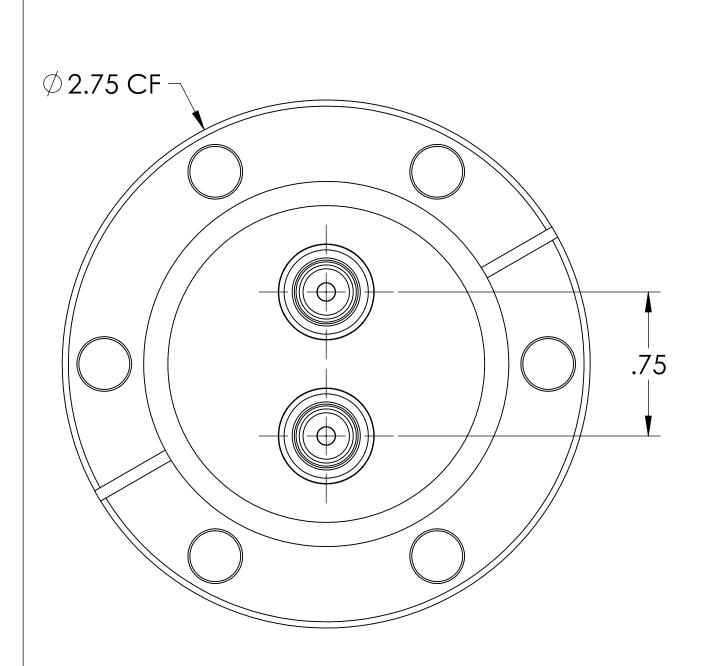

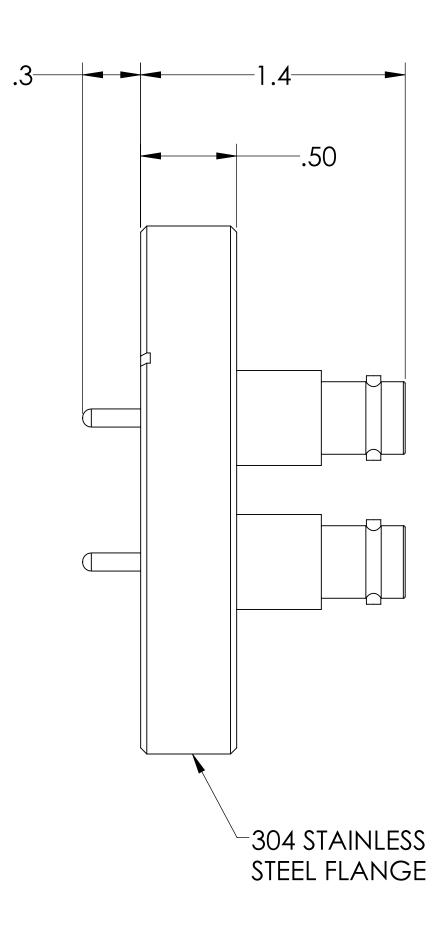

INCLUDED
YES
NO

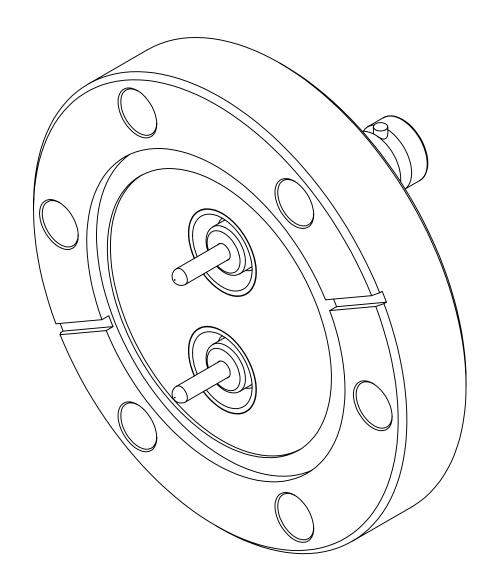



NOTE:

- 1. SHIELD: GROUNDED
- 2. VOLTAGE: 5000 VOLTS DC
- 3. CURRENT: 3 AMPS
- 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
- 5. IMPEDANCE: NON-CONSTANT

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
TOLLINATIOLS.	DRAWN	WJ	9/11/2015	MELLING.	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITLE:	
	ENG APPR.	WJ	9/11/2015	MHV COAXIAL	
	THIRD AND	EE:	•		
MATERIAL				FEEDTHROUGH, 2 PINS, GROUNDED SHIELD, 2.75" CONFLAT FLANGE	
	APPLICATION NEXT ASSY USED ON		ON USFD ON	CONTEATTEANOL	
			0022 014	DOWNLOADED FROM MPFPI.COM	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWG. NO. REV	
	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		SPECIFIED:	A0292	
PLATING				Friday, January 18, 2019 8:17:36 AM	
CHEET 1 OF 1					

MHV Coaxial Feedthrough, 2 Pins, Grounded Shield, 2.75" Conflat Flange, UHV Compatible