



MPF PRODUCTS INC.

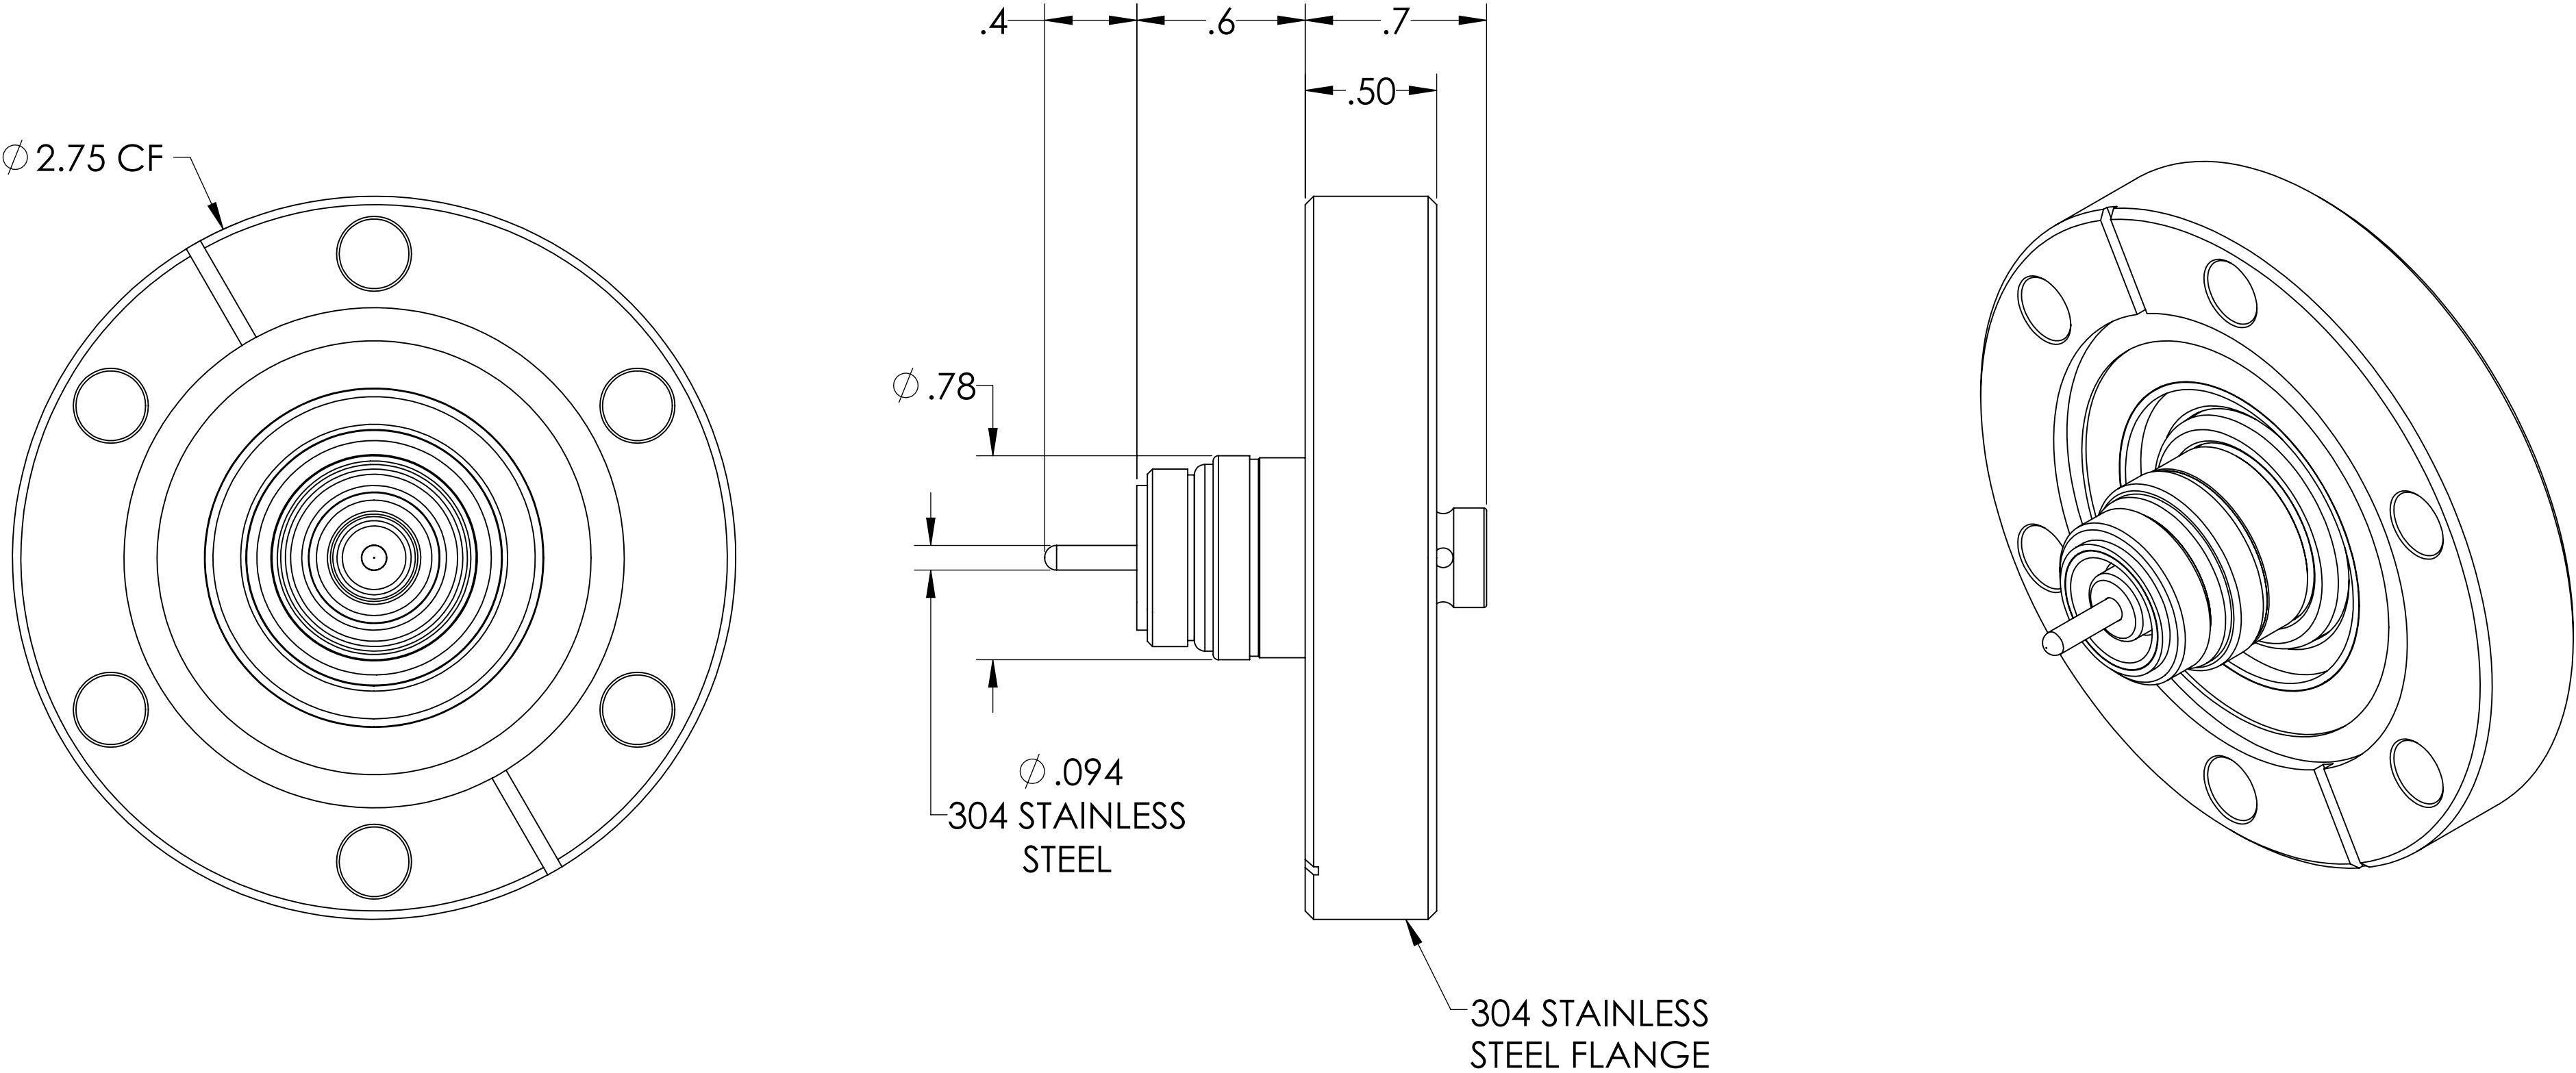

PART #	AIRSIDE CONNECTOR INCLUDED
A0305-1-CF	YES
A0305-2-CF	NO

- NOTE:
- 1. SHIELD: FLOATING
 - 2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 500V PIN TO SHEILD
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1 Pin, Floating Shield, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015		DRAWN	WJ	DATE	9/11/2015
		CHECKED			9/11/2015
		ENG APPR.	WJ		9/11/2015
		THIRD ANGLE:			
MATERIAL				APPLICATION NEXT ASSY USED ON	
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		TITLE:		MPF PRODUCTS INC.	
				MHV COAXIAL FEEDTHROUGH, 1 PIN, FLOATING SHIELD, 2.75" CONFLAT FLANGE	
				DOWNLOADED FROM MPFPI.COM	
		DWG. NO.		A0305	
				REV	
				Saturday, January 19, 2019 9:35:48 AM	