

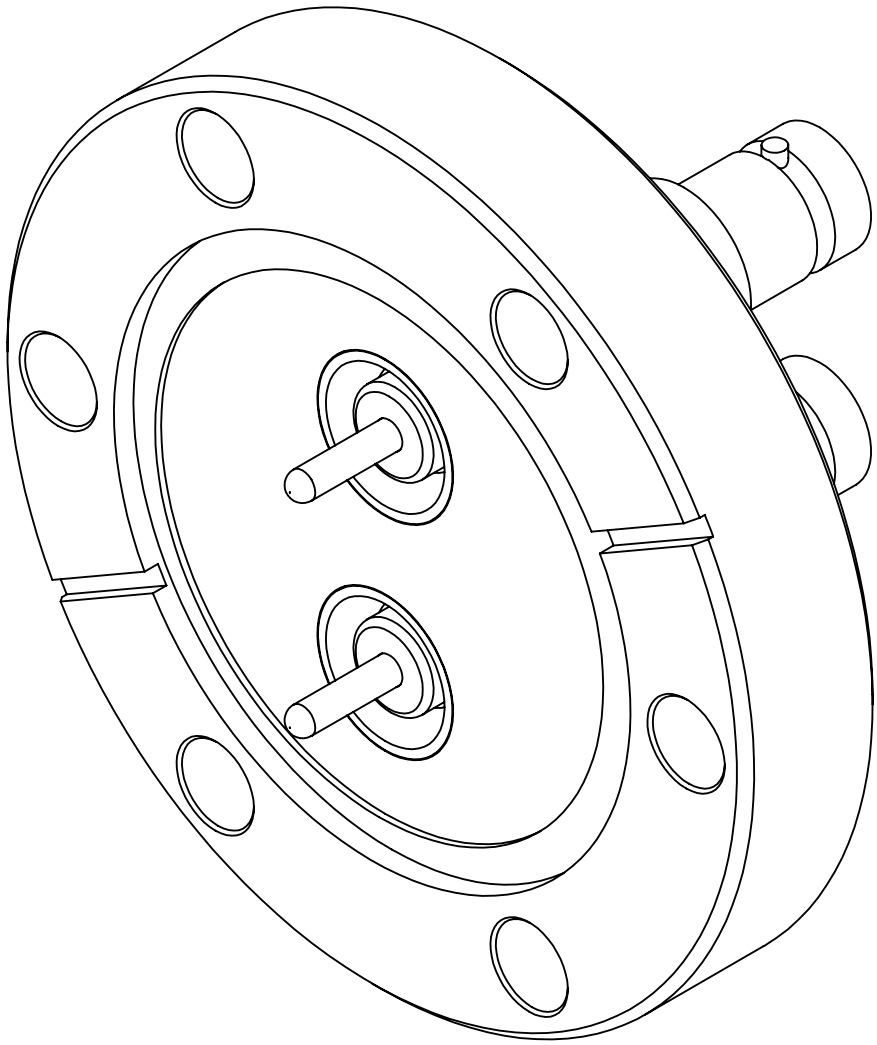


MPF PRODUCTS INC.

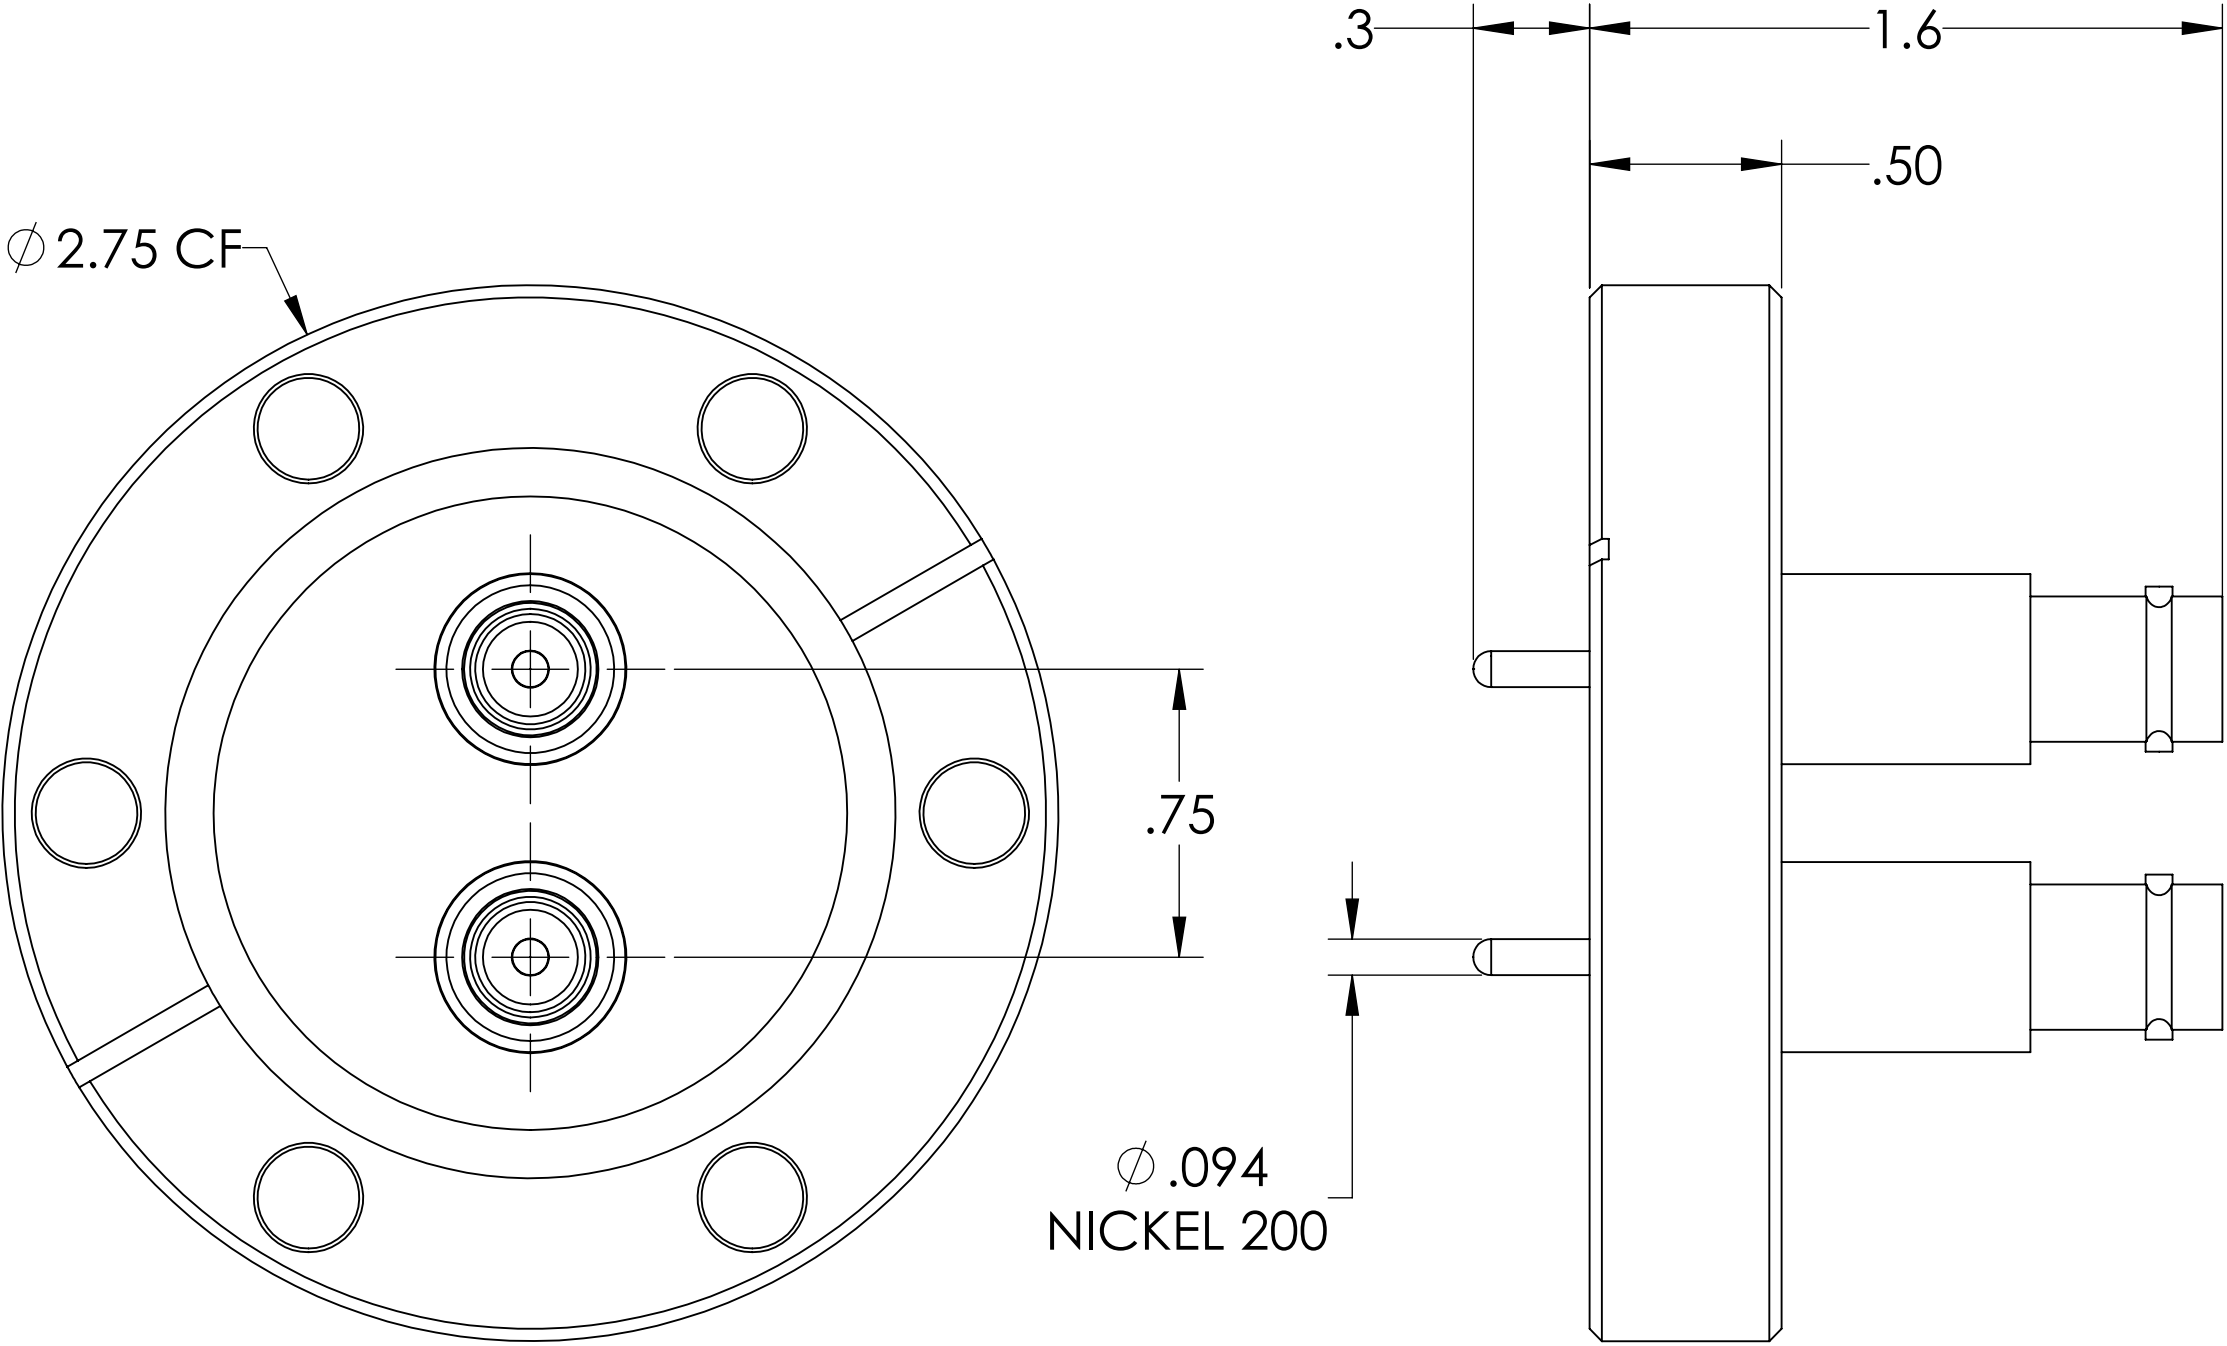

PART #	AIRSIDE CONNECTOR INCLUDED
A0332-1-CF	YES
A0332-2-CF	NO

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 5000 VOLTS DC
 - 3. CURRENT: 5 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 2 Pins, Grounded Shield, 2.75" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°		CHECKED	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		THIRD ANGLE:			
MATERIAL		APPLICATION			
		NEXT ASSY			
		USED ON			
FINISH		SURFACE FINISH: 63/ OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
		TITLE: SHV-5 COAXIAL FEEDTHROUGH, 2 PINS, GROUNDED SHIELD, 2.75" CONFLAT FLANGE			
		DOWNLOADED FROM MPFPI.COM			
		DWG. NO. A0332			
		REV			
		Thursday, October 4, 2018 9:02:26 AM			