



MPF PRODUCTS INC.

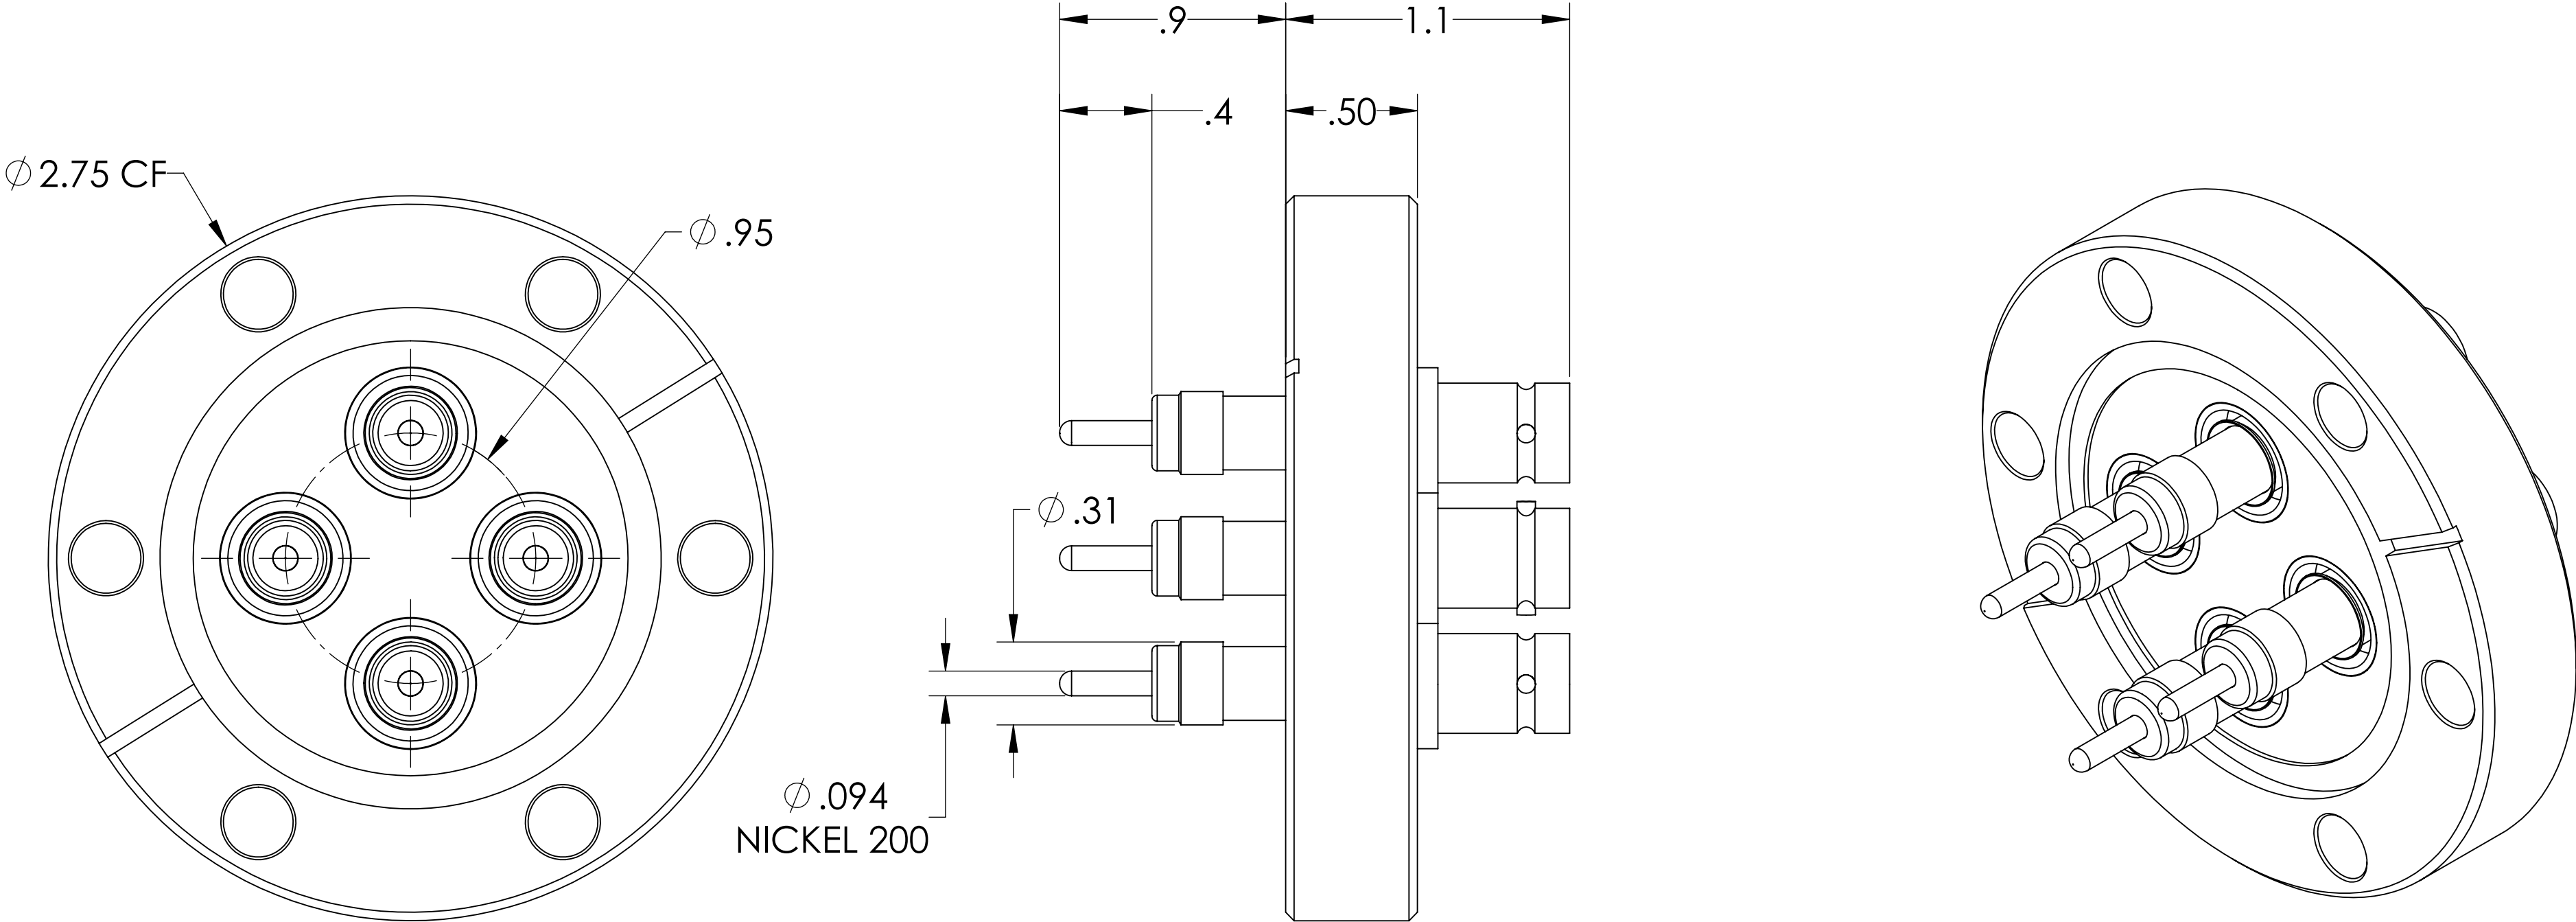

PART #	AIRSIDE CONNECTOR INCLUDED
A0339-1-CF	YES
A0339-2-CF	NO

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 5000 VOLTS DC
 - 3. CURRENT: 5 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 4 Pins, Grounded Shield, Exposed Insulator, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	WJ	DATE	9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED		DATE	9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	DATE	9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		MPF PRODUCTS INC.	
MATERIAL		APPLICATION		TITLE:	
		NEXT ASSY		USED ON	
		SURFACE FINISH:		DOWNLOADED FROM MPFPI.COM	
		UNLESS OTHERWISE SPECIFIED:		DWG. NO.	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				A0339	
				Thursday, October 4, 2018 9:41:40 AM	