


## MPF PRODUCTS INC.

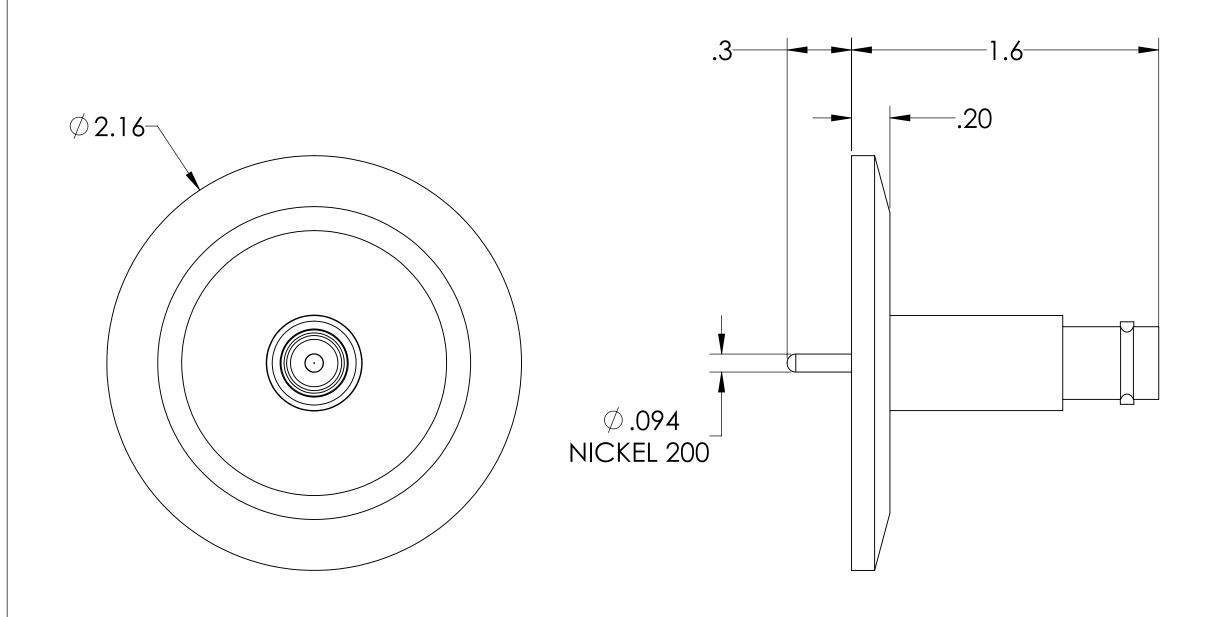

AIRSIDE CONNECTOR INCLUDED		
YES		
NO		
_		

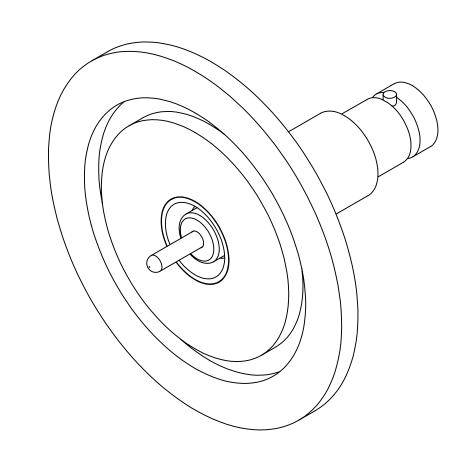



## NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 5000 VOLTS DC

3. CURRENT: 5 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Grounded Shield, 2.16" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	AADE	DDODLICTCI	NIC
TOLERANCES:	DRAWN	WJ	9/11/2015	MPF	PRODUCTS I	NC.
ANICHH AD AAA CH . 1/0°	CHECKED		9/11/2015	TITLE:		
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015		SHV-5 COAXIAL	
THREE PLACE DECIMAL ± .015	THIRD ANGLE:				<b>.</b> 1	
MATERIAL	APPLICATION NEXT ASSY USED ON			DTHROUGH, 1 PII INDED SHIELD, 2. QF/KF	,	
				Qi / Ki		
				DOWNLO	ADED FROM MPFPI.CC	M
FINISH	SURFACE FINIS	SH:	OR BETTER	DWG. NO		REV
PLATING	UNLESS OTHERWISE SPECIFIED:			A0341		
FLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Thursday, January 17, 2019 3:31:40 PM		PM