



MPF PRODUCTS INC.

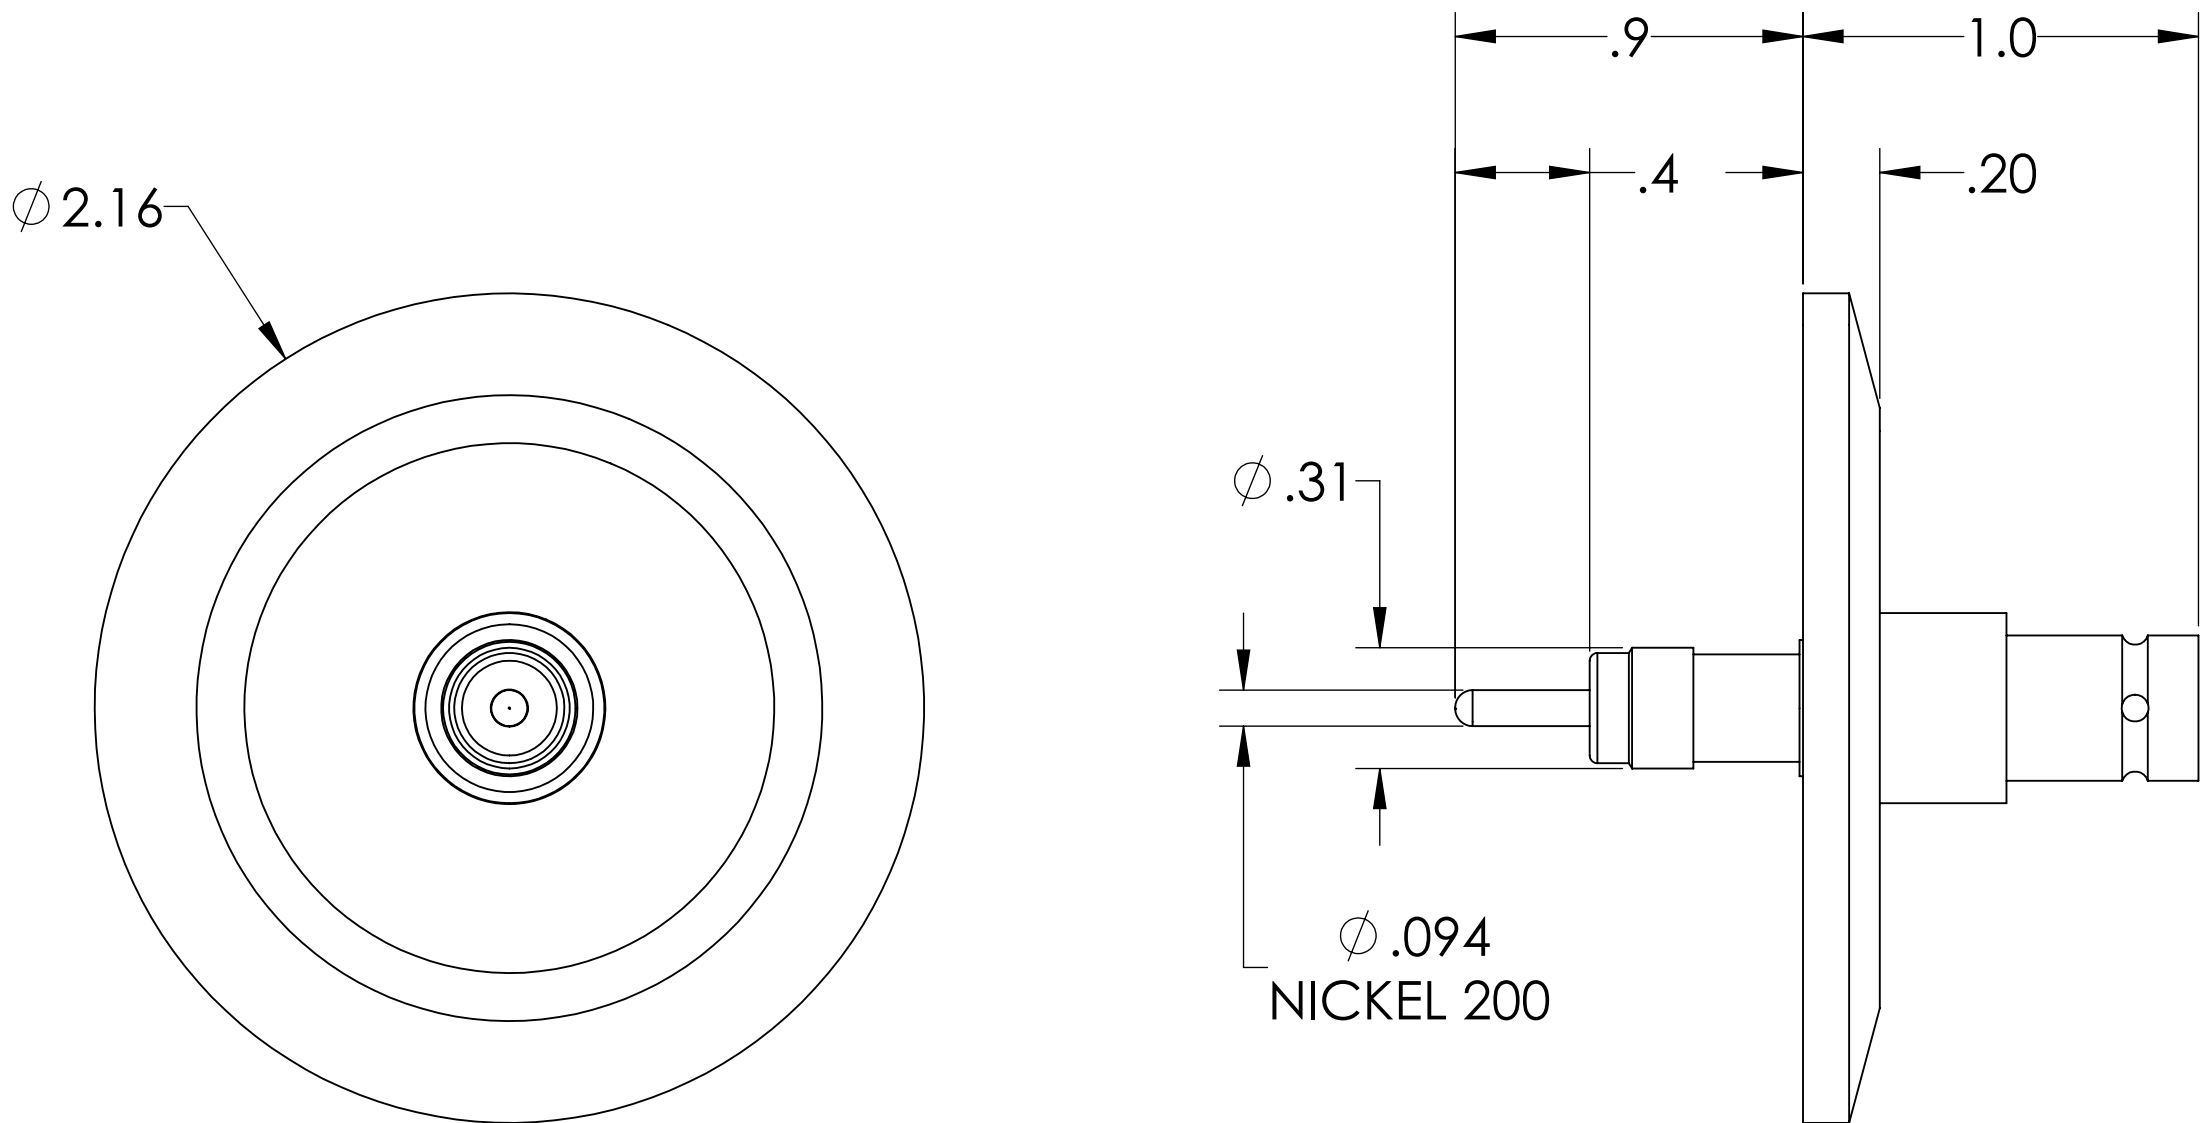

PART #	AIRSIDE CONNECTOR INCLUDED
A0346-1-QF	YES
A0346-2-QF	NO

- NOTE:
1. SHIELD: GROUNDED
  2. VOLTAGE: 5000 VOLTS DC
  3. CURRENT: 5 AMPS
  4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
  5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Grounded Shield, Exposed Insulator, 2.16" QF/KF, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	WJ	DATE	9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED		DATE	9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	DATE	9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		TITLE:	
MATERIAL		APPLICATION		SHV-5 COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, EXPOSED, 2.16" QF/KF	
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		DWG. NO.	
PLATING		UNLESS OTHERWISE SPECIFIED:		A0346	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				Thursday, January 17, 2019 3:29:01 PM	