



MPF PRODUCTS INC.


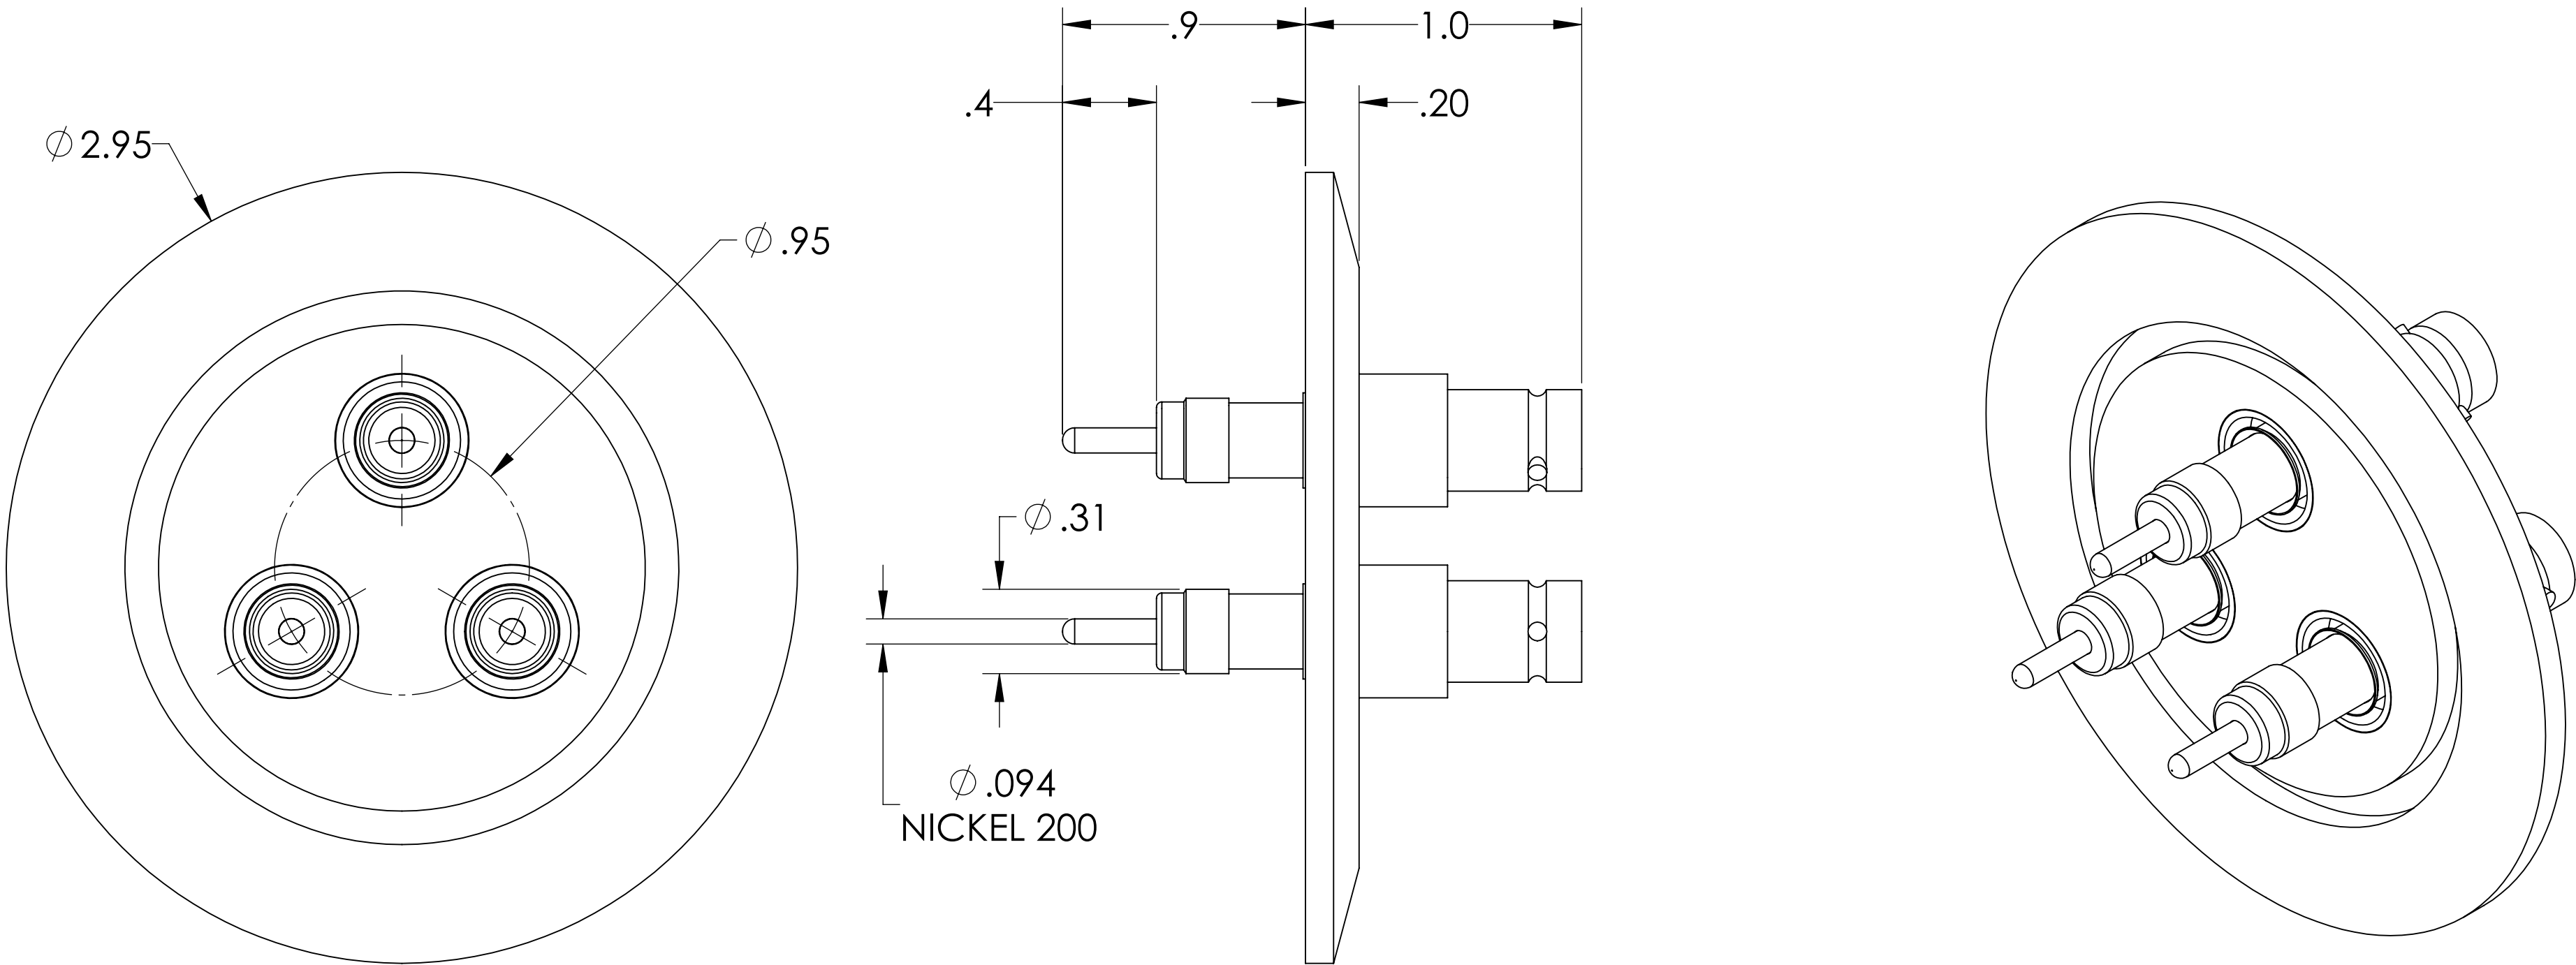


PART #	AIRSIDE CONNECTOR INCLUDED
A0348-1-QF	YES
A0348-2-QF	NO

- NOTE:
- 1. SHIELD: GROUNDED
  - 2. VOLTAGE: 5000 VOLTS DC
  - 3. CURRENT: 5 AMPS
  - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
  - 5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 3 Pins, Grounded Shield, Exposed Insulator, 2.95" QF/KF, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL     ± .030 THREE PLACE DECIMAL   ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			TITLE:  SHV-5 COAXIAL FEEDTHROUGH, 3 PINS, GROUNDED SHIELD, EXPOSED, 2.95" QF/KF
					
		APPLICATION			
		NEXT ASSY                      USED ON			
FINISH		SURFACE FINISH:  OR BETTER			DOWNLOADED FROM MPFPI.COM
		UNLESS OTHERWISE SPECIFIED:			
PLATING		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			DWG. NO.                      A0348                      REV
					Thursday, January 17, 2019 3:26:22 PM