

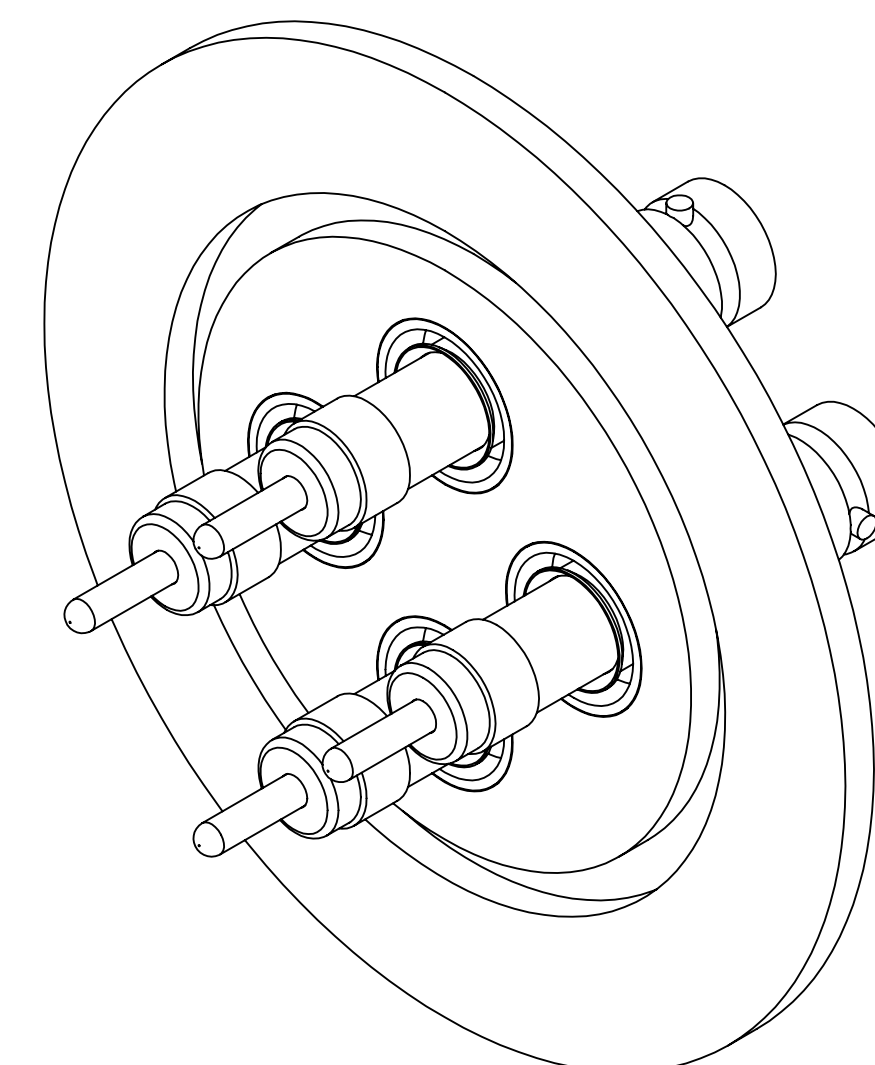
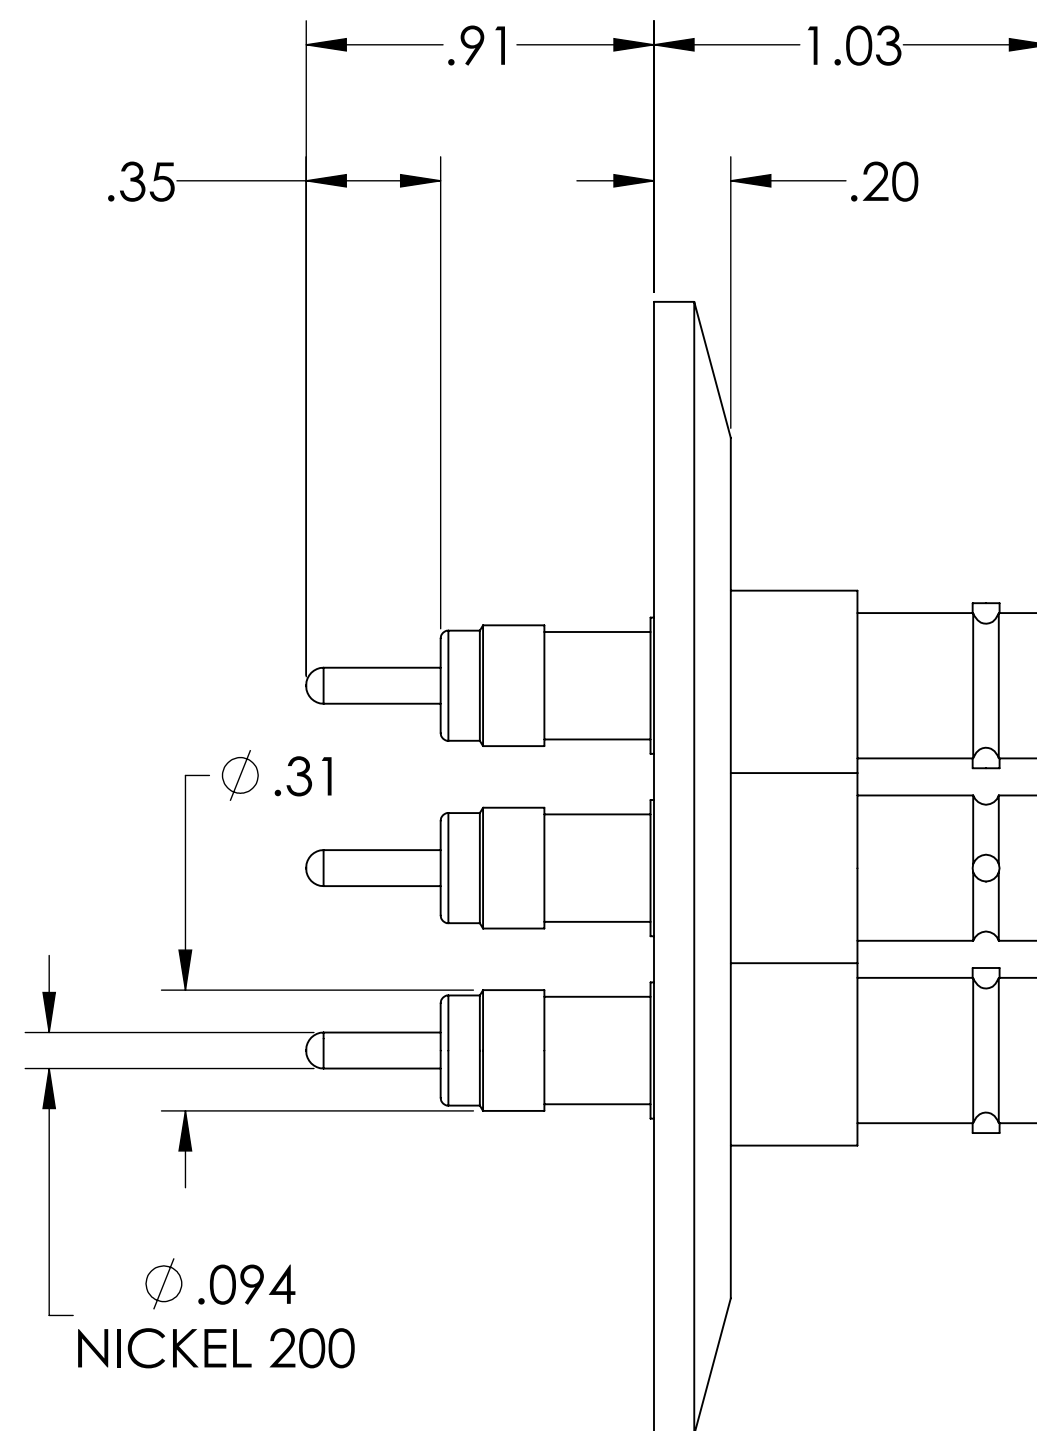


# MPF PRODUCTS INC.

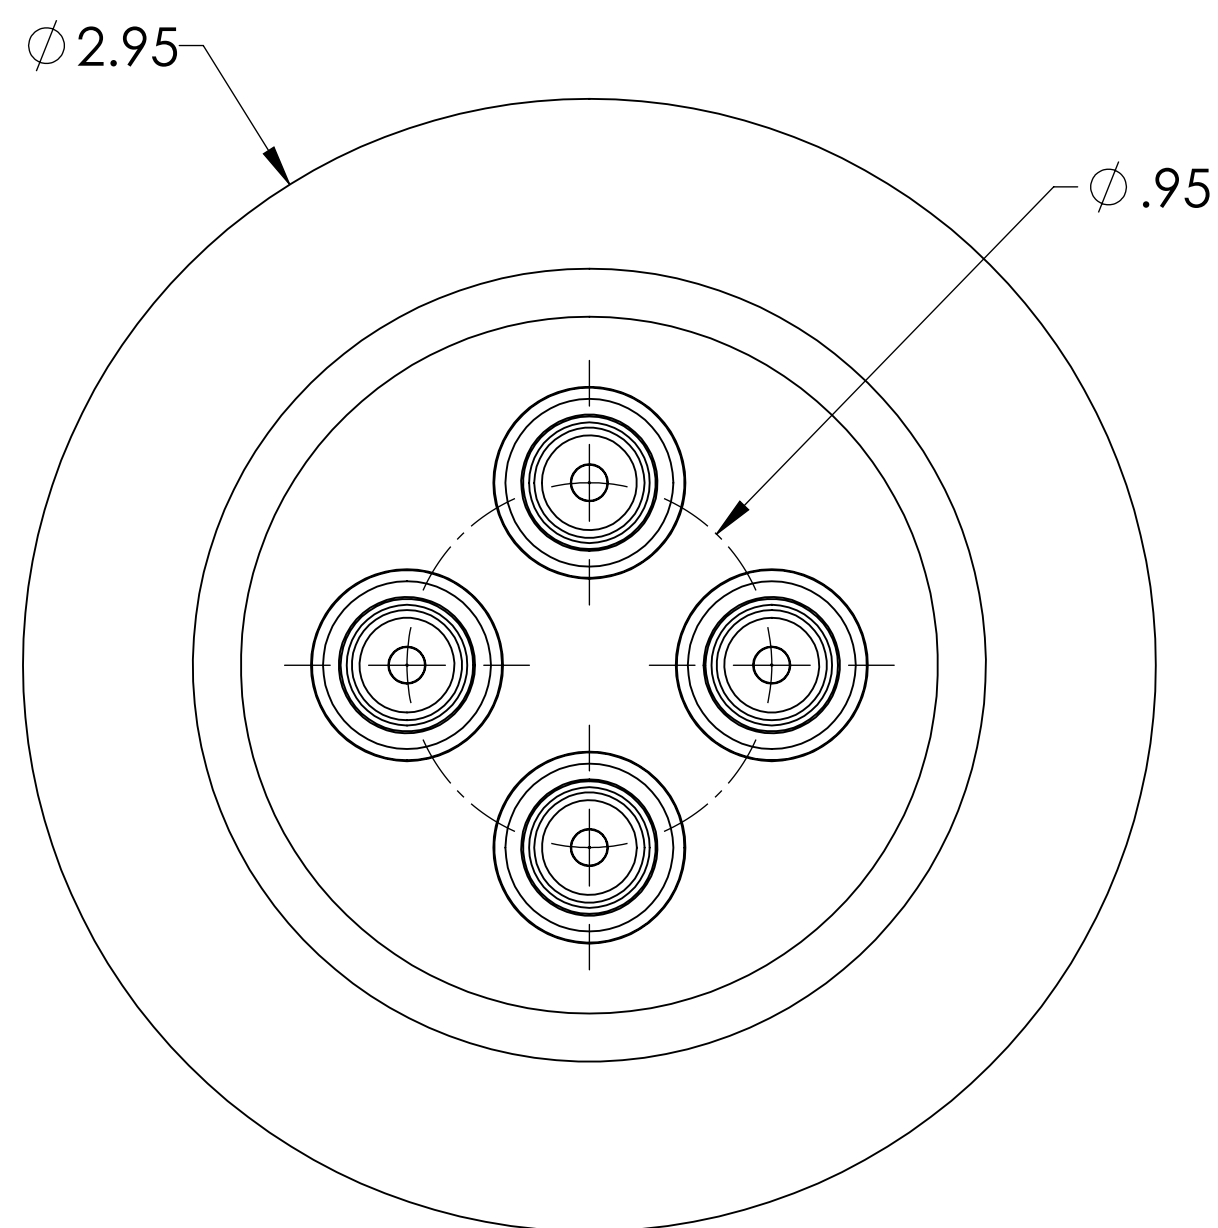

PART #	AIRSIDE CONNECTOR INCLUDED
A0349-1-QF	YES
A0349-2-QF	NO

**NOTE:**

1. SHIELD: GROUNDED
2. VOLTAGE: 5000 VOLTS DC
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 4 Pins, Grounded Shield, Exposed Insulator, 2.95" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION		
PLATING	SURFACE FINISH:	63 OR BETTER	
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	TITLE:	SHV-5 COAXIAL FEEDTHROUGH, 4 PINS, GROUNDED SHIELD, EXPOSED, 2.95" QF/KF	
	DOWNLOADED FROM MPFPI.COM		
	DWG. NO.	A0349	REV
	Thursday, January 17, 2019 3:25:45 PM		