


MPF PRODUCTS INC




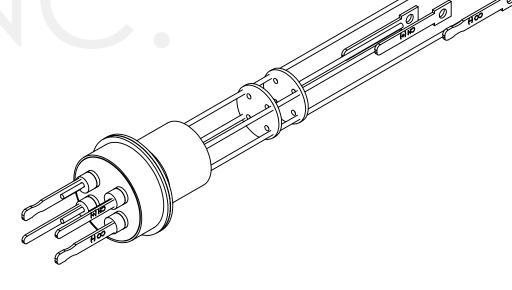



T/C TYPE
J
K
С
Е

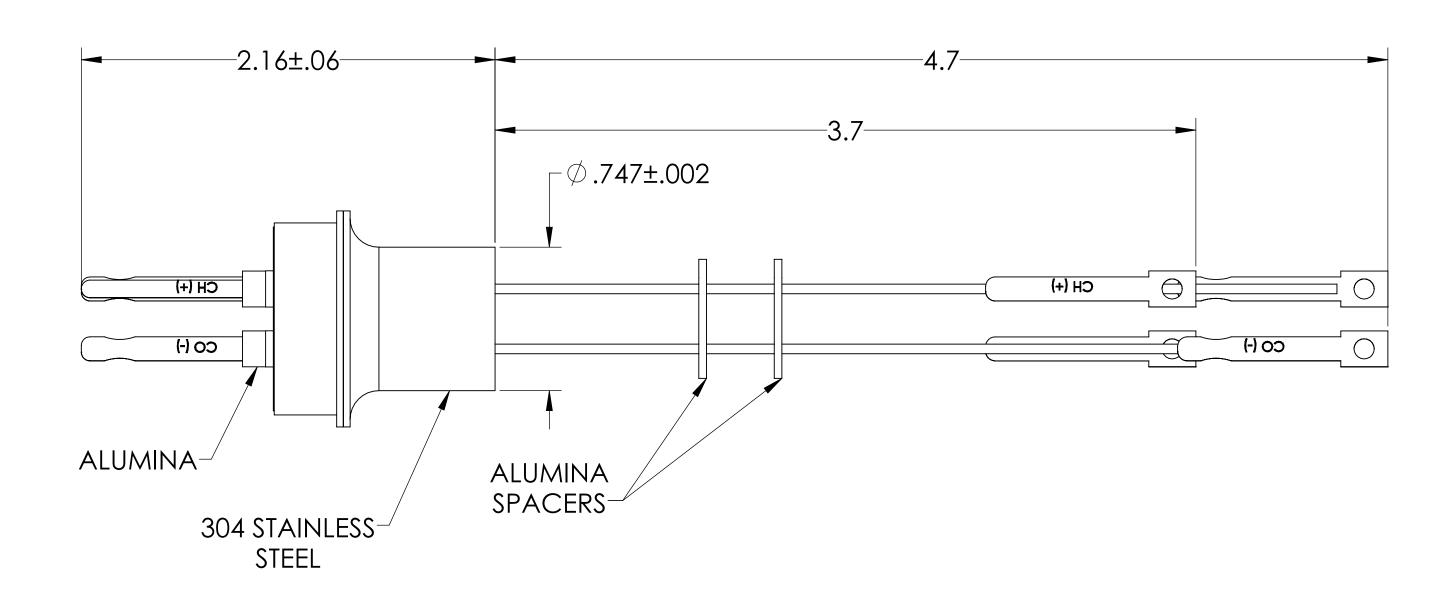



SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 2 Pairs, Miniature Connector, 0.75" Stainless Steel Weld Adapter

UNLESS OTHERWISE SPECIFIED:	QUOTATION #						
DIVATABLE A DE INTINIONES			İ	N/A			
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	١,	MPF PRODUCTS INC		
	DRAWN	WJ	9/11/2015	l IV			
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITL	_E:		
	ENG APPR.	WJ	9/11/2015				
	THIRD AND	E:] ₋		MIDC	
		\ _		l	THERMOCOUPLE, 2 F		
MATERIAL	(+)++			CONNECTOR, .74	7"		
	APPLICATION				WELD ADAPTER		
					WELD ADAPTE	`	
	NEXT ASSY		USED ON]			
				DOV	WNLOADED FROM MPFPI.C	COM	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV	
DIATING	UNLESS OTHERWISE SPECIFIED:			-	A0406		
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			F	Friday, February 8, 2019 8:51:15 A	M	
E WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1							