


## MPF PRODUCTS INC




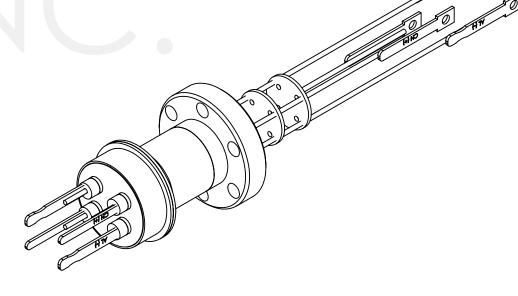

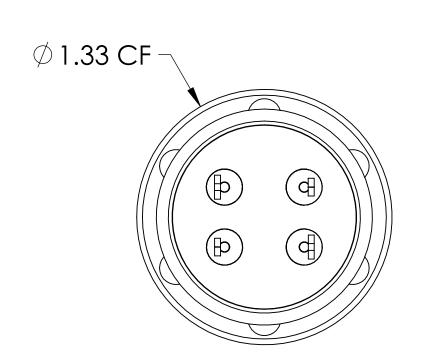

T/C TYPE
J
K
С
E

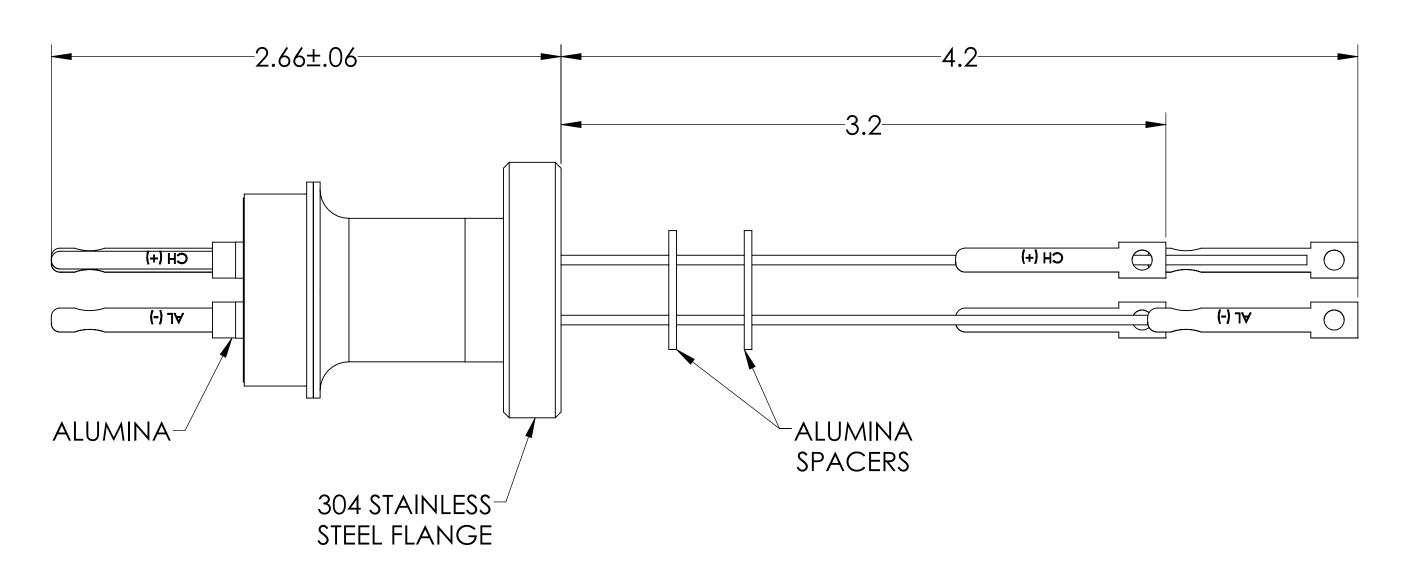



SHEET 1 OF 1

## SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 2 Pairs, Miniature Connector, 1.33" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #						
			1	N/A			
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	AADE DDODLIGTS INC		10	
	DRAWN	WJ	9/11/2015	MPF PRODUCTS IN	VC.		
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITL	E:		
	ENG APPR.	WJ	9/11/2015				
	THIRD AND	SLE:					
===		\ _		Т	HERMOCOUPLE, 2 PA	IRS.	
MATERIAL	APPLICATION				CONNECTOR, 133CI	•	
					connection, 199ci		
	NEXT ASSY USED ON						
				DOV	VNLOADED FROM MPFPI.CO	М	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV	
DLATINIC	UNLESS OTHERWISE SPECIFIED:			A0407			
PLATING	ALL DIAMETERS REMOVE ALL BL		TRIC WITHIN .005. SHARP EDGES	F	riday, February 8, 2019 8:50:47 AM		