
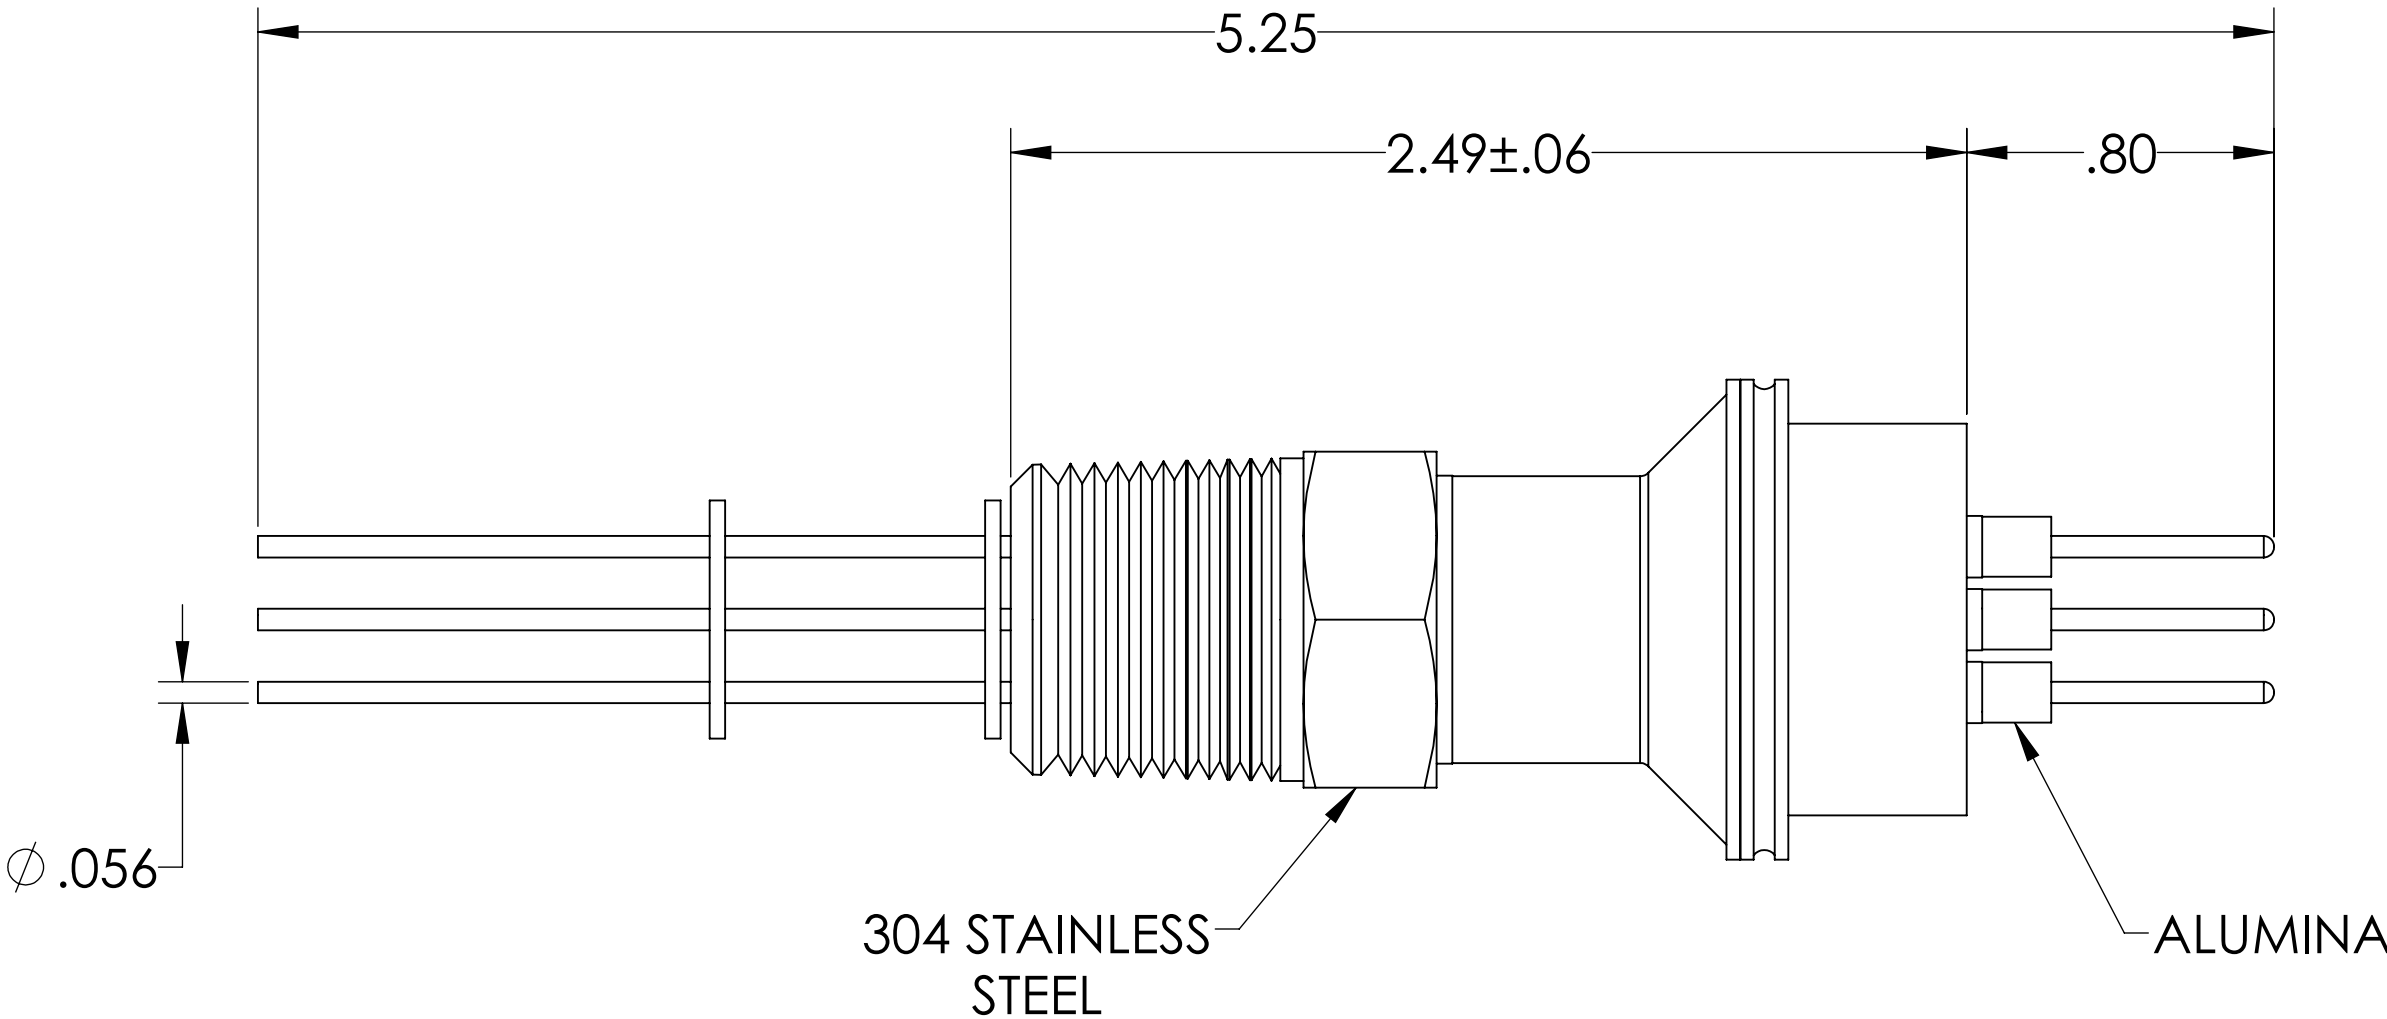
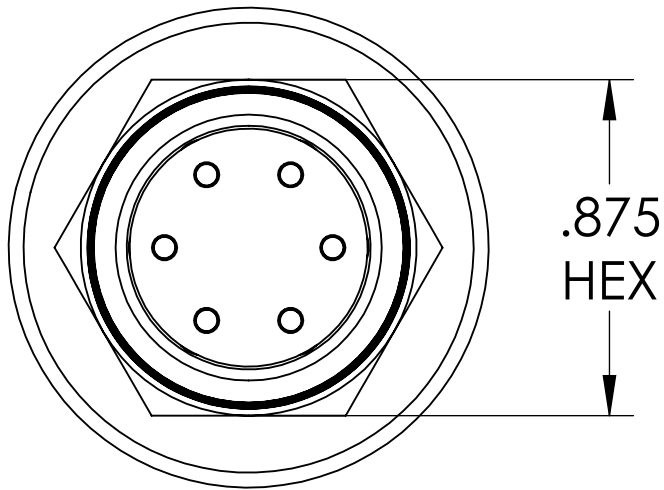
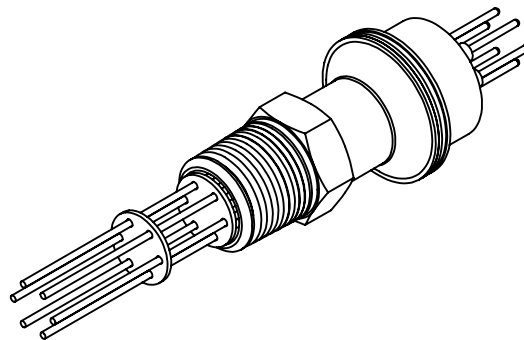


MPF PRODUCTS INC.



- NOTE:
- 1. VOLTAGE: 2000 VOLTS DC
 - 2. CURRENT: 10 AMPS
 - 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 6 Pins, 0.056" Alumel Conductors, 1/2" NPT Fitting, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: POWER FEEDTHROUGH, 2000 VOLTS, 6 PINS, 1/2" NPT FITTING
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			DOWNLOADED FROM MPFPI.COM
					
		APPLICATION			
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		DWG. NO.	
		✓ ₆₃ OR BETTER		REV	
PLATING		UNLESS OTHERWISE SPECIFIED:		A0424-8-NPT	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
				Thursday, December 13, 2018 10:46:10 AM	