
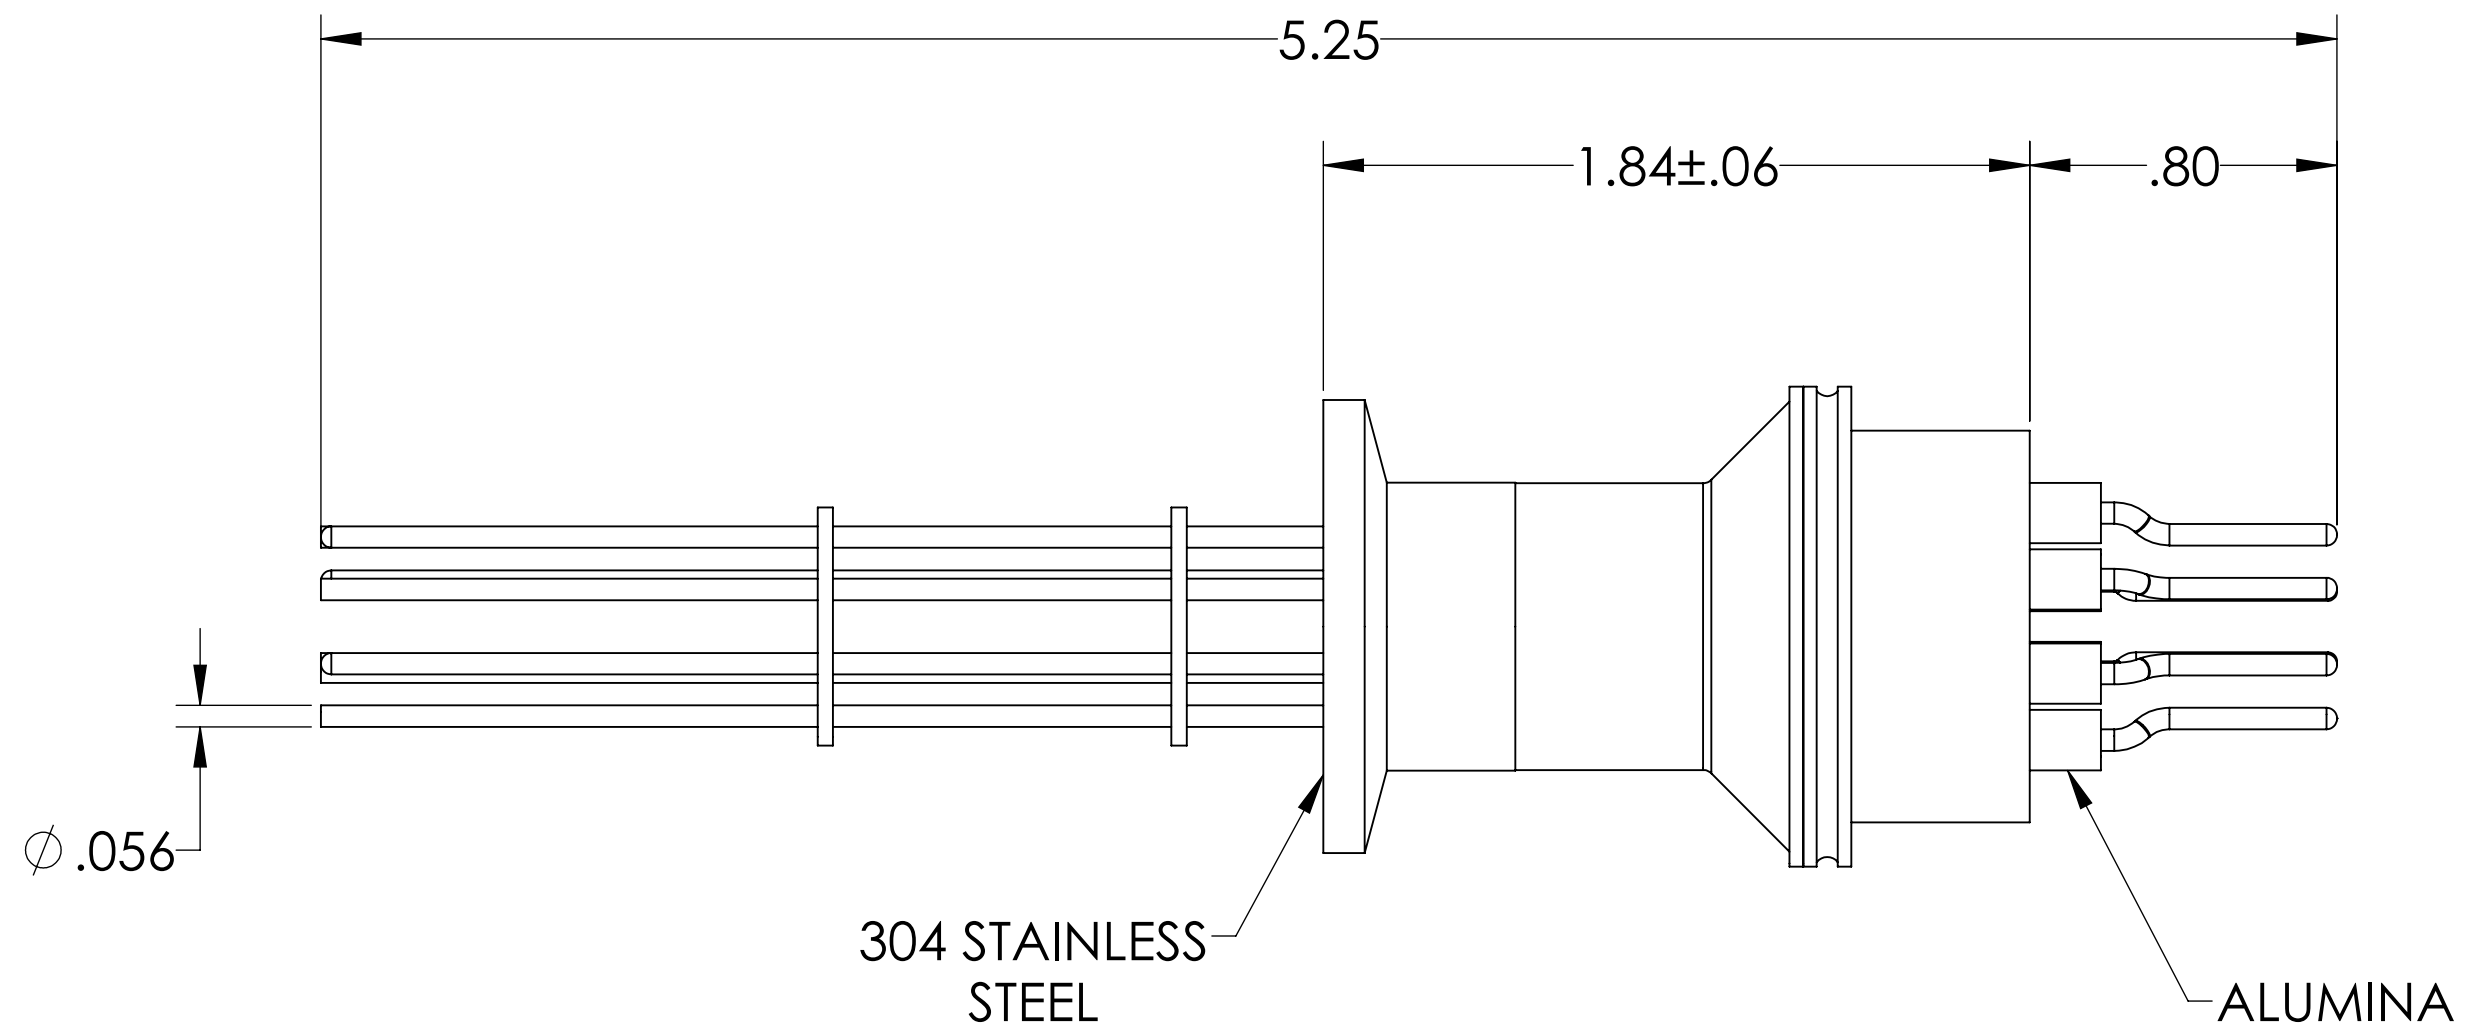
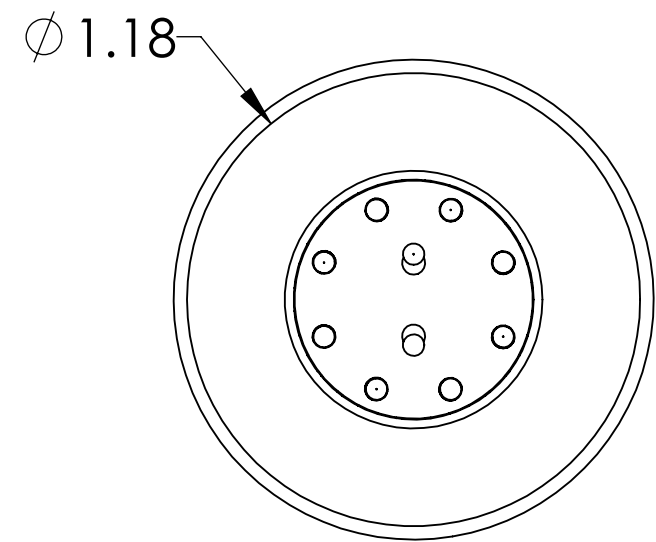


MPF PRODUCTS INC.

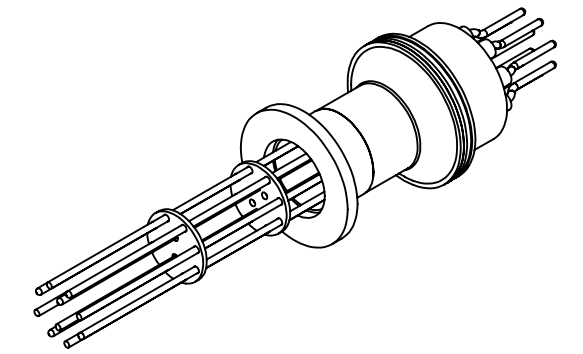

- NOTE:**
1. VOLTAGE: 2000 VOLTS DC
 2. CURRENT: 10 AMPS
 3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 10 Pins, 0.056" Alumel Conductors, 1.18" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ 9/11/2015		
MATERIAL		THIRD ANGLE:		POWER FEEDTHROUGH, 2000 VOLTS, 10 PINS 1.18" QF/KF	
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH: 63/ OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A0425-12-QF	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV.	
		Thursday, December 13, 2018 10:50:02 AM			