
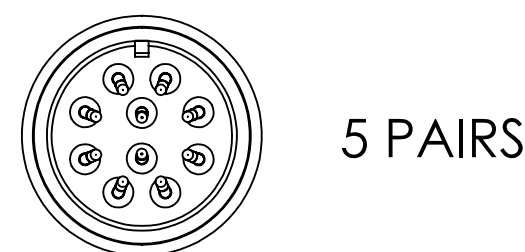
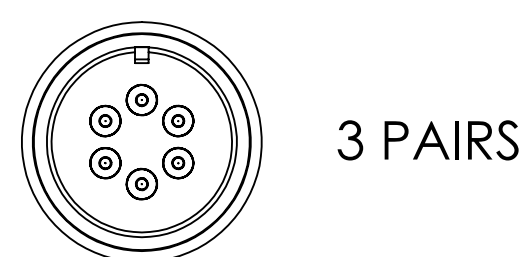
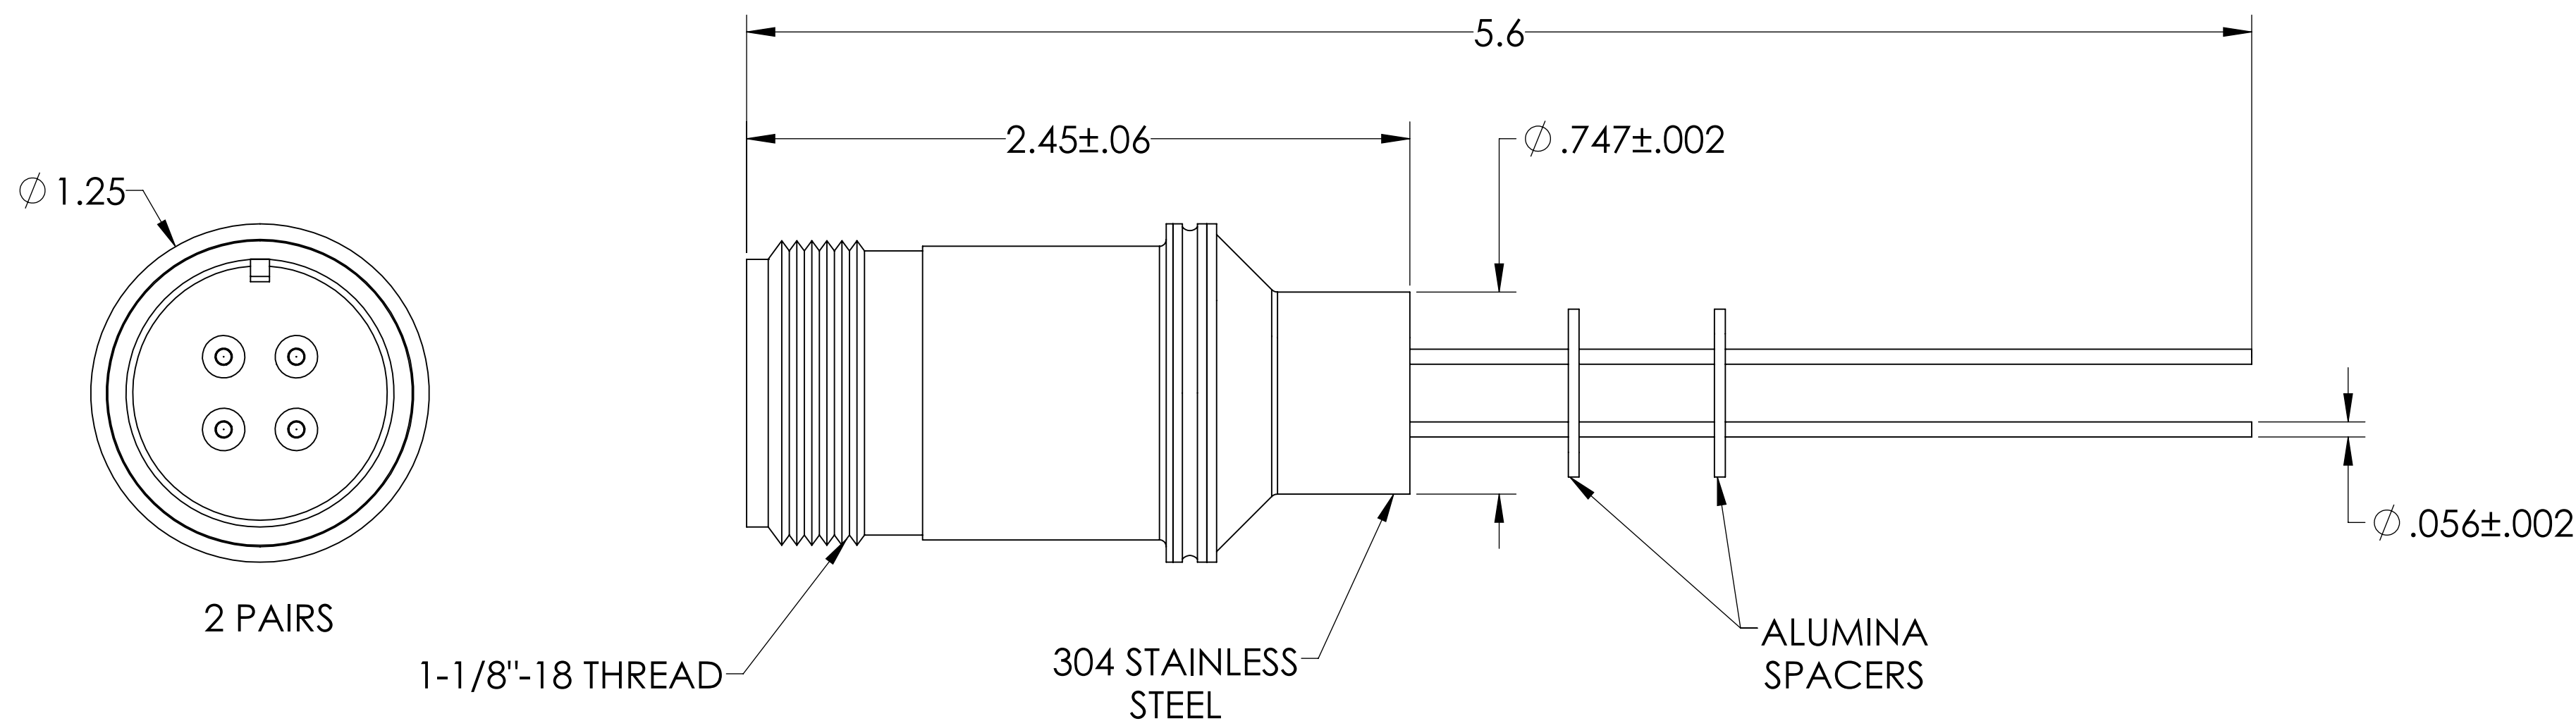


# MPF PRODUCTS INC.

NOTES:

- \* TYPE K:  
ALUMEL CONDUCTORS HAVE A NEGATIVE POLARITY ( MAGNETIC ) AND THE VACUUM SIDE ENDS ARE FLAT.  
CHROMEL CONDUCTORS HAVE A POSITIVE POLARITY ( NON - MAGNETIC ) AND THE VACUUM SIDE ENDS HAVE A RADIUS.
- \* TYPE J:  
CONSTANTAN CONDUCTORS HAVE A NEGATIVE POLARITY ( NON - MAGNETIC ) AND THE VACUUM SIDE ENDS ARE FLAT.  
IRON CONDUCTORS HAVE A POSITIVE POLARITY ( MAGNETIC ) AND THE VACUUM SIDE ENDS HAVE A RADIUS.
- \* TYPE E:  
CONSTANTAN CONDUCTORS HAVE A NEGATIVE POLARITY ( NON - MAGNETIC ) AND THE VACUUM SIDE ENDS ARE FLAT.  
CHROMEL CONDUCTORS HAVE A POSITIVE POLARITY ( NON - MAGNETIC ) AND THE VACUUM SIDE ENDS HAVE A RADIUS.



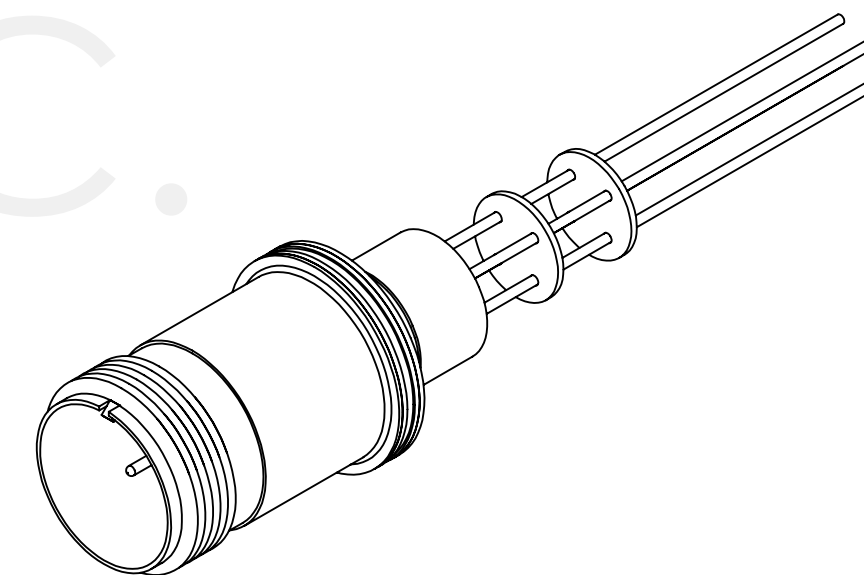


PART #	T/C TYPE	# OF PAIRS
A0429-1-W	K	2
A0429-2-W	J	2
A0429-3-W	E	2
A0429-5-W	K	3
A0429-6-W	J	3
A0429-7-W	E	3
A0429-9-W	K	5
A0429-10-W	J	5
A0429-11-W	E	5

2 PAIRS CONNECTOR

3 PAIRS CONNECTOR

5 PAIRS CONNECTOR

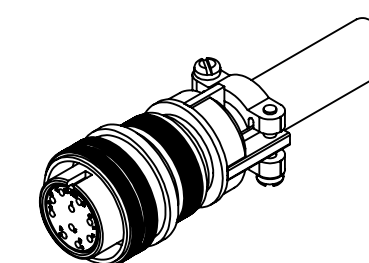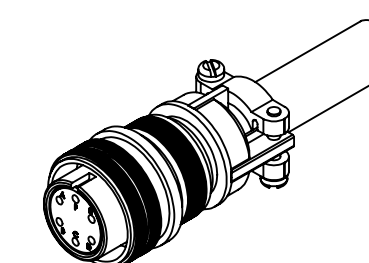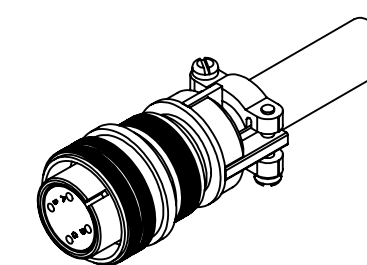

SPECIFICATIONS:

1. TEMPERATURE RATING: -100 TO 450°C
2. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Thermocouple Feedthrough, w/Air-side Connector, 0.75" Stainless Steel Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		THERMOCOUPLE, MS CONNECTOR, .747" WELD ADAPTER	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH: 63/ OR BETTER		UNLESS OTHERWISE SPECIFIED:		DOWNLOADED FROM MPFPI.COM	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO.		REV	
		A0429		Friday, February 8, 2019 8:44:01 AM	