
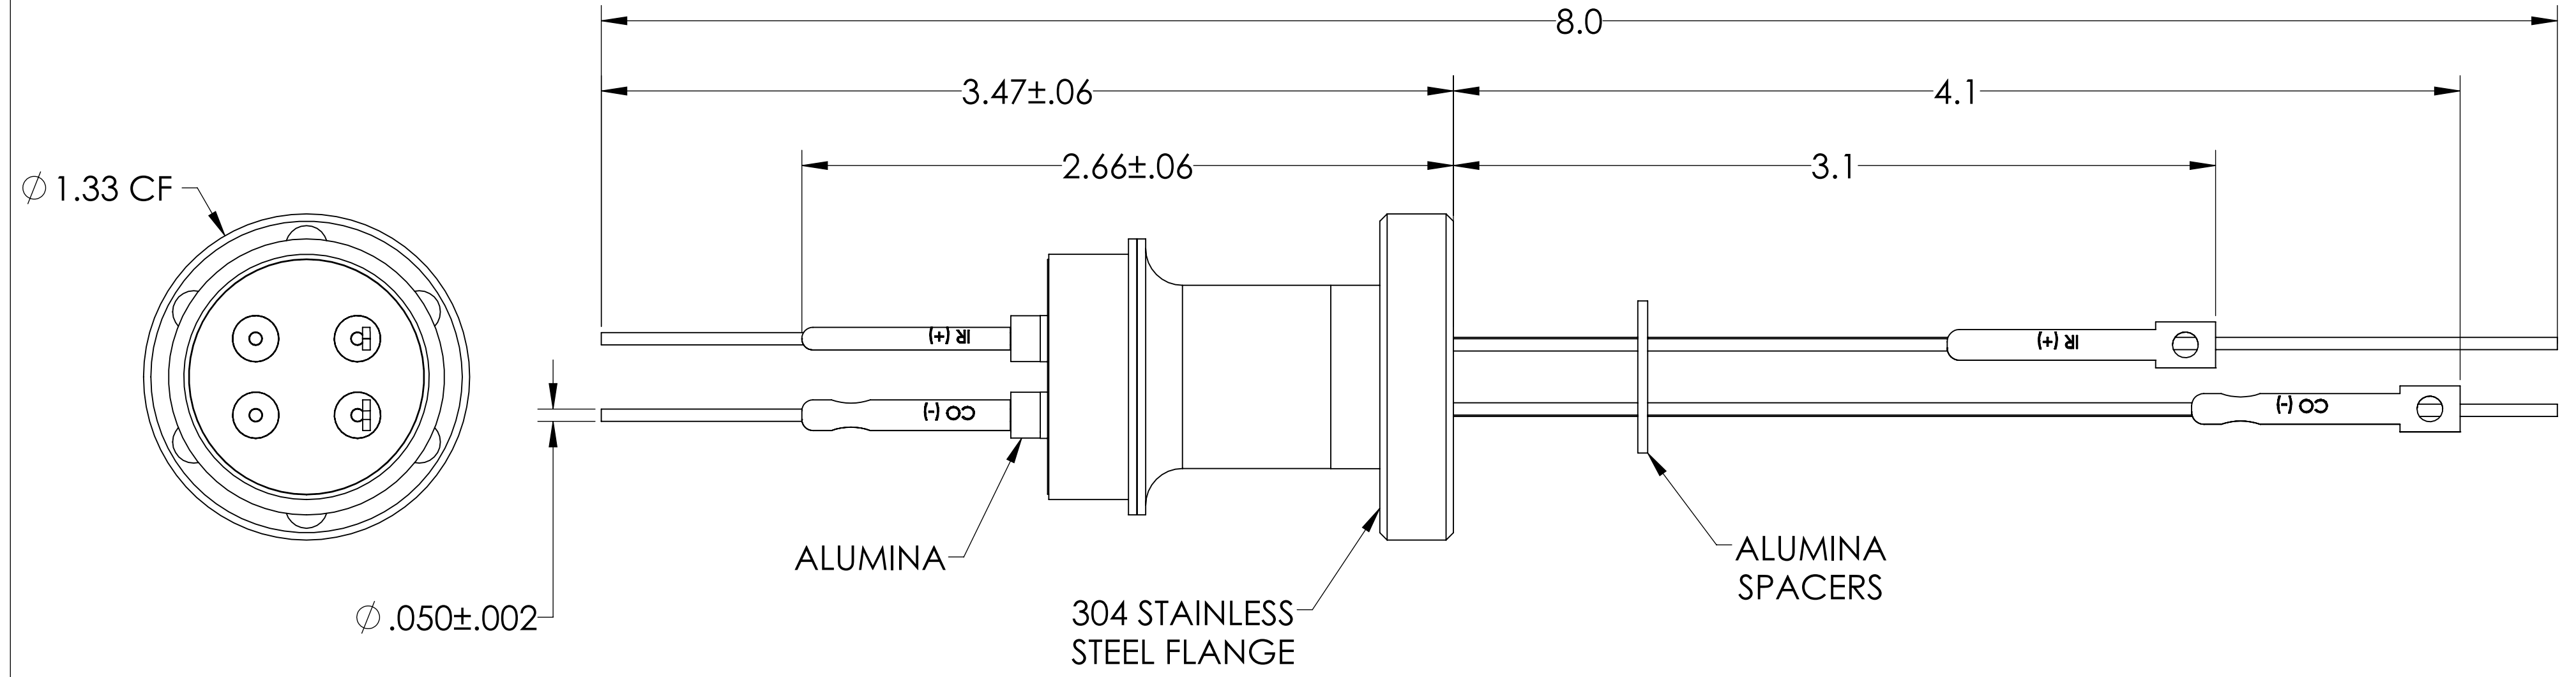


MPF PRODUCTS INC.

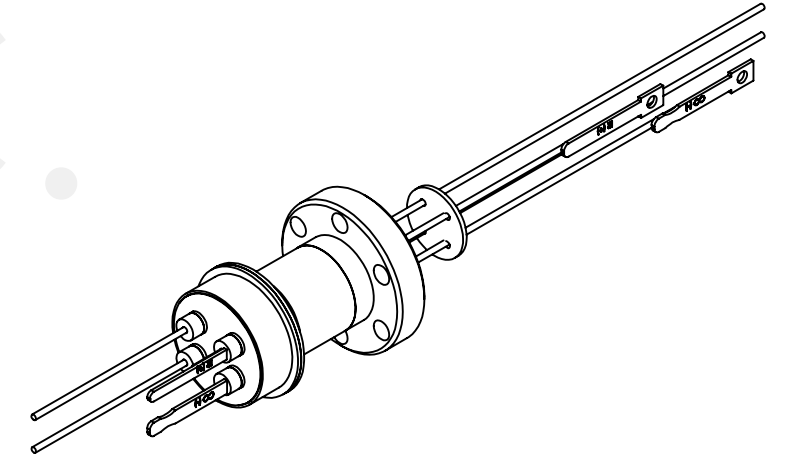


PART #	T/C TYPE	POWER LEADS	CURRENT RATINGS (POWER PINS ONLY)
A0436-1-CF	K	COPPER	15 AMPS (PER PIN)
A0436-2-CF	K	NICKEL	5 AMPS (PER PIN)
A0436-3-CF	J	COPPER	15 AMPS (PER PIN)
A0436-4-CF	J	NICKEL	5 AMPS (PER PIN)
A0436-5-CF	C	COPPER	15 AMPS (PER PIN)
A0436-6-CF	C	NICKEL	5 AMPS (PER PIN)
A0436-7-CF	E	COPPER	15 AMPS (PER PIN)
A0436-8-CF	E	NICKEL	5 AMPS (PER PIN)

SPECIFICATIONS:

1. VOLTAGE: 1000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 1 Pair , w/ Miniature TC Connector, 1000 Volts, 2 Pins, 1.33" Conflat Flange

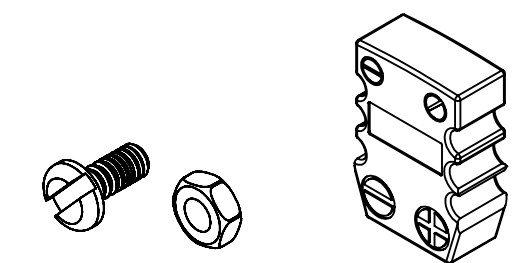

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°		WJ	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		CHECKED		9/11/2015	
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:		TITLE:	
				THERMOCOUPLE-POWER, 1 PAIR, 1000V, 2 PINS, 133CF	
FINISH		APPLICATION		NEXT ASSY	
PLATING		SURFACE FINISH: 63 OR BETTER		USED ON	
		UNLESS OTHERWISE SPECIFIED:		DOWNLOADED FROM MPFPI.COM	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO. A0436	
				REV	
				Friday, February 8, 2019 8:41:44 AM	