



MPF PRODUCTS INC




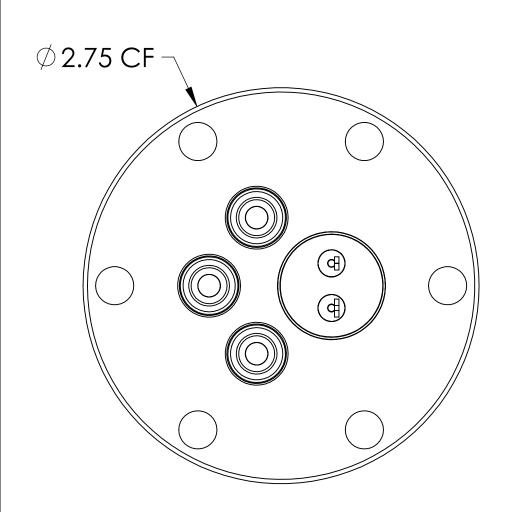

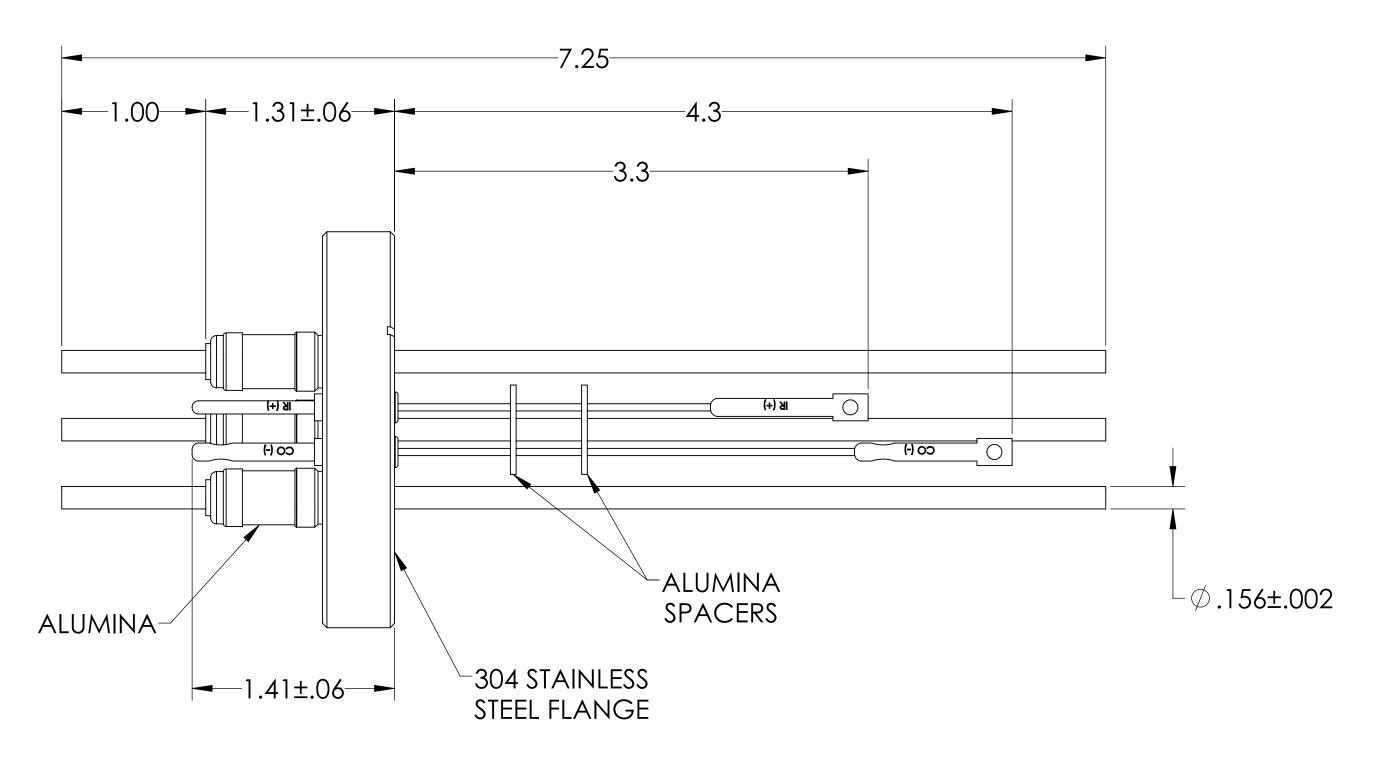

PART #	T/C TYPE
A0453-1-CF	J
A0453-2-CF	K
A0453-3-CF	С
A0453-4-CF	Е





SHEET 1 OF 1

SPECIFICATIONS:

1. VOLTAGE: 5000 VOLTS DC

2. CURRENT: 60 AMPS

3. TEMPERATURE RATING: -100 TO 450°C 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 1 Pair , w/ Miniature TC Connector, 5000 Volts, 60 Amps, 3 Pins, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #				
				N/A	
IMENSIONS ARE IN INCHES		NAME	DATE	ADE DOODLIGTS IN	
TOLERANCES:	DRAWN	WJ	9/11/2015	MPF PRODUCTS IN	IC.
NGULAR: MACH±1/2° WO PLACE DECIMAL ± .030	CHECKED		9/11/2015	TITLE:	
	ENG APPR.	WJ	9/11/2015		
	THIRD AND	SLE:		THERMOCOLIDLE DOWER	
				THERMOCOUPLE-POWER, 1 PAIR, 5000V, 60A, 3 PINS, 275CF	
MATERIAL					
	APPLICATION				
	NEXT ASSY		USED ON		
				DOWNLOADED FROM MPFPI.COM	١
FINISH	SURFACE FINIS	SH:	OR BETTER	DWG. NO.	REV
31.1223 31.	SS OTHERWISE SPECIFIED:		A0453		
PLATING	ALL DIAMETERS REMOVE ALL BU		TRIC WITHIN .005. SHARP EDGES	Friday, February 8, 2019 8:37:31 AM	