

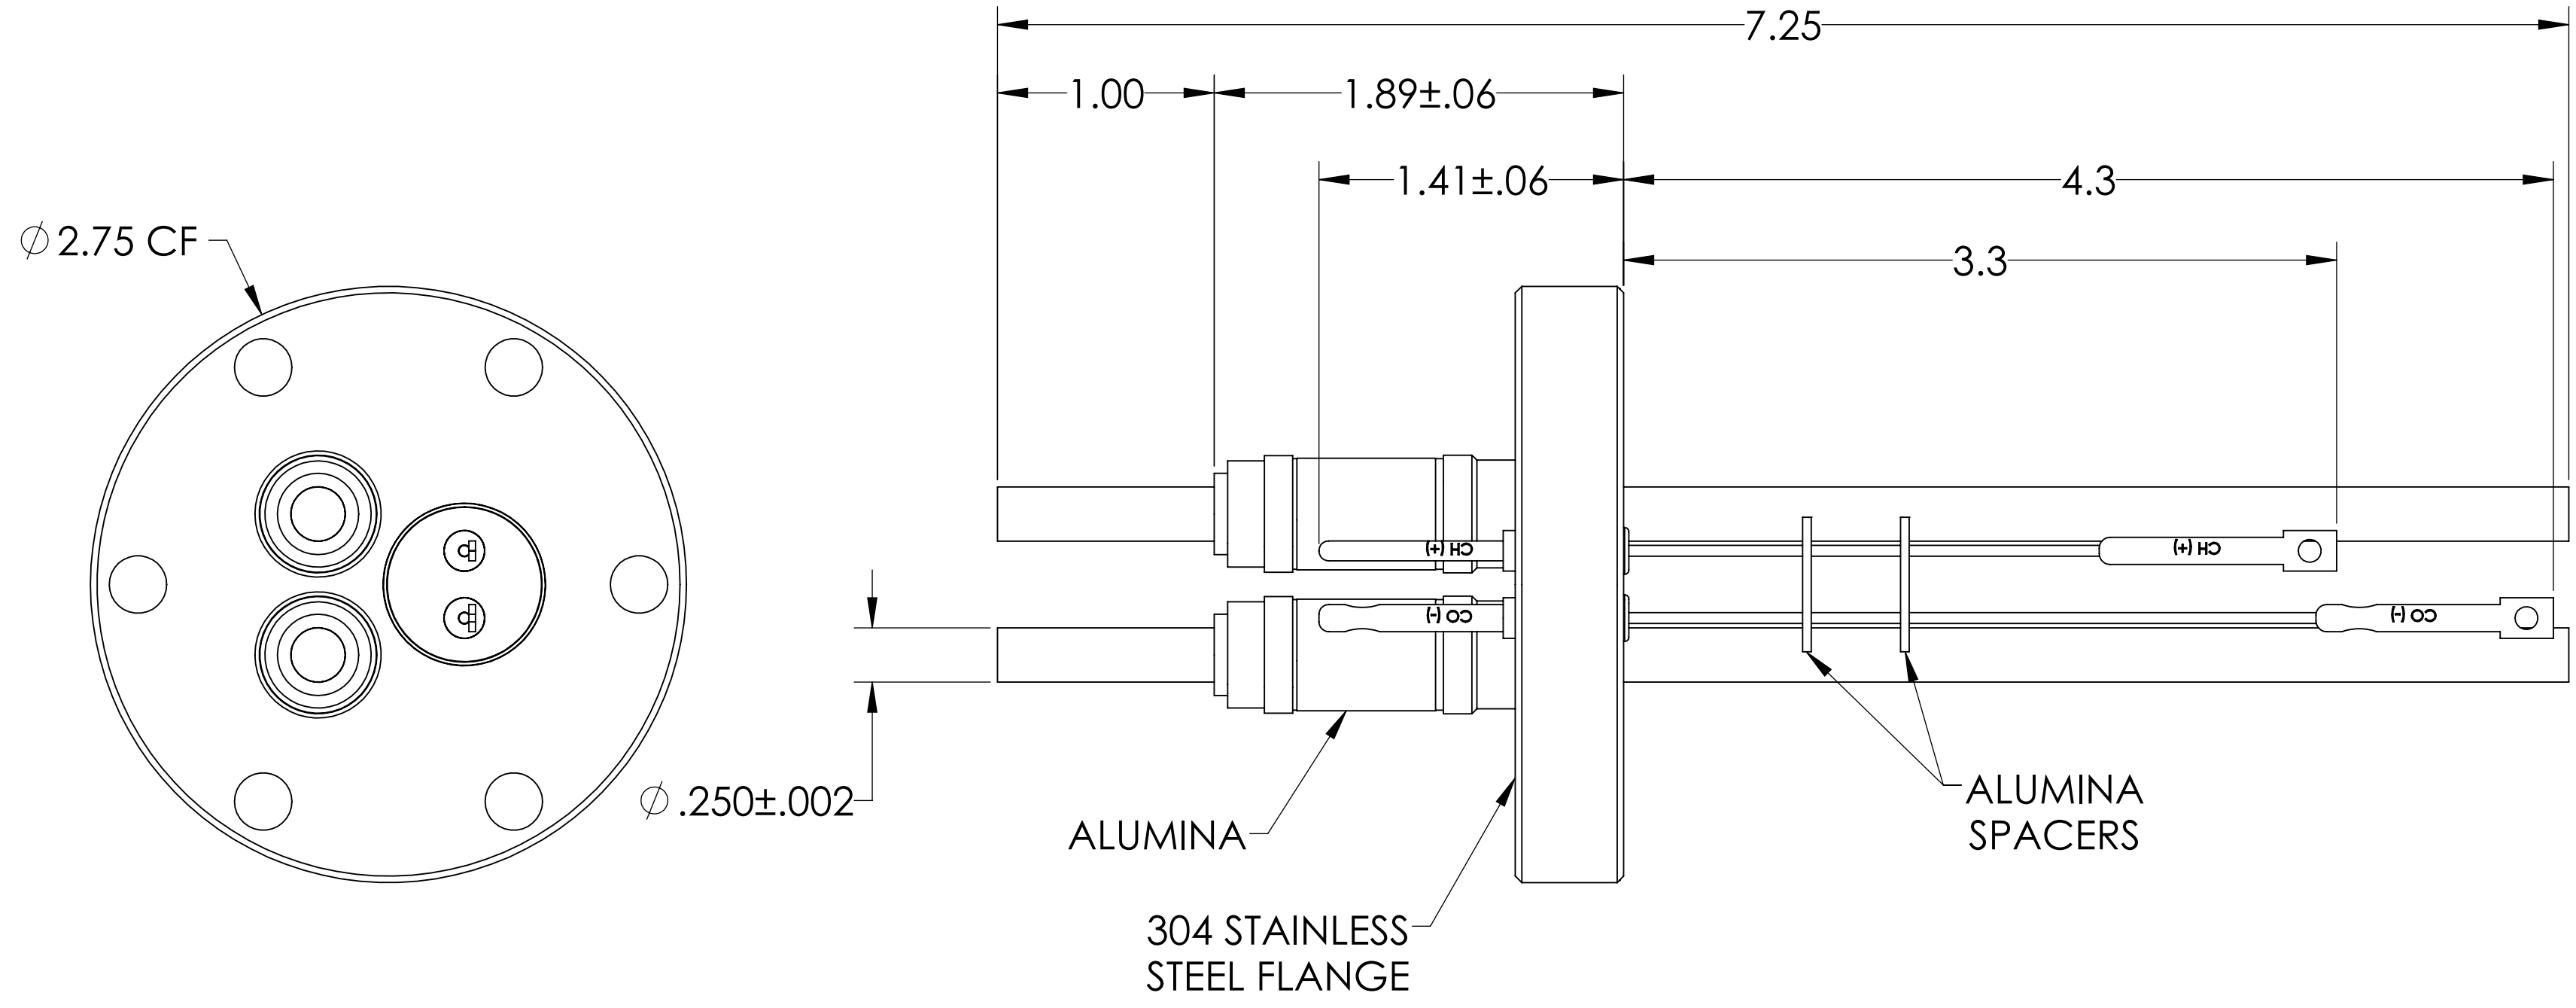


MPF PRODUCTS INC.

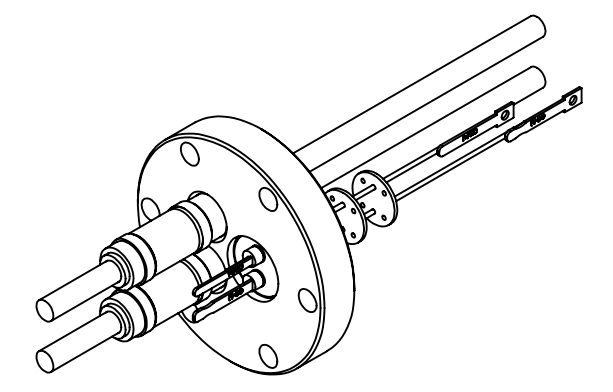

PART #	T/C TYPE
A0458-1-CF	J
A0458-2-CF	K
A0458-3-CF	C
A0458-4-CF	E

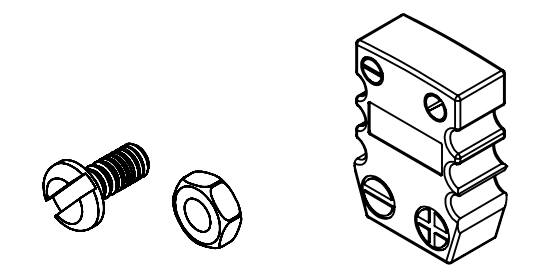

SPECIFICATIONS:

- VOLTAGE: 5000 VOLTS DC
- CURRENT: 150 AMPS
- TEMPERATURE RATING: -100 TO 450°C
- LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 1 Pair , w/ Miniature TC Connector, 5000 Volts, 150 Amps, 2 Pins, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH $\pm 1/2^\circ$		DRAWN	9/11/2015	TITLE:	
TWO PLACE DECIMAL $\pm .030$		CHECKED	9/11/2015	THERMOCOUPLE-POWER,	
THREE PLACE DECIMAL $\pm .015$		ENG APPR.	9/11/2015	1 PAIR, 5000V, 150A, 2 PINS,	
MATERIAL		THIRD ANGLE:		275CF	
FINISH		APPLICATION		DOWNLOADED FROM MPFPI.COM	
PLATING		NEXT ASSY		DWG. NO.	
SURFACE FINISH: $\sqrt{63}$ OR BETTER		USED ON		REV	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005.		A0458	
REMOVE ALL BURRS AND SHARP EDGES		Friday, February 8, 2019 8:36:56 AM			