



MPF PRODUCTS INC

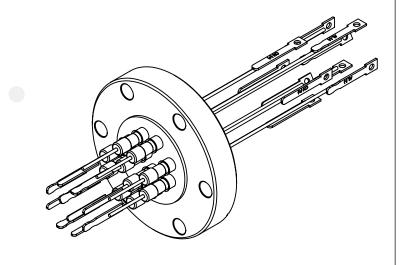


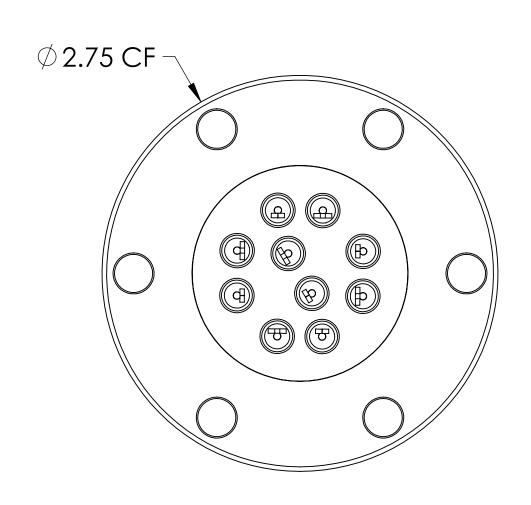

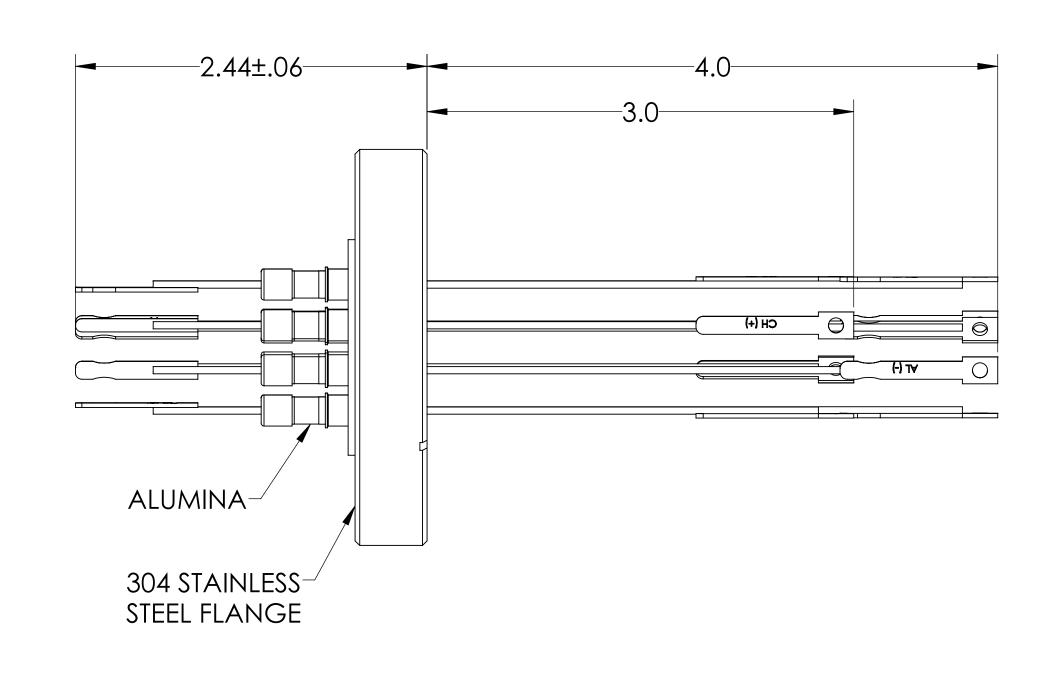

PART #	T/C TYPE
A0459-1-CF	K
A0459-2-CF	J
A0459-3-CF	С
A0459-4-CF	Е





SHEET 1 OF 1

SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 5 Pairs, Miniature Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #						
	N/A						
DIMENSIONS ARE IN INCHES		NAME	DATE		ADE DOODLIGTS IN	10	
TOLERANCES:	DRAWN	WJ	9/11/2015	$\mid N \mid$	MPF PRODUCTS IN	VC.	
ANICHIAD: MACHE 1/0°	CHECKED		9/11/2015	TITL	E:		
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:						
===				THERMOCOUPLE, 5 PAIRS, CONNECTOR, 275CF			
MATERIAL	APPLICATION						
	NEXT ASSY USED ON		}				
				DOV	WNLOADED FROM MPFPI.CO	М	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV	
DLATING	UNLESS OTH	INLESS OTHERWISE SPECIFIED:			A0459		
PLATING	ALL DIAMETERS REMOVE ALL BL		TRIC WITHIN .005. SHARP EDGES	F	Friday, February 8, 2019 8:36:11 AM		