


MPF PRODUCTS INC




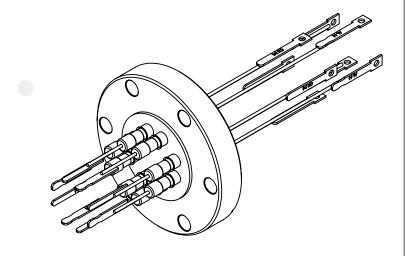

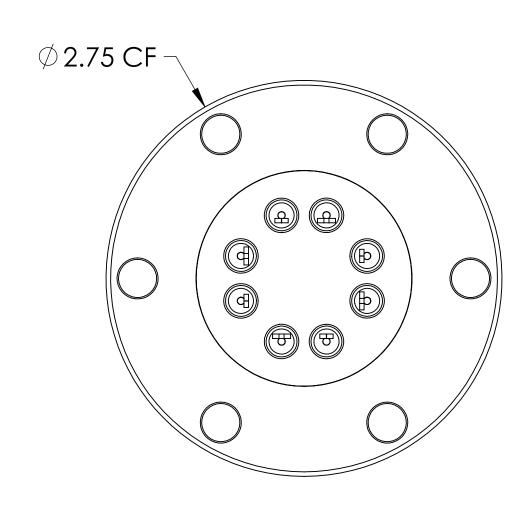

PART #	T/C TYPE
A0462-1-CF	K
A0462-2-CF	J
A0462-3-CF	С
A0462-4-CF	E

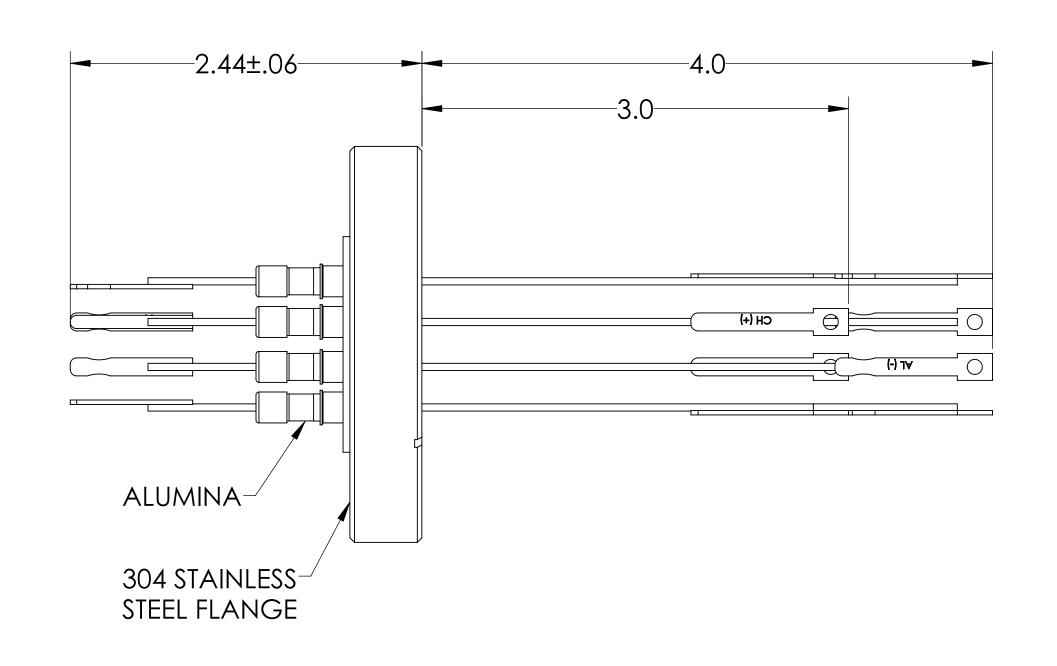



SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 4 Pairs, Miniature Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		\ 1 / A			
DIAMENICIONIC ADE INTINICITES	N/A						
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE		MPF PRODUCTS INC		
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL + .030	DRAWN	WJ	9/11/2015	IV	ILL LKODOCI2 II	NC.	
	CHECKED		9/11/2015	TITL	E:		
	ENG APPR.	WJ	9/11/2015				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:						
MATERIAL			THERMOCOUPLE, 4 PAIRS, CONNECTOR, 275CF				
	NEXT ASSY	APPLICATIO	USED ON				
				DOV	WNLOADED FROM MPFPI.CC	M	
FINISH	SURFACE FINIS	SH: 6	OR BETTER	DWG	G. NO.	REV	
PLATING	UNLESS OTHERWISE SPECIFIED:		A0462				
TEXTINO	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, February 8, 2019 8:35:35 AM				
e without the written permission of MPF products Inc. is prohibited. SHEET 1 OF 1							