


MPF PRODUCTS INC.

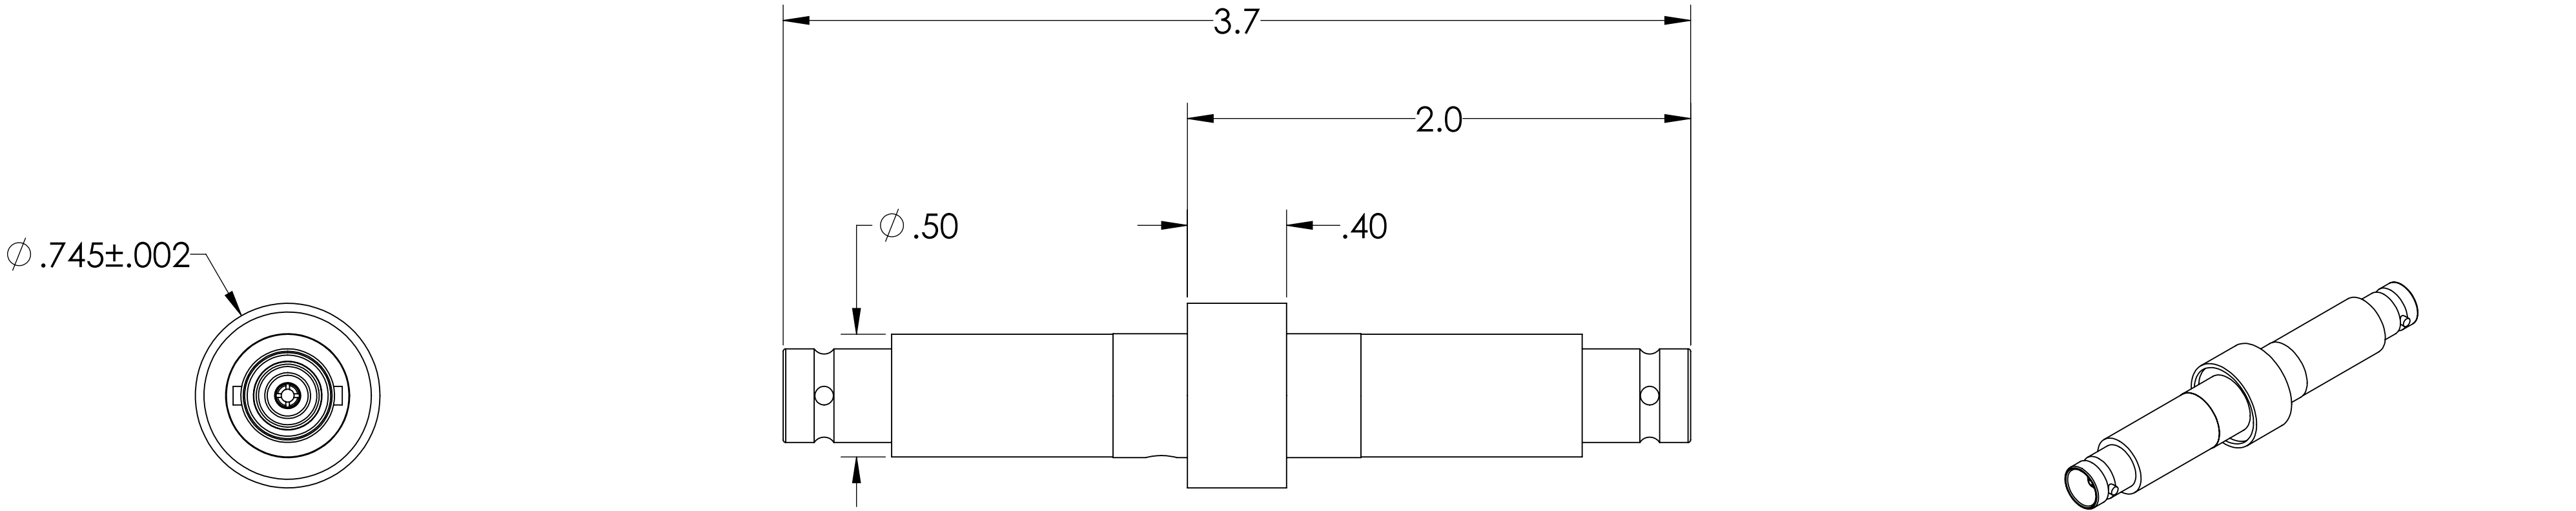

PART #	AIRSIDE CONNECTOR INCLUDED
A0471-2-W	YES
A0471-5-W	NO

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 5000 VOLTS DC
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 0.745" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH $\pm 1/2^\circ$ TWO PLACE DECIMAL $\pm .030$ THREE PLACE DECIMAL $\pm .015$	DRAWN	WJ	DATE	9/11/2015
	CHECKED			9/11/2015
	ENG APPR.	WJ		9/11/2015
	THIRD ANGLE: 			
MATERIAL	APPLICATION NEXT ASSY USED ON			
FINISH	SURFACE FINISH: $\sqrt{32}$ OR BETTER			
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
TITLE: MHV COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, DOUBLE ENDED, 0.745" DIA SS WELD ADAPTER		DWG. NO. A0471 MHV REV.		
DOWNLOADED FROM MPFPI.COM		Monday, January 21, 2019 8:50:09 AM		