
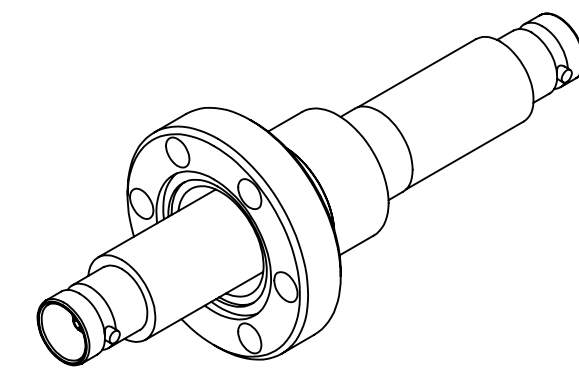
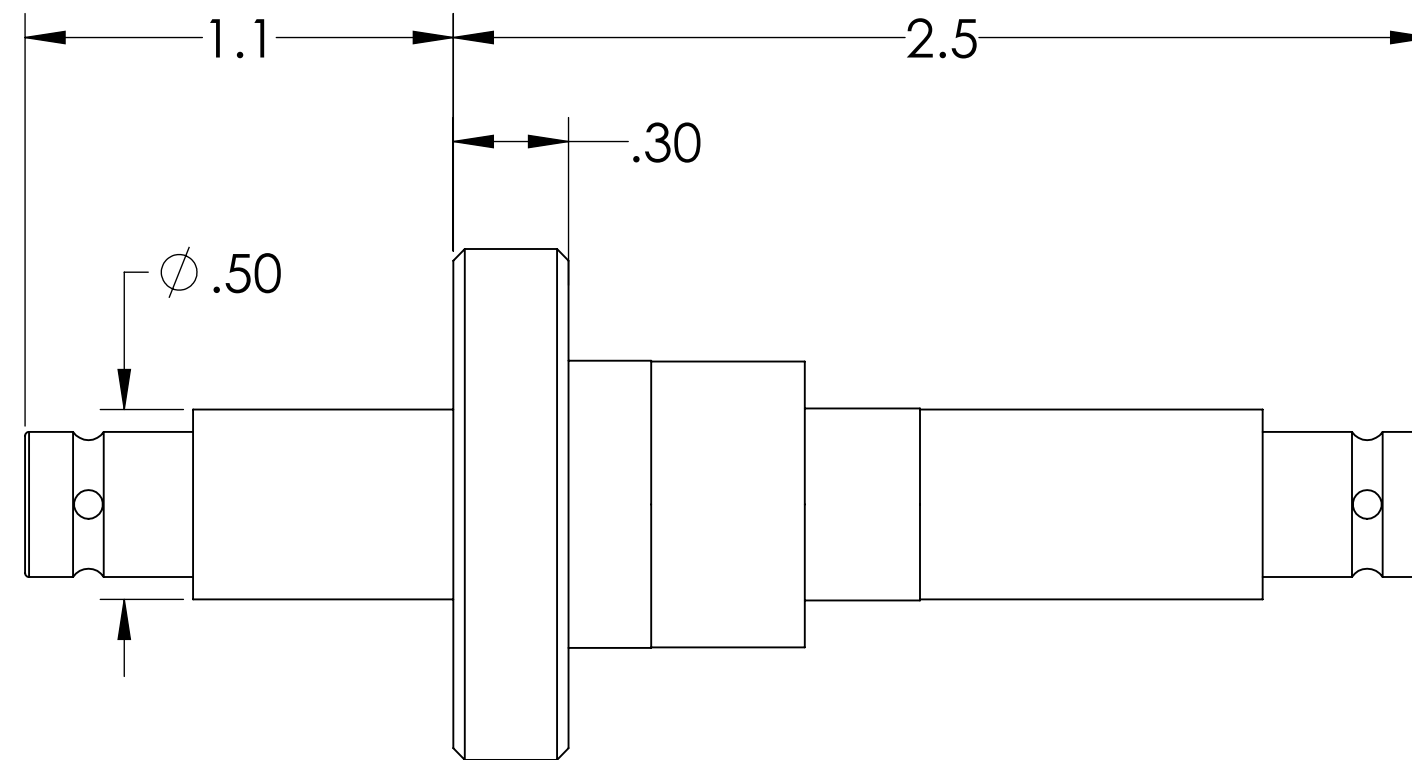


# MPF PRODUCTS INC.

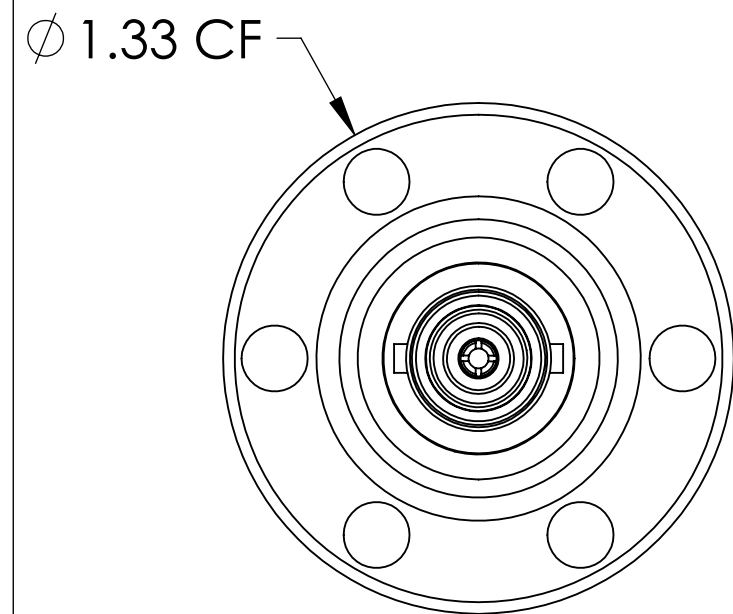


PART #	AIRSIDE CONNECTOR INCLUDED
A0472-1-CF	YES
A0472-3-CF	NO

**NOTE:**

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 1.33" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	TITLE: BNC COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, DOUBLE ENDED, 1.33" CONFLAT FLANGE
MATERIAL	THIRD ANGLE:		DOWNLOADED FROM MPFPI.COM
			DWG. NO. A0472 BNC
FINISH	SURFACE FINISH: 63 OR BETTER		REV.
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Monday, January 21, 2019 9:20:36 AM