


MPF PRODUCTS INC.

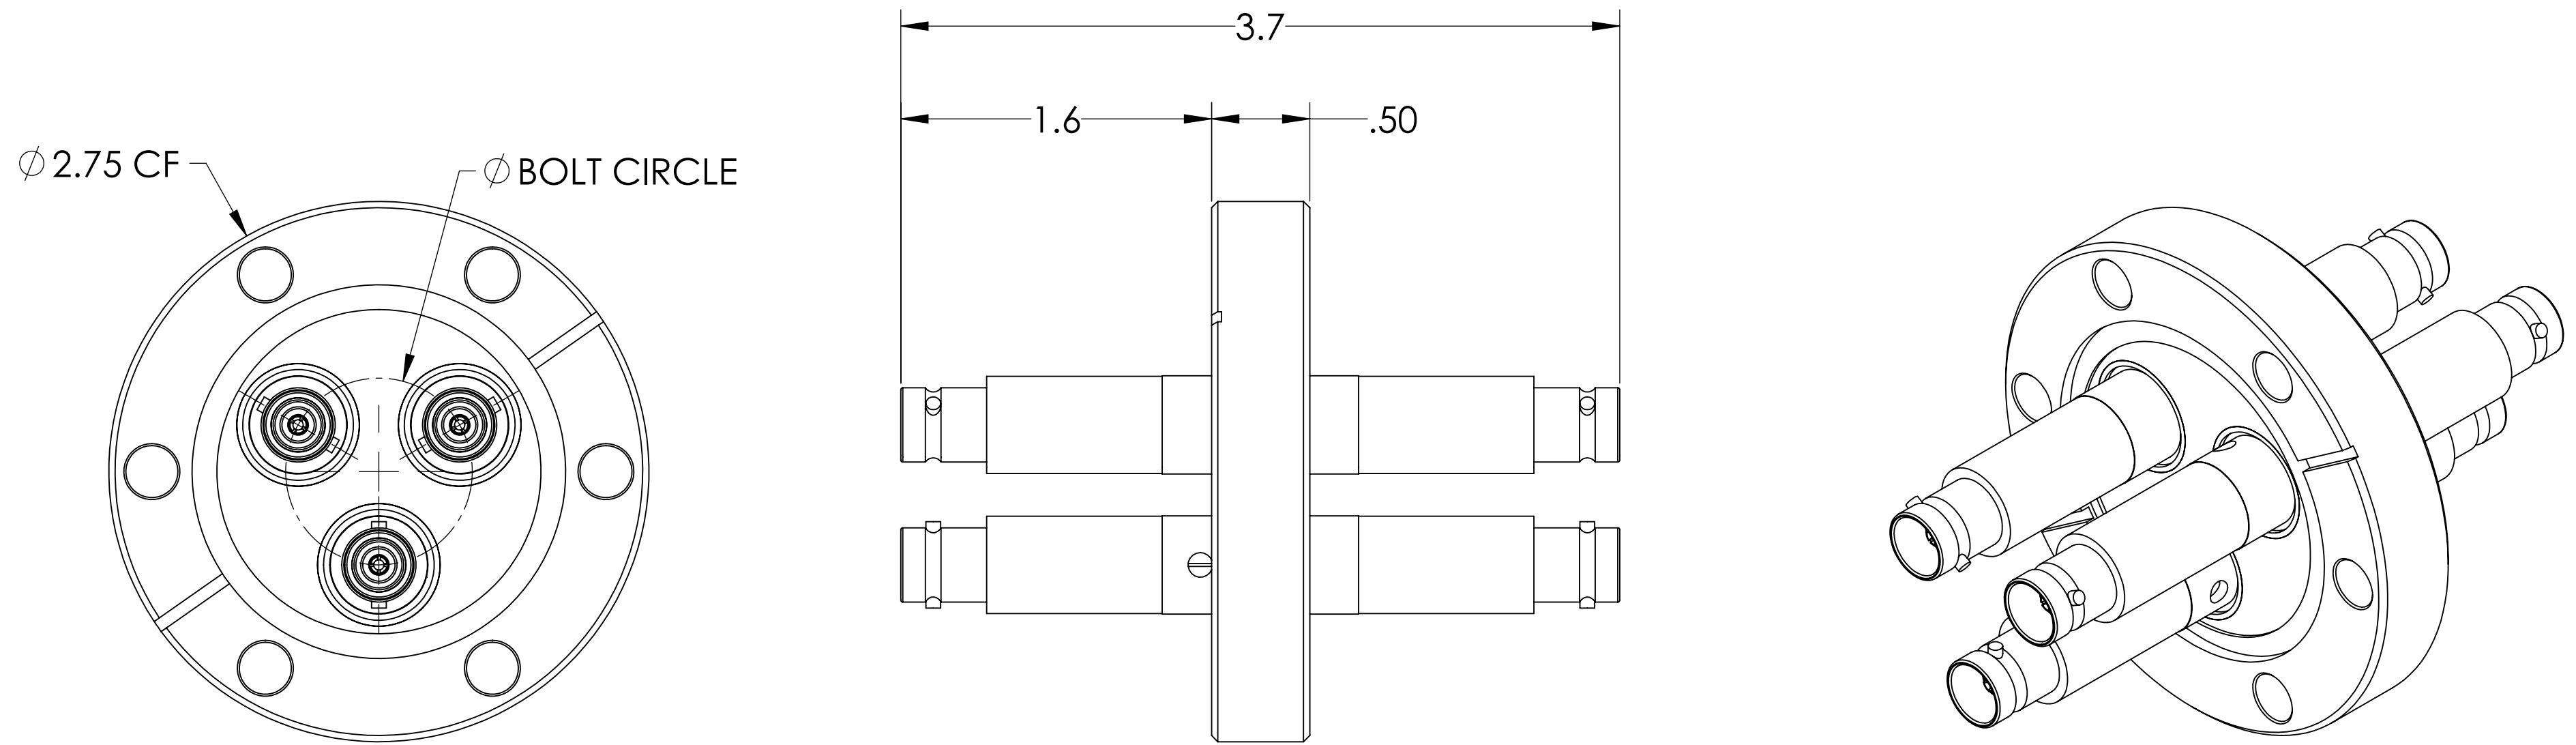


PART #	BOLT CIRCLE Ø	FEEDTHROUGH QTY.	AIRSIDE CONNECTOR INCLUDED
A0473-1-CF	OMIT	1	YES
A0473-3-CF	.75	2	YES
A0473-5-CF	.95	3	YES

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1/2/3 Pin, Grounded Shield, Double Ended, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: BNC COAXIAL FEEDTHROUGH, 1/2/3 PIN, GROUNDED SHIELD, DOUBLE ENDED, 2.75" CONFLAT FLANGE DWG. NO. A0473 BNC		
ANGULAR: MACH ± 1/2°		DRAWN	WJ			9/11/2015
TWO PLACE DECIMAL ± .030		CHECKED				9/11/2015
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ			9/11/2015
MATERIAL		THIRD ANGLE:		DOWNLOAD FROM MPFPI.COM Monday, January 21, 2019 9:24:22 AM		
FINISH				SURFACE FINISH: 63 OR BETTER		
PLATING		APPLICATION NEXT ASSY USED ON		UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		