
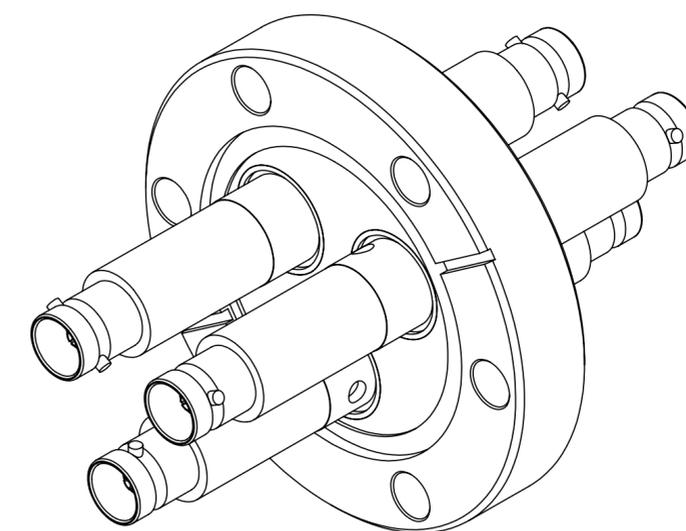
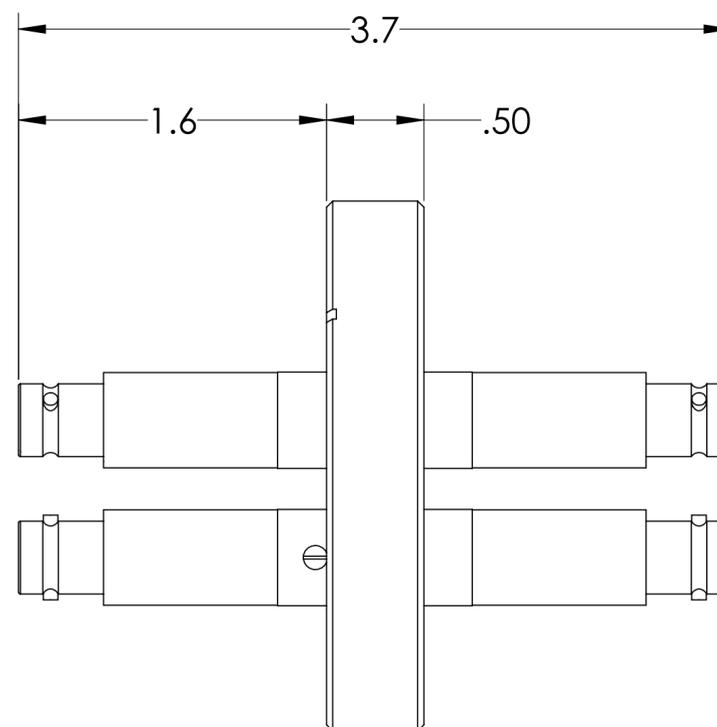


## MPF PRODUCTS INC.

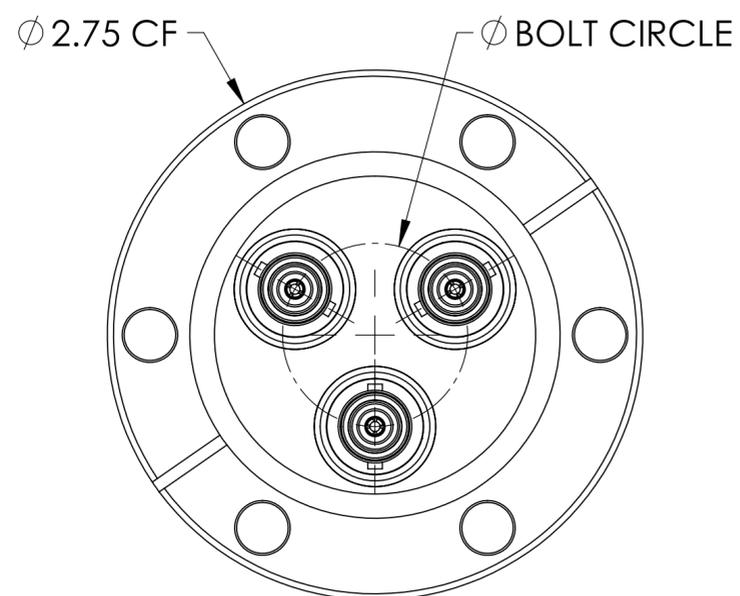


PART #	BOLT CIRCLE Ø	FEEDTHROUGH QTY.	AIRSIDE CONNECTOR INCLUDED
A0473-2-CF	OMIT	1	YES
A0473-4-CF	.75	2	YES
A0473-6-CF	.95	3	YES

## NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 5000 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1/2/3 Pin, Grounded Shield, Double Ended, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #	
DIMENSIONS ARE IN INCHES		N/A	
TOLERANCES:		NAME	DATE
ANGULAR: MACH ± 1/2°		WJ	9/11/2015
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ 9/11/2015
MATERIAL		THIRD ANGLE:	
APPLICATION			
NEXT ASSY		USED ON	
FINISH		SURFACE FINISH: 63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		TITLE: MHV COAXIAL FEEDTHROUGH, 1/2/3 PIN, GROUNDED SHIELD, DOUBLE ENDED, 2.75" CONFLAT FLANGE	
		DOWNLOADED FROM MPFPI.COM	
		DWG. NO. A0473 MHV	
		REV.	
		Monday, January 21, 2019 9:25:09 AM	