
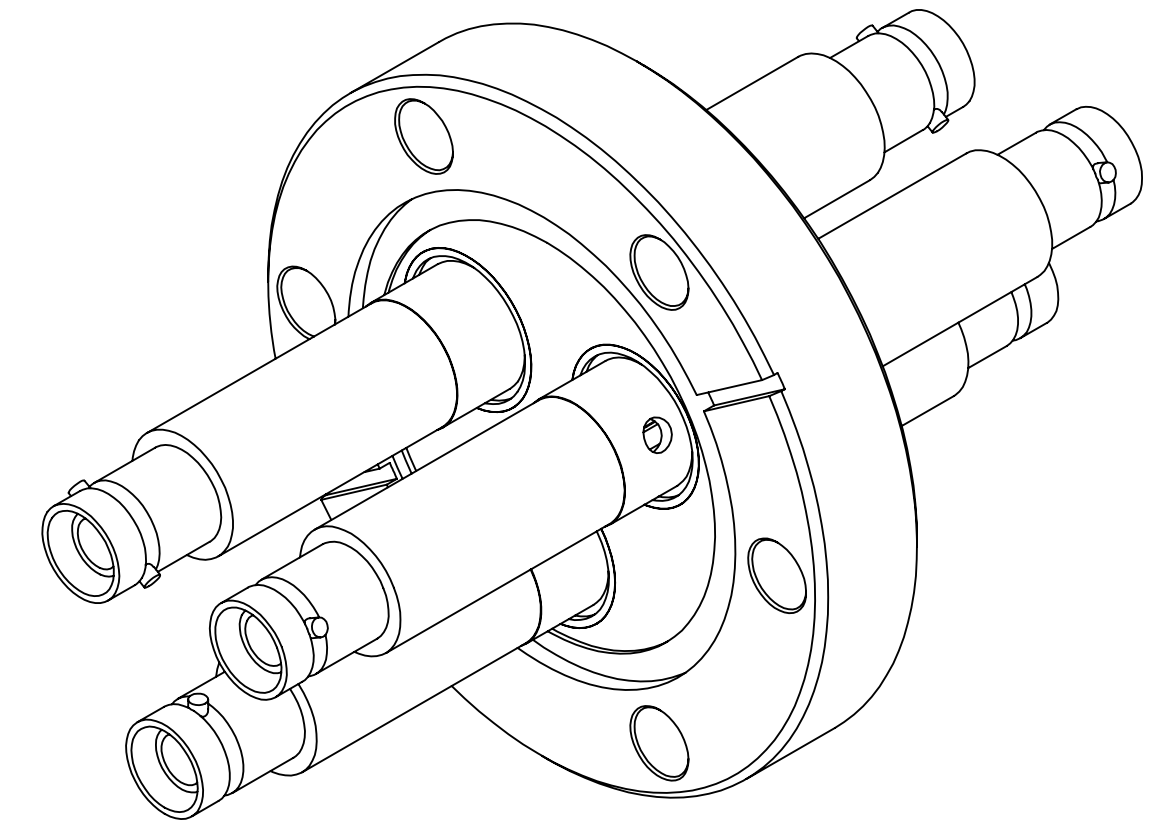
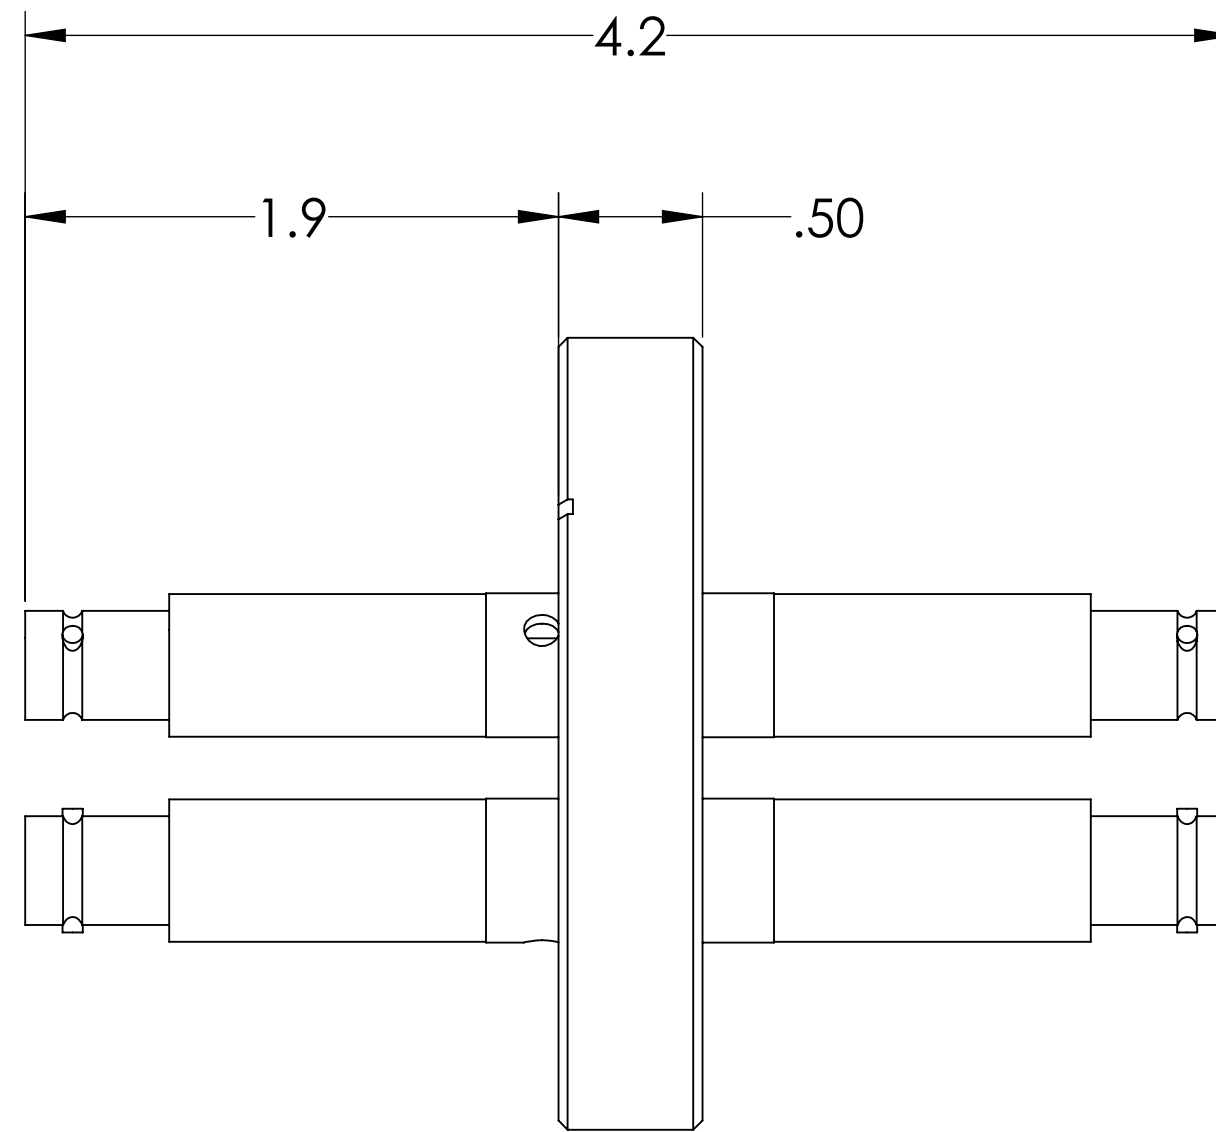


MPF PRODUCTS INC.

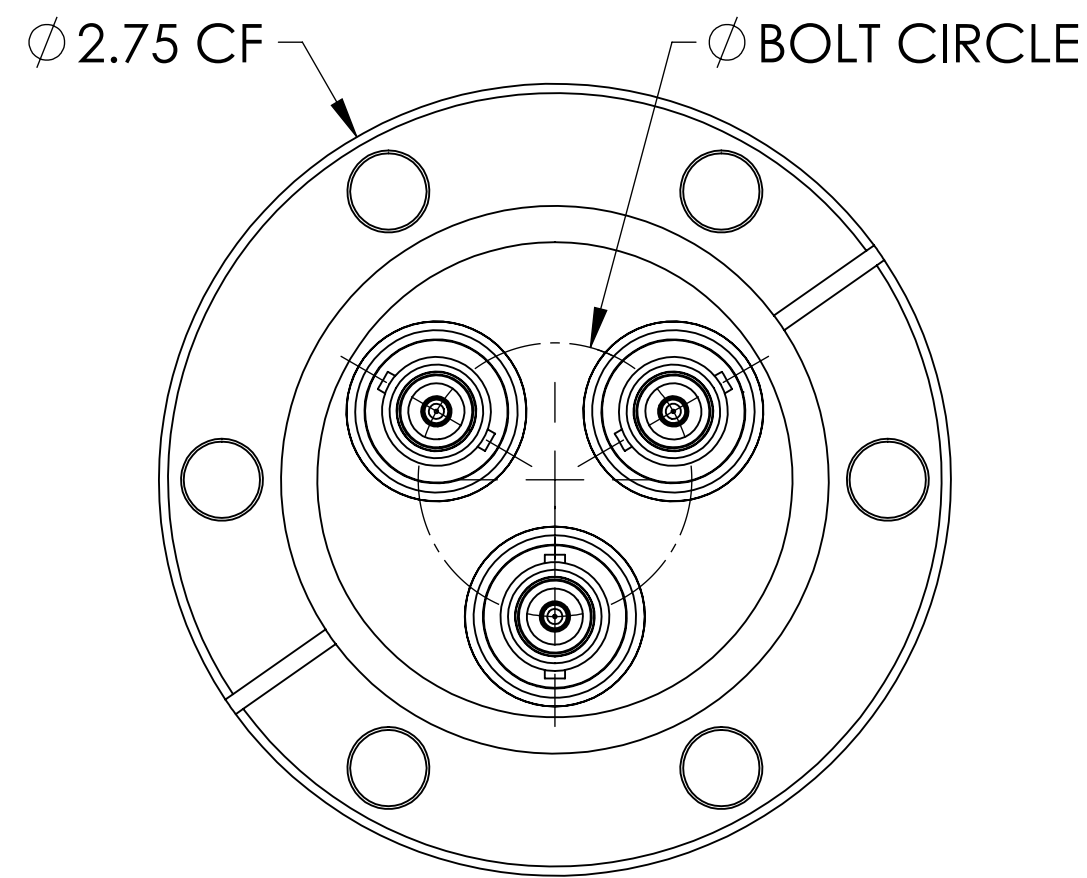


PART #	BOLT CIRCLE ϕ	FEEDTHROUGH QTY.	AIRSIDE CONNECTOR INCLUDED
A0473-7-CF	OMIT	1	YES
A0473-8-CF	.75	2	YES
A0473-9-CF	.95	3	YES

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 5000 VOLTS DC SHIELD TO GROUND, 500V PIN TO SHEILD
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1/2/3 Pin, Grounded Shield, Double Ended, 2.75" Conflat Flange, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: SHV-5 COAXIAL FEEDTHROUGH, 1/2/3 PIN, GROUNDED SHIELD, DOUBLE ENDED, 2.75" CONFLAT FLANGE DOWNLOADED FROM MPFPI.COM DWG. NO. A0473 SHV REV	
ANGULAR: MACH $\pm 1/2^\circ$		DRAWN	9/11/2015		
TWO PLACE DECIMAL $\pm .030$		CHECKED	9/11/2015		
THREE PLACE DECIMAL $\pm .015$		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:			
FINISH		APPLICATION			
PLATING		NEXT ASSY		USED ON	
		SURFACE FINISH:		63 OR BETTER	
		UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		DATE		Monday, January 21, 2019 9:24:53 AM	