



MPF PRODUCTS INC.

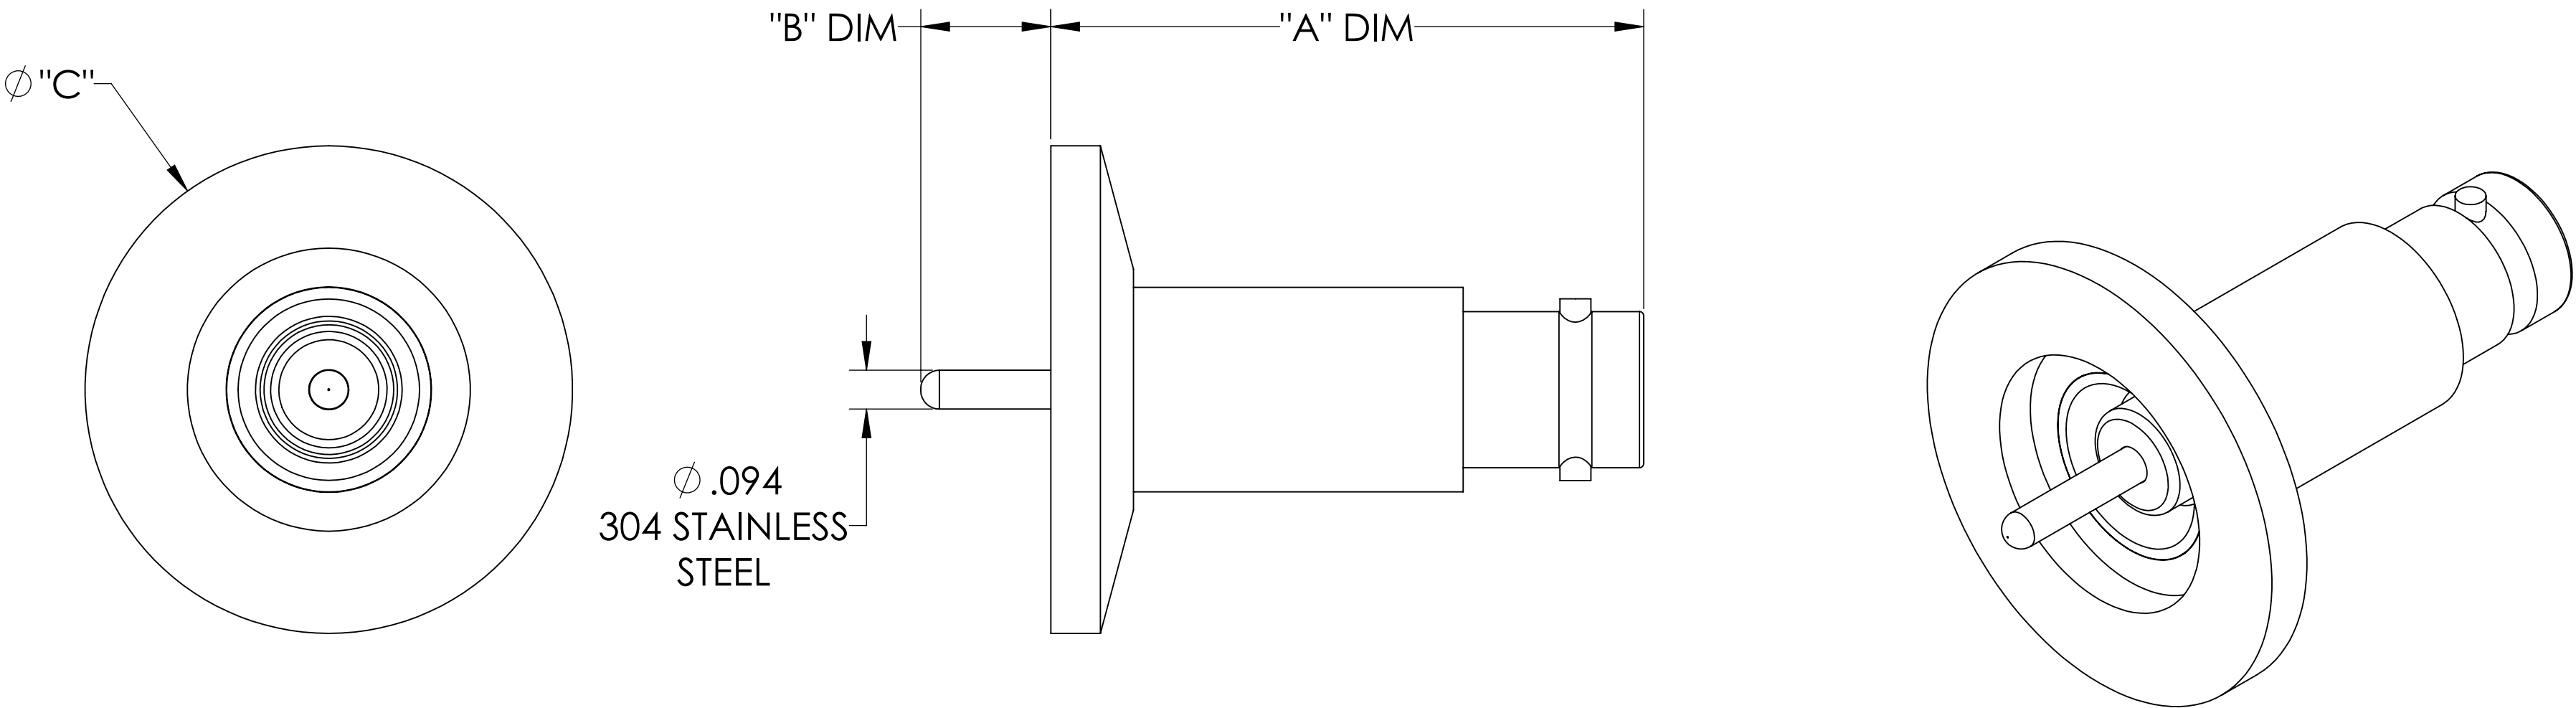

PART #	"A" DIM	"B" DIM	Ø "C"	B.C.	FEEDTHROUGH QTY.	AIRSIDE CONNECTOR INCLUDED
A0476-1-QF	1.43	.30	1.18	OMIT	1	YES
A0476-2-QF	1.33	.40	2.16	OMIT	1	YES
A0476-3-QF	1.33	.40	2.16	.75	2	YES
A0476-4-QF	1.33	.40	2.95	.95	3	YES
A0476-5-QF	1.33	.40	2.95	.95	4	YES

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 500 VOLTS DC
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1/2/3/4 Pin, Grounded Shield, QF/KF, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°		WJ	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		CHECKED		9/11/2015	
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ	9/11/2015	TITLE:
MATERIAL		THIRD ANGLE:			BNC COAXIAL FEEDTHROUGH, 1/2/3/4 PIN, GROUNDED SHIELD, QF/KF
		APPLICATION			
		NEXT ASSY			USED ON
FINISH		SURFACE FINISH:			63/ OR BETTER
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
Thursdays, January 17, 2019 3:25:06 PM					REV