

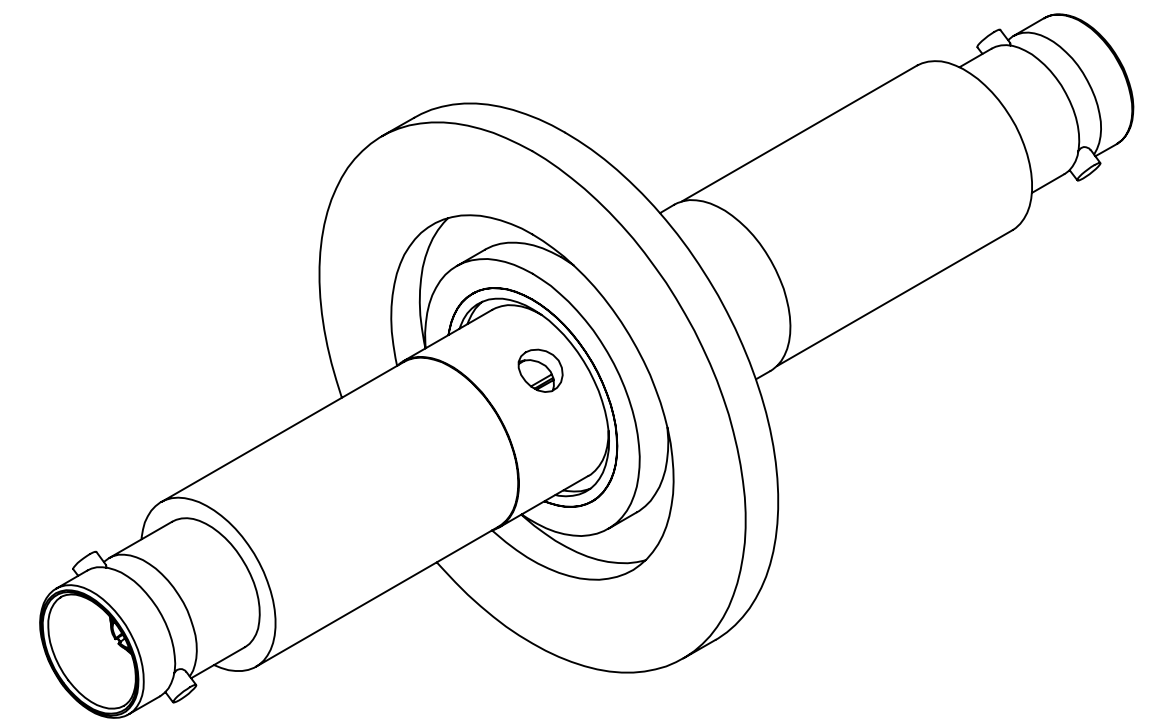
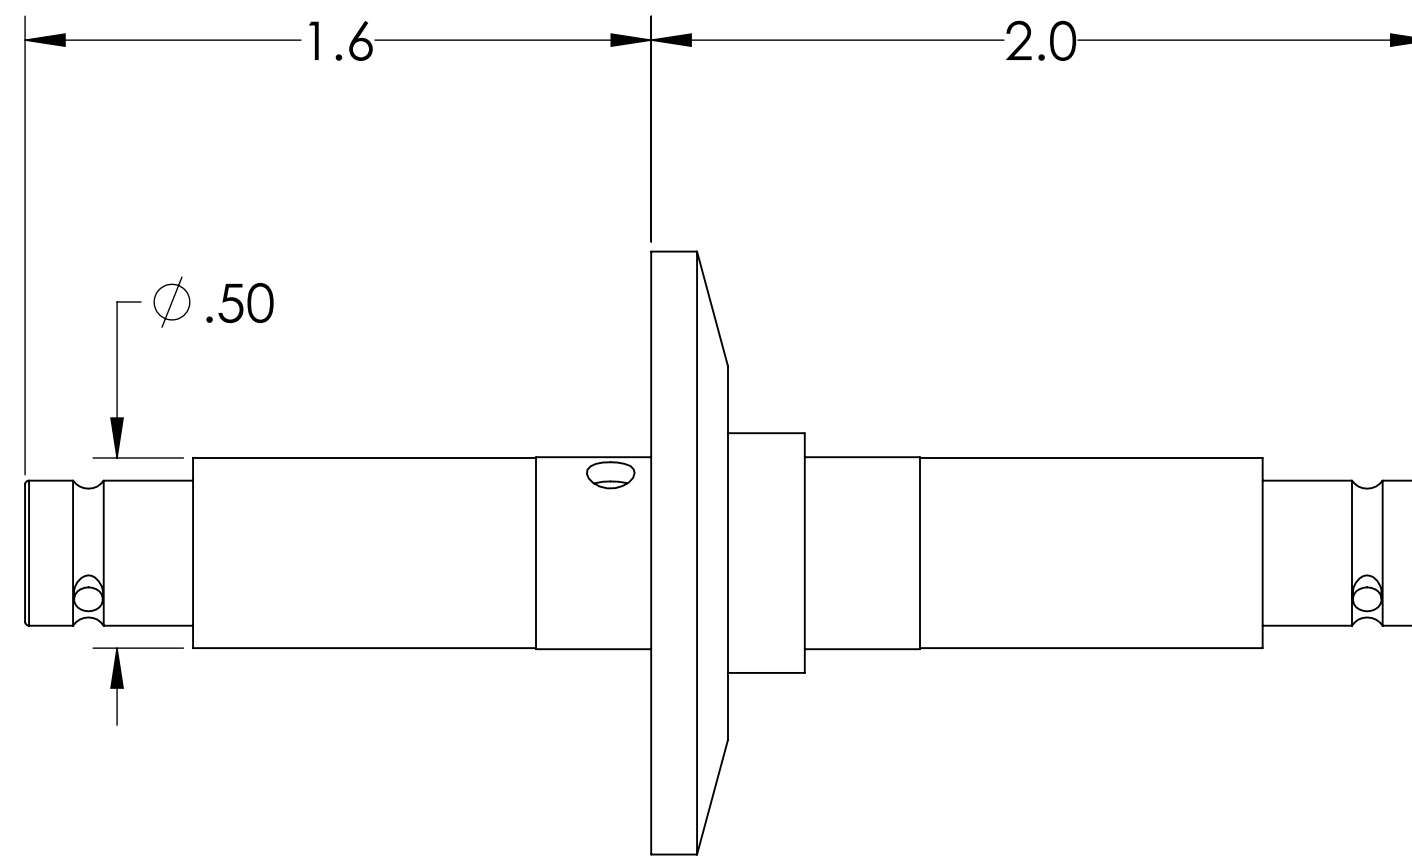


MPF PRODUCTS INC.

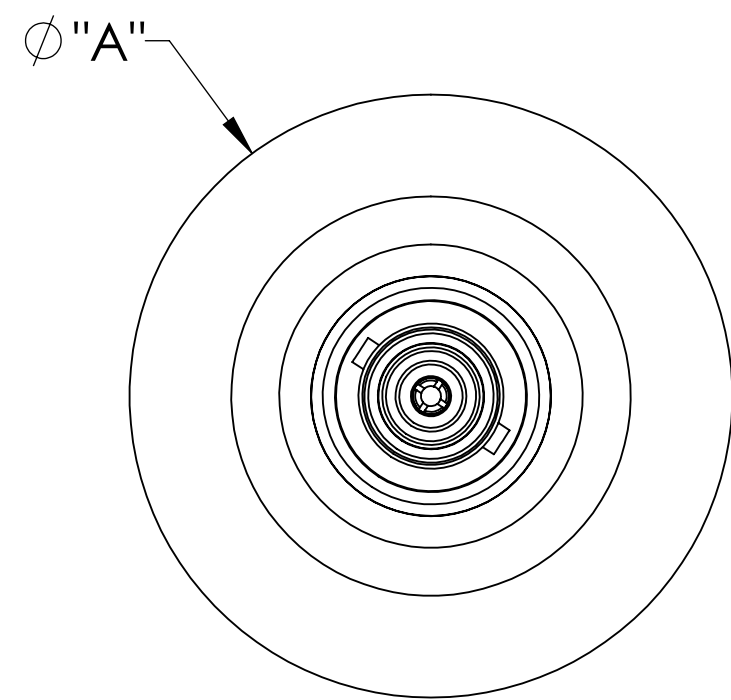

PART #	"A" DIM	B.C.	FEEDTHROUGH QTY.	AIRSIDE CONNECTOR INCLUDED
A0478-1-QF	1.57	OMIT	1	YES
A0478-3-QF	2.16	OMIT	1	YES
A0478-5-QF	2.95	.95	2	YES
A0478-7-QF	2.95	.95	3	YES
A0478-9-QF	2.16	.75	2	YES
A0478-11-QF	2.95	OMIT	1	YES



NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1/2/3 Pin, Grounded Shield, Double Ended, QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: BNC COAXIAL FEEDTHROUGH, 1/2/3 PIN, GROUNDED SHIELD, DOUBLE ENDED, QF/KF	
FINISH					
PLATING		APPLICATION: NEXT ASSY: USED ON:			
SURFACE FINISH:		63 OR BETTER		DOWNLOAD FROM MPFPI.COM DWG. NO. REV	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A0478 BNC REV	
		Thursday, January 17, 2019 3:22:44 PM			