



MPF PRODUCTS INC.



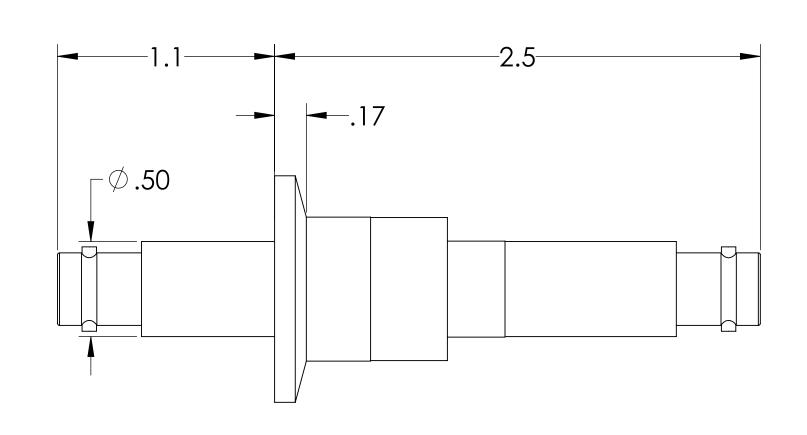

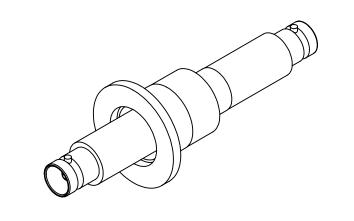

AIRSIDE CONNECTOR INCLUDED
YES
NO



NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 500 VOLTS DC

3. CURRENT: 3 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 1.18" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	: QUOTATION #				
UNLESS OTTERWISE STECTIED.	Q001/\	(11011		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	AADE DDODLICTS INIC	
	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITLE: BLIG GG ANGAL	
	ENG APPR.	WJ	9/11/2015	BNC COAXIAL	
	THIRD ANGLE:			FEEDTHROUGH, 1 PIN,	
AAATEDIAI				GROUNDED SHIELD,	
MATERIAL				DOUBLE ENDED, 1.18"	
APPLICATION NEXT ASSY USED ON			QF/KF		
				DOWNLOADED FROM MPFPI.COM	
FINISH	SURFACE FINIS	SH: 6	OR BETTER	DWG. NO. REV	
DI ATINIC	UNLESS OTHERWISE SPECIFIED:		SPECIFIED:	A0479 BNC	
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Thursday, January 17, 2019 3:20:57 PM	