

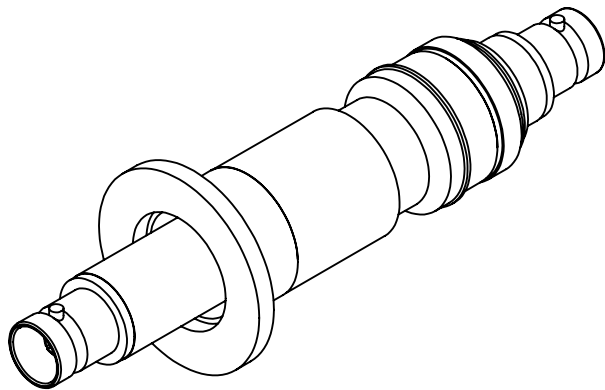


MPF PRODUCTS INC.

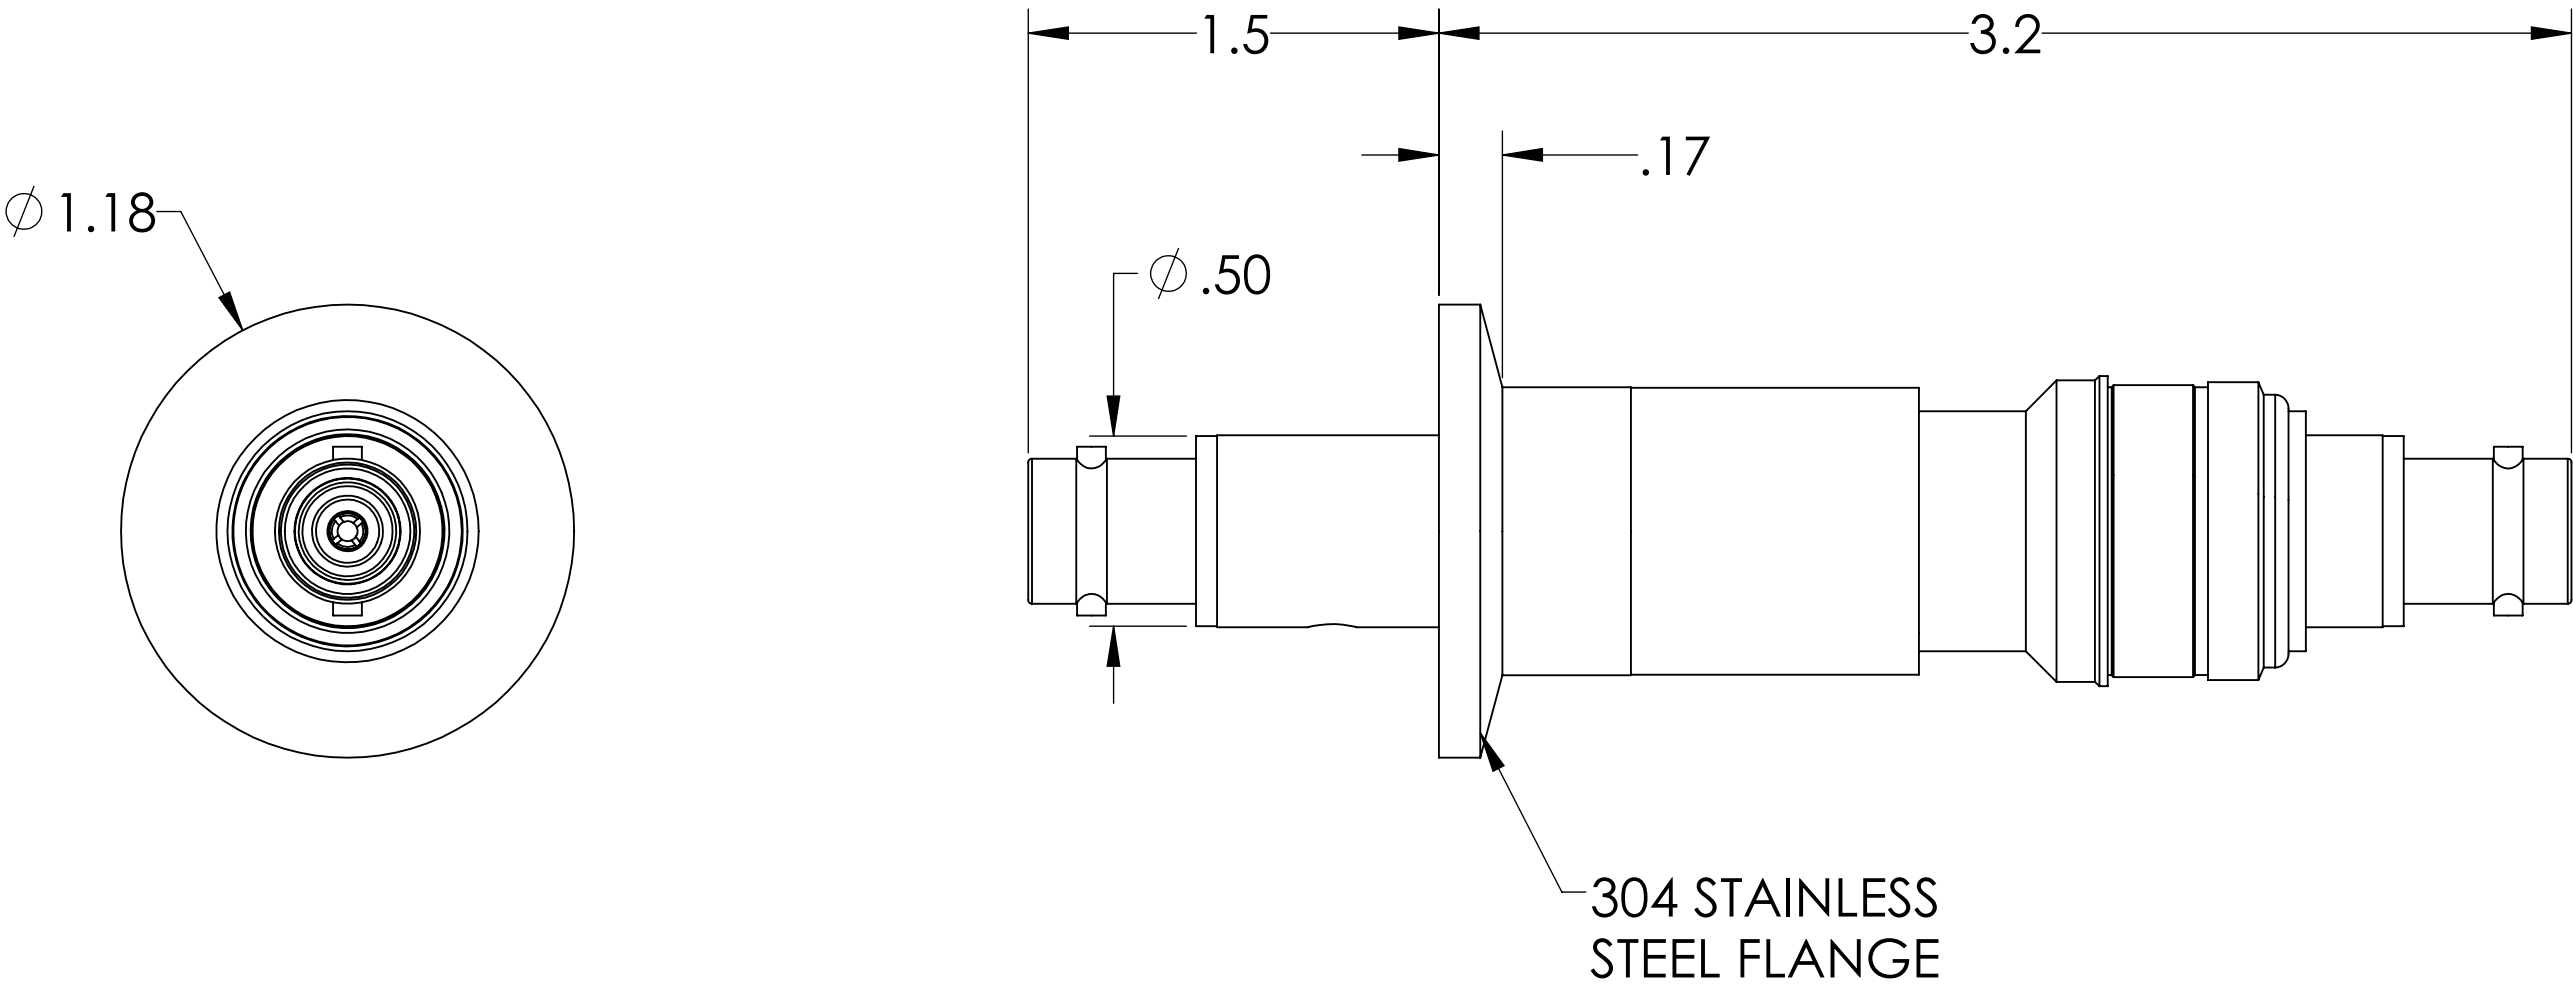

PART #	AIRSIDE CONNECTOR INCLUDED
A0480-3-QF	YES
A0480-6-QF	NO

- NOTE:
- 1. SHIELD: FLOATING
 - 2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 5000V PIN TO SHEILD
 - 3. CURRENT: 5 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Floating Shield, Double Ended, 1.18" QF/KF, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	WJ	DATE	9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED		9/11/2015	
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		THIRD ANGLE:			
MATERIAL					
		APPLICATION			
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		63/ OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			
		DWG. NO.		REV	
		A0480 SHV			
		Friday, January 18, 2019 8:04:18 AM			