
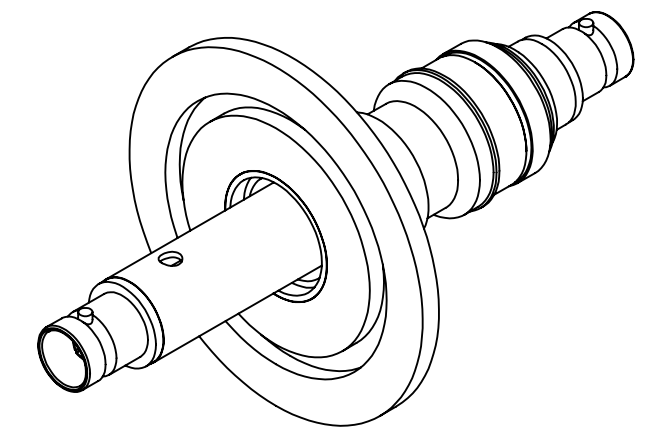
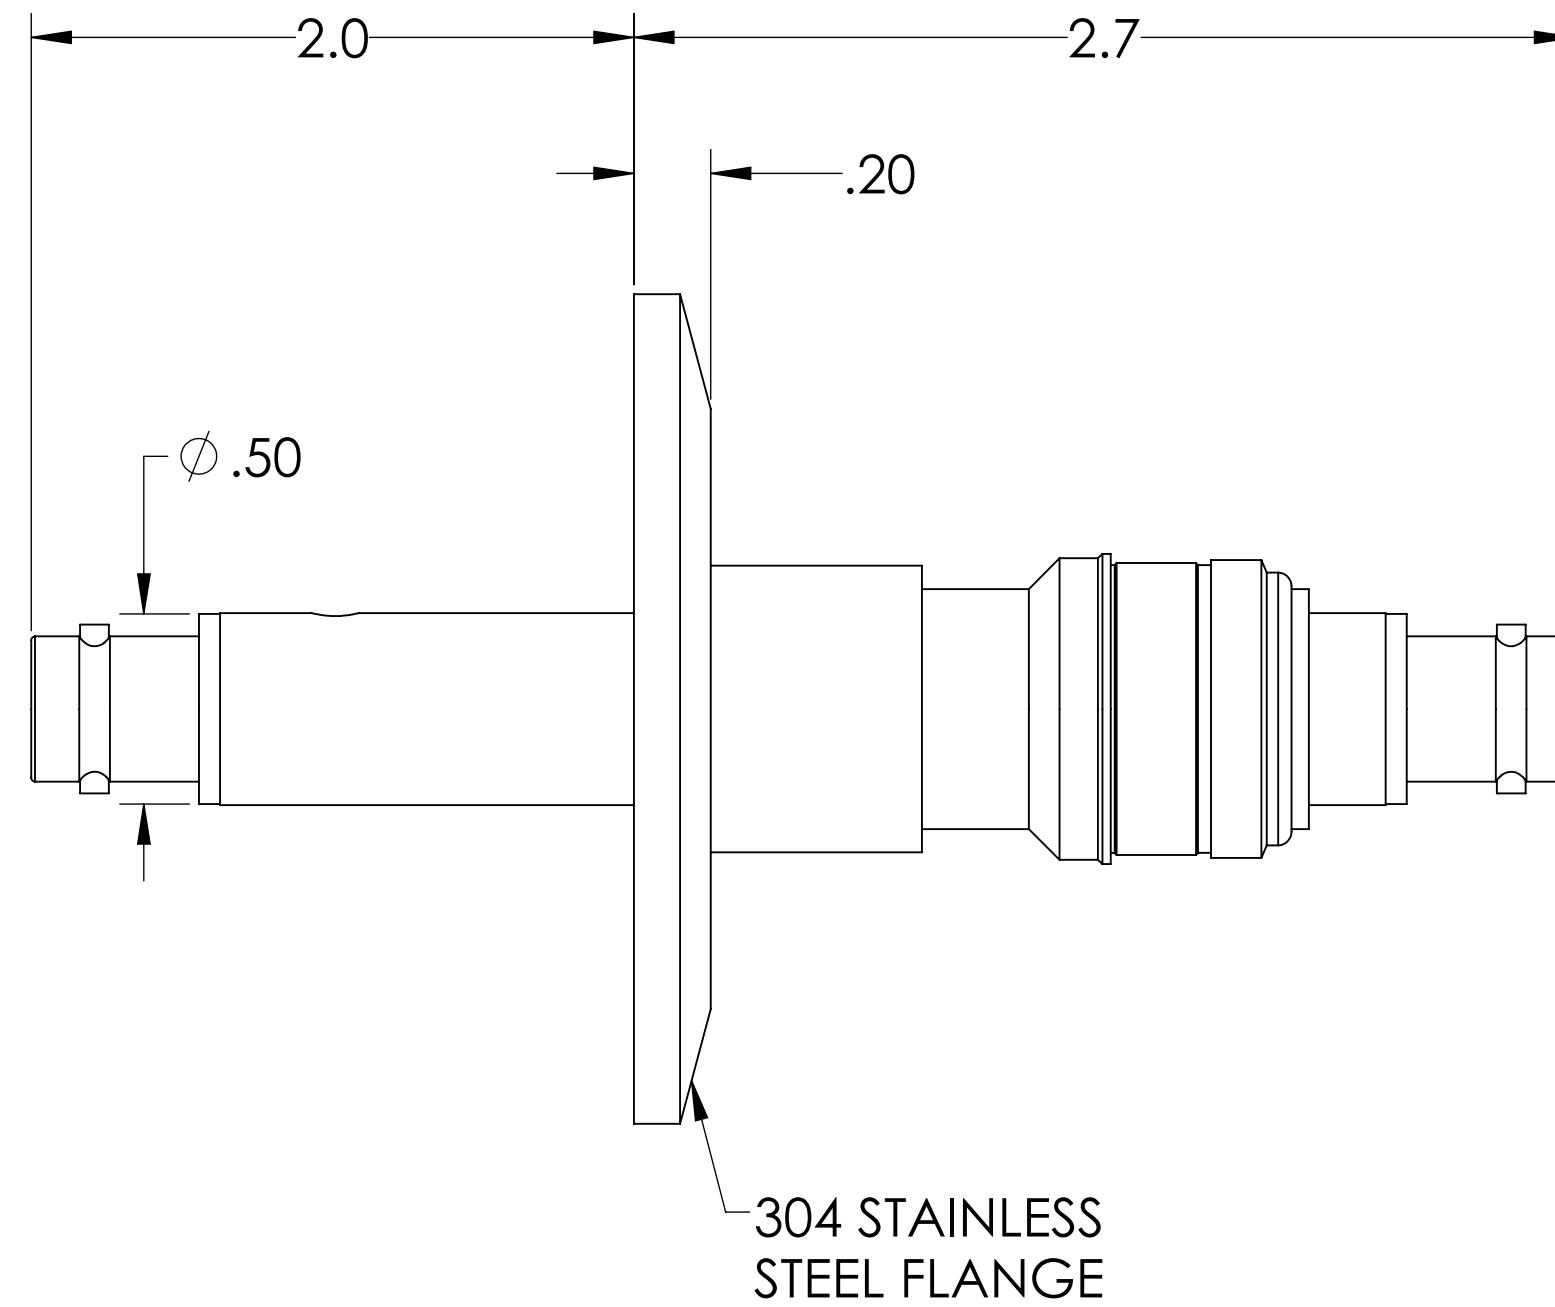


MPF PRODUCTS INC.

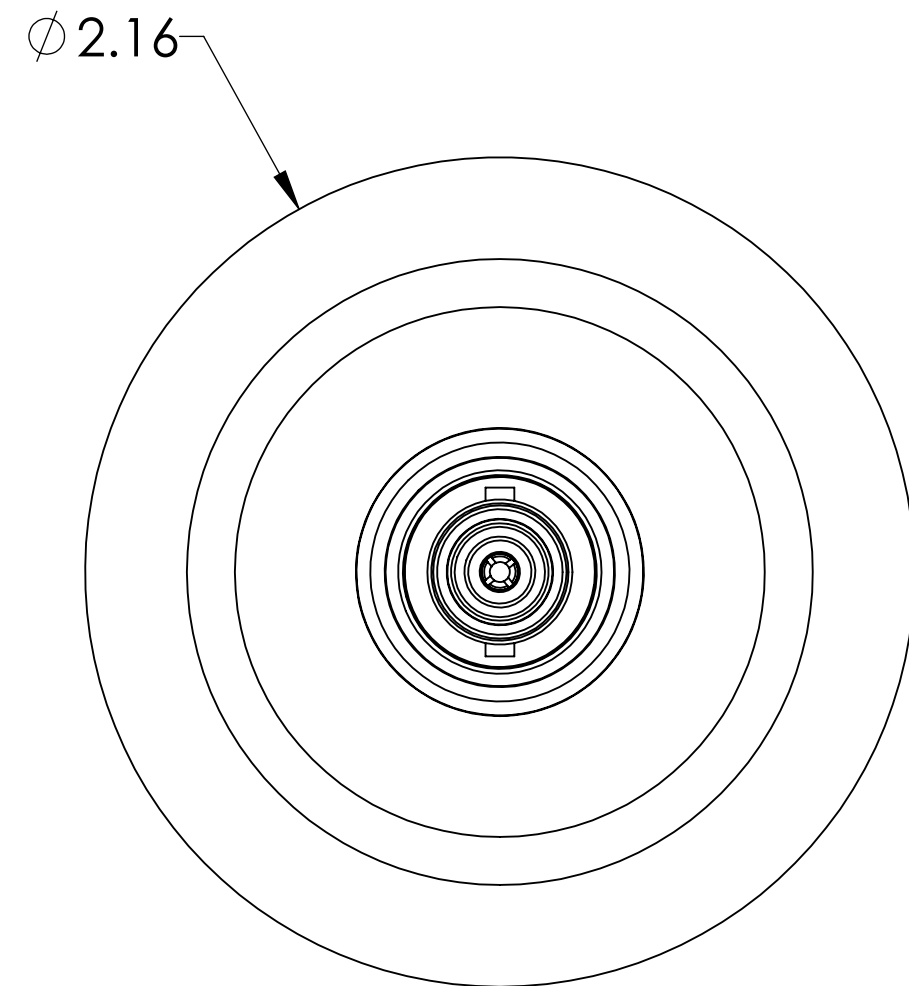


PART #	AIRSIDE CONNECTOR INCLUDED
A0481-3-QF	YES
A0481-6-QF	NO

NOTE:

1. SHIELD: FLOATING
2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 5000V PIN TO SHEILD
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-5 Coaxial Feedthrough, 1 Pin, Floating Shield, Double Ended, 2.16" QF/KF, UHV Compatible



UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION	TITLE: SHV-5 COAXIAL FEEDTHROUGH, 1 PIN, FLOATING SHIELD, DOUBLE ENDED, 2.16" QF/KF	
PLATING	SURFACE FINISH:	DWG. NO. A0481 SHV REV.	
	UNLESS OTHERWISE SPECIFIED:	DOWNLOAD FROM MPFPI.COM Friday, January 18, 2019 8:02:56 AM	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		