

## MPF PRODUCTS INC.



PART #	AIRSIDE CONNECTOR INCLUDED				
A0482-2-BP	YES				
A0482-5-BP	NO				

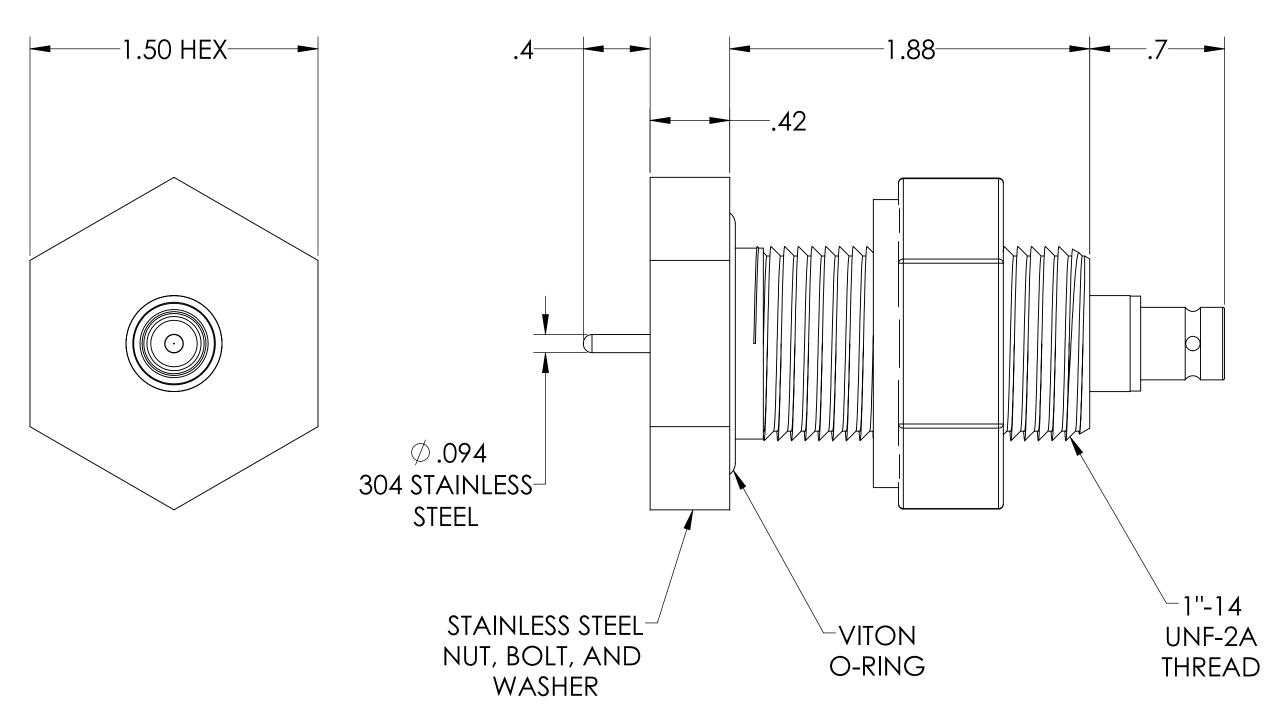



## NOTE:

- 1. SHIELD: GROUNDED
- 2. VOLTAGE: 500 VOLTS DC
- 3. CURRENT: 3 AMPS
- 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
- 5. IMPEDANCE: NON-CONSTANT

UNLESS OTHERWISE SPECIFIED:	QUOTATION #								
				N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE		AADE DDOO		LIOTC INIO		
	DRAWN	WJ	9/11/2015	$\sim$	MPF PRODUCTS INC				
ANGULAD: 444 CH : 1/0°	CHECKED		9/11/2015	TITL	LE:				
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015			BNC CC			
THREE PLACE DECIMAL ± .015	THIRD ANGLE:			BNC COAXIAL					
					FEEDTHROUGH, 1 PIN,				
MATERIAL	APPLICATION				GROUNDED SHIELD, 1" BASEPLATE BOLT				
				]	DASEPLATE BULT				
	NEXT ASSY		USED ON	-					
				DOV	VNLO	ADED FRC	M MPFPI.CC	M	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	3. NO			REV	
	UNLESS OTHERWISE SPECIFIED:			1		A0482	BNC		
PLATING					10 102	5110			
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Friday, January 18, 2019 8:58:59 AM					
SHEET 1 OF 1									

BNC Coaxial Feedthrough, 1 Pin, Grounded Shield, 1" Baseplate Bolt, UHV Compatible