


MPF PRODUCTS INC.

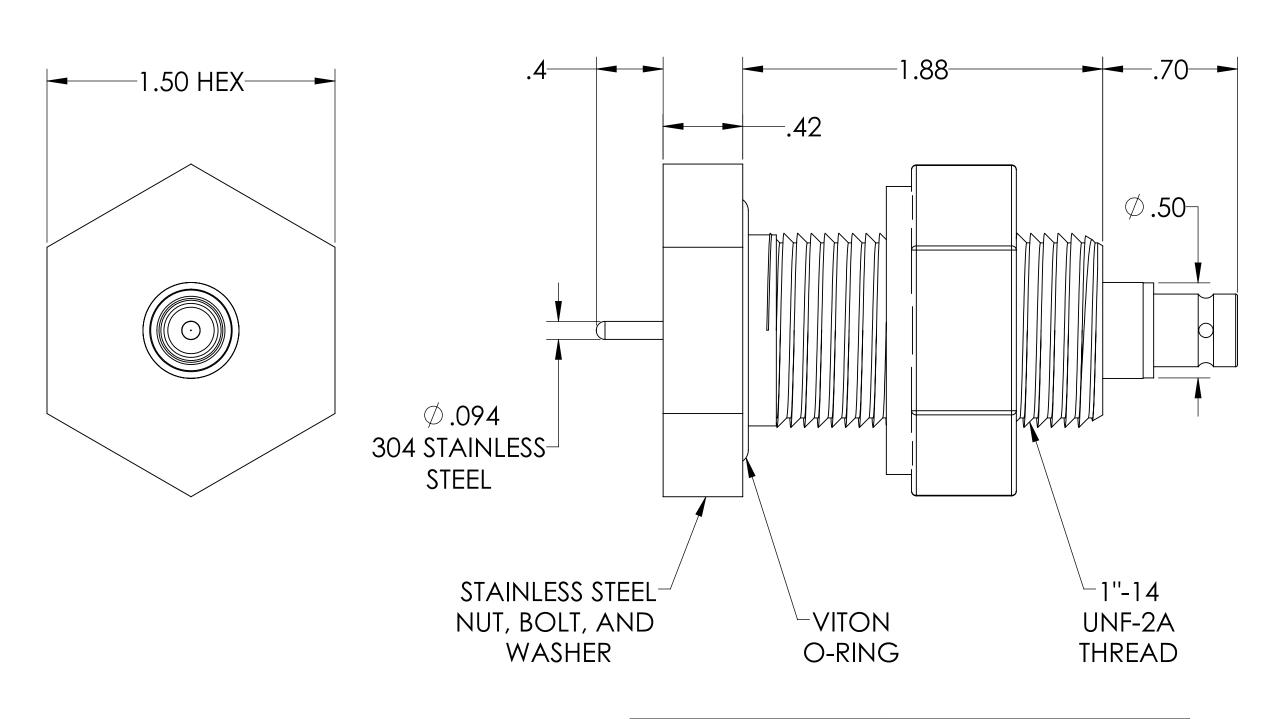

PART #	AIRSIDE CONNECTOR INCLUDED
A0482-1-BP	YES
A0482-4-BP	NO
AU482-4-BP	NO





NOTE:

1. SHIELD: GROUNDED

2. VOLTAGE: 5000 VOLTS DC

3. CURRENT: 3 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

UNLESS OTHERWISE SPECIFIED:	QUOTATION #								
	N/A								
DIMENSIONS ARE IN INCHES		NAME	DATE		, D.E.				
TOLERANCES:	DRAWN	WJ	9/11/2015	N	MPF PRODUCTS INC				
ANGULAD. MAGUL. 1/0°	CHECKED		9/11/2015	TITL	E:				
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015		MHV COAXIAL				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:								
					FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 1"				
MATERIAL									
				BASEPLATE BOLT					
	APPLICATION NEXT ASSY USED ON								
	NEXT ASST		02ED ON	1					
			DOWNLOADED FROM MPFPI.COM						
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO			REV	
	UNLESS OTHERWISE SPECIFIED:			1		40482	MHV		
PLATING						10-102	/ V 11 V		
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Friday, January 18, 2019 8:51:51 AM					
SHEET 1 OF 1									

MHV Coaxial Feedthrough, 1 Pin, Grounded Shield, 1" Baseplate Bolt, UHV Compatible