


MPF PRODUCTS INC.

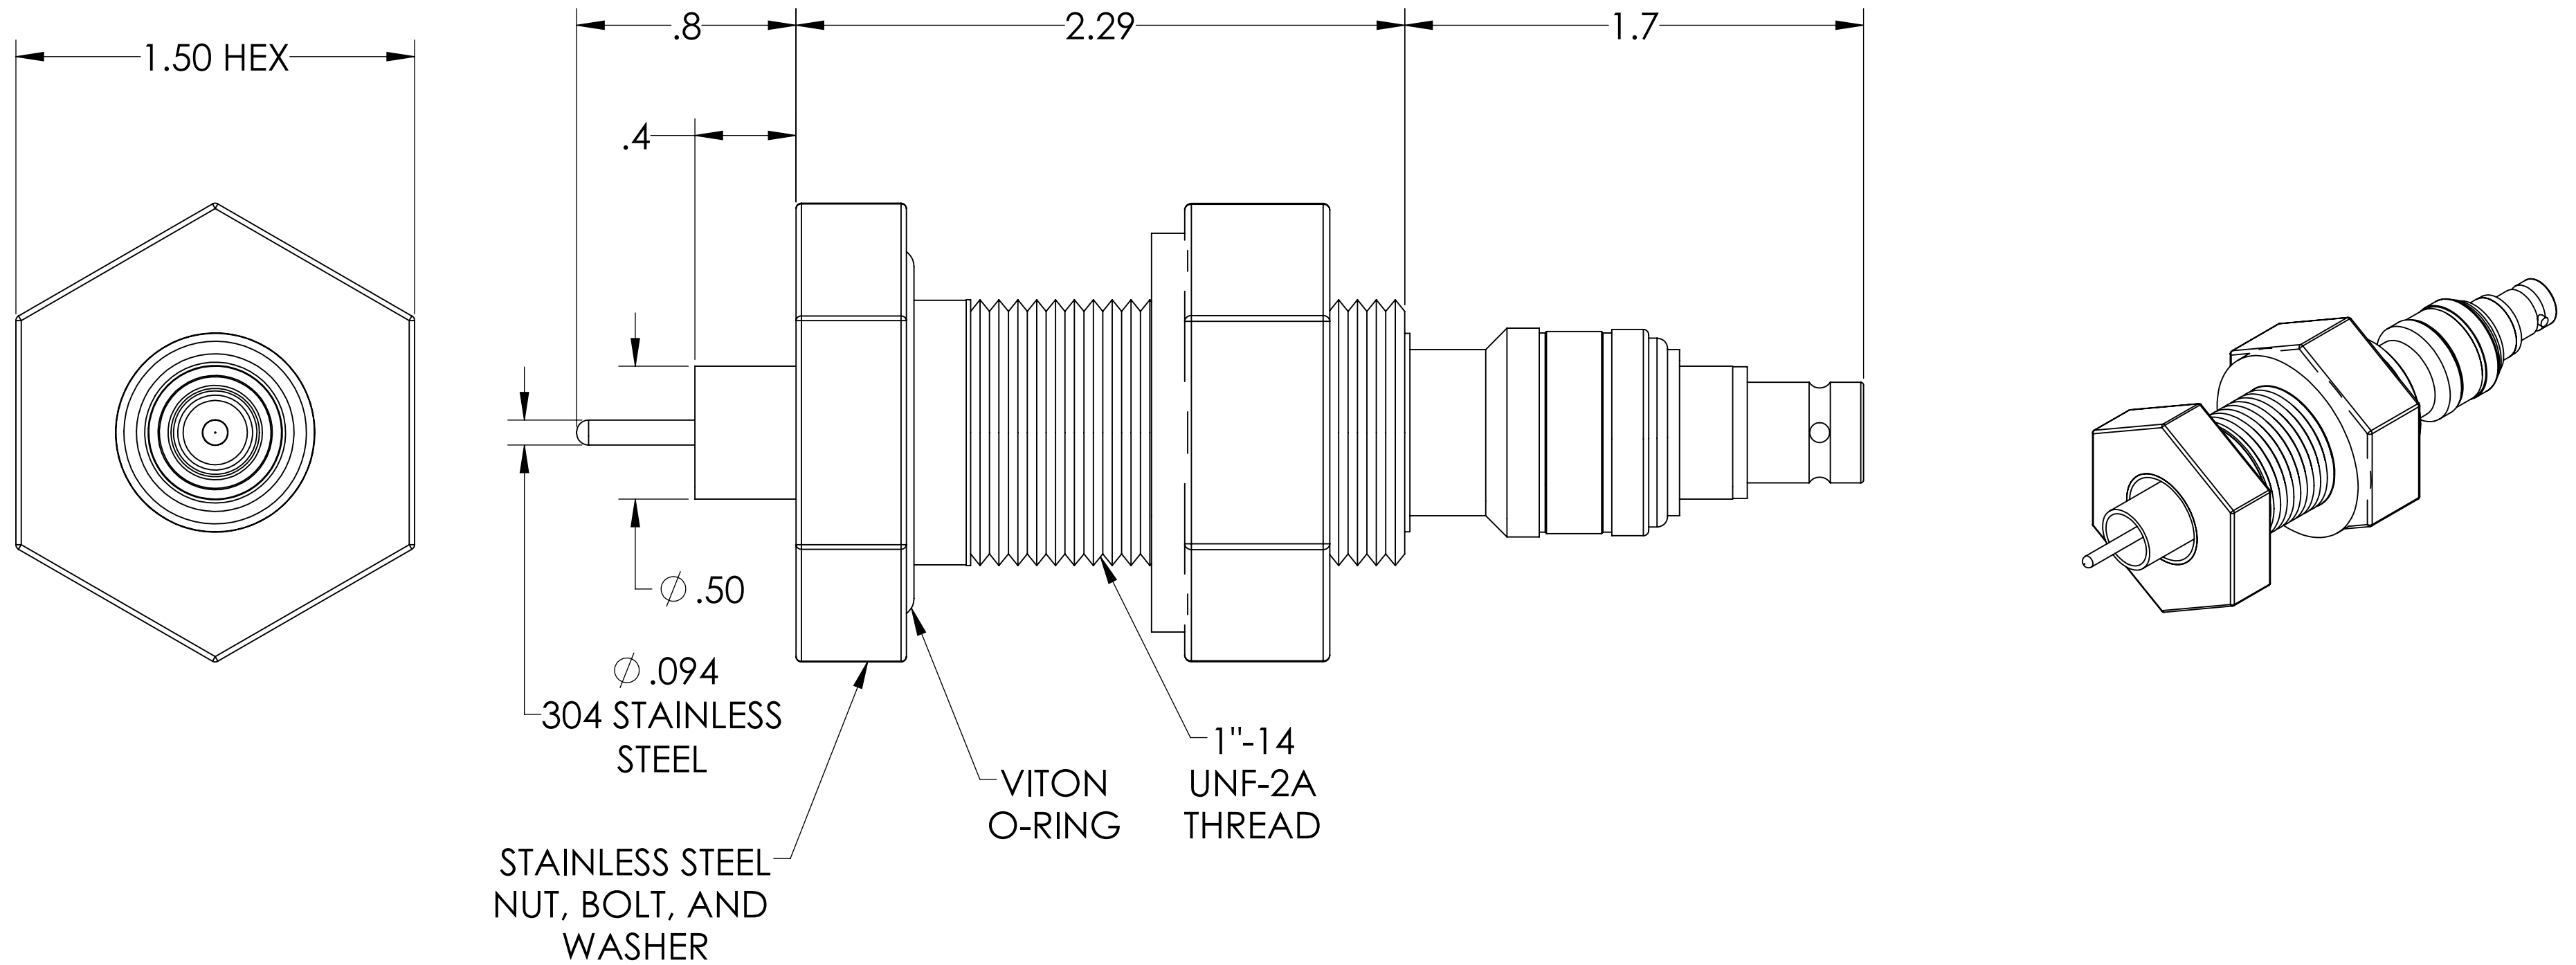

304 STAINLESS STEEL
NUT, BOLT, AND WASHER

VITON O-RING

1"-14 UNF-2A THREAD

PART #	AIRSIDE CONNECTOR INCLUDED
A0485-2-BP	YES
A0485-5-BP	NO

NOTE:

1. SHIELD: FLOATING
2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 5000V PIN TO SHEILD
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

MHV Coaxial Feedthrough, 1 Pin, Floating Shield, 1" Baseplate Bolt, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
MPF PRODUCTS INC.		TITLE:
		MHV COAXIAL FEEDTHROUGH, 1 PIN, FLOATING SHIELD, 1" BASEPLATE BOLT
DOWNLOADED FROM MPFPI.COM		DWG. NO.
		A0485 MHV
		REV
		Friday, January 18, 2019 8:56:52 AM