
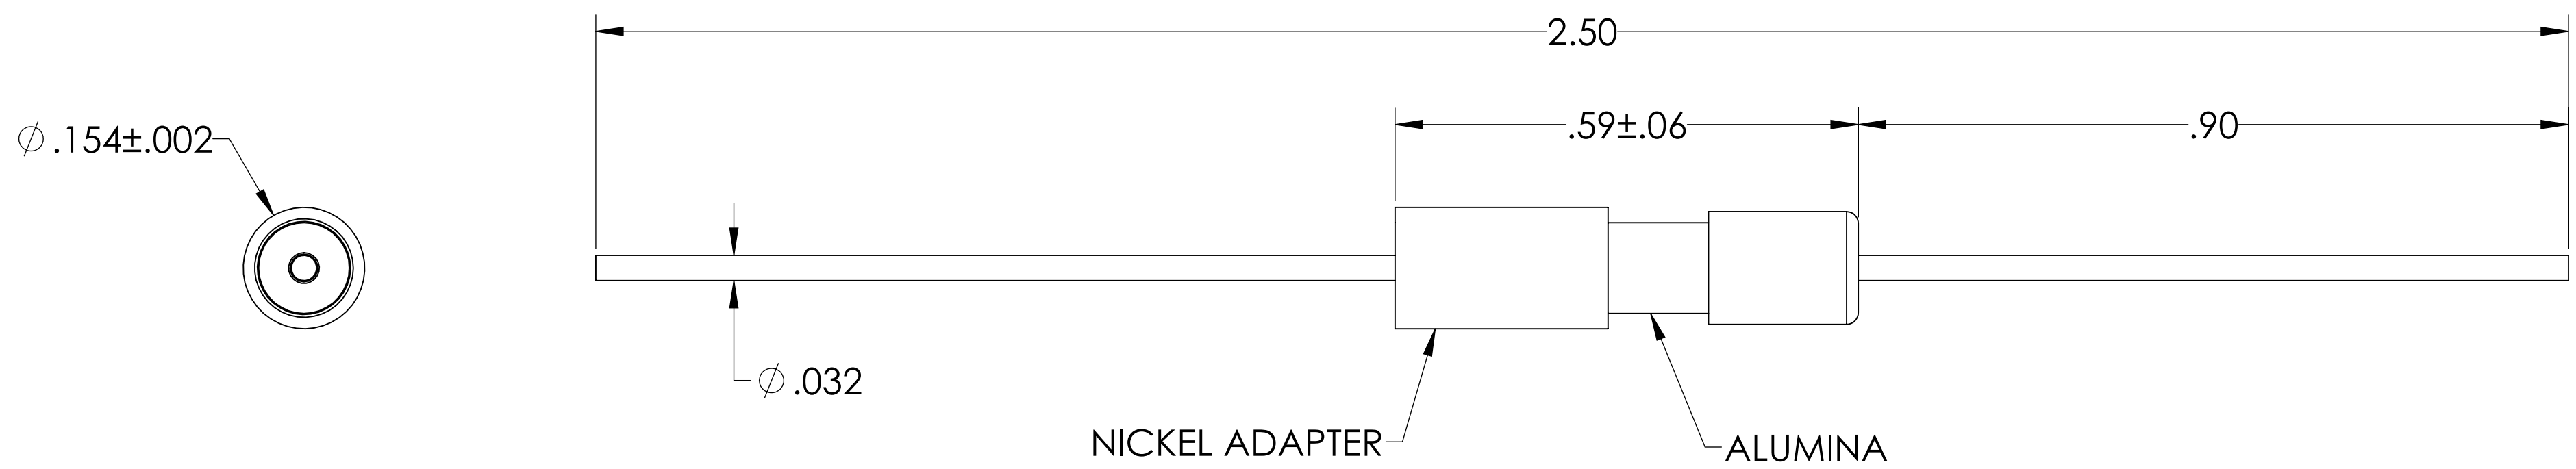


# MPF PRODUCTS INC.

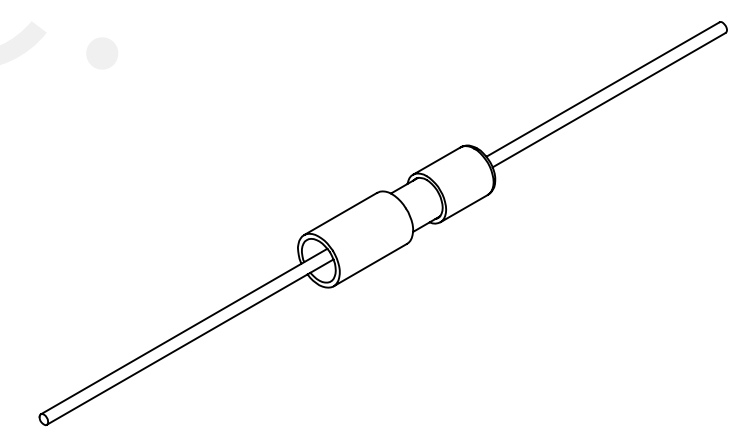

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0495-1-W	MOLYBDENUM	8 AMPS
A0495-2-W	COPPER	15 AMPS
A0495-3-W	NICKEL	5 AMPS
A0495-4-W	STN STL	1 AMP

- NOTE:
1. VOLTAGE: 5000 VOLTS DC
  2. CURRENT: 10 AMPS
  3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 500 Volts, 0.032" Conductors, 0.154" Dia. Nickel Adapter, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	<b>MPF PRODUCTS INC.</b> TITLE: <b>POWER FEEDTHROUGH,                  500 VOLTS, 0.154"                  NICKEL ADAPTER</b>		
ANGULAR: MACH ± 1/2°		DRAWN	WJ			9/11/2015
TWO PLACE DECIMAL ± .030		CHECKED				9/11/2015
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ			9/11/2015
MATERIAL		THIRD ANGLE:		DOWNLOADED FROM MPFPI.COM DWG. NO. <b>A0495</b> REV		
FINISH						
PLATING		APPLICATION: NEXT ASSY    USED ON				
SURFACE FINISH:		63/ OR BETTER		UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
		Friday, January 18, 2019 11:13:41 AM				