
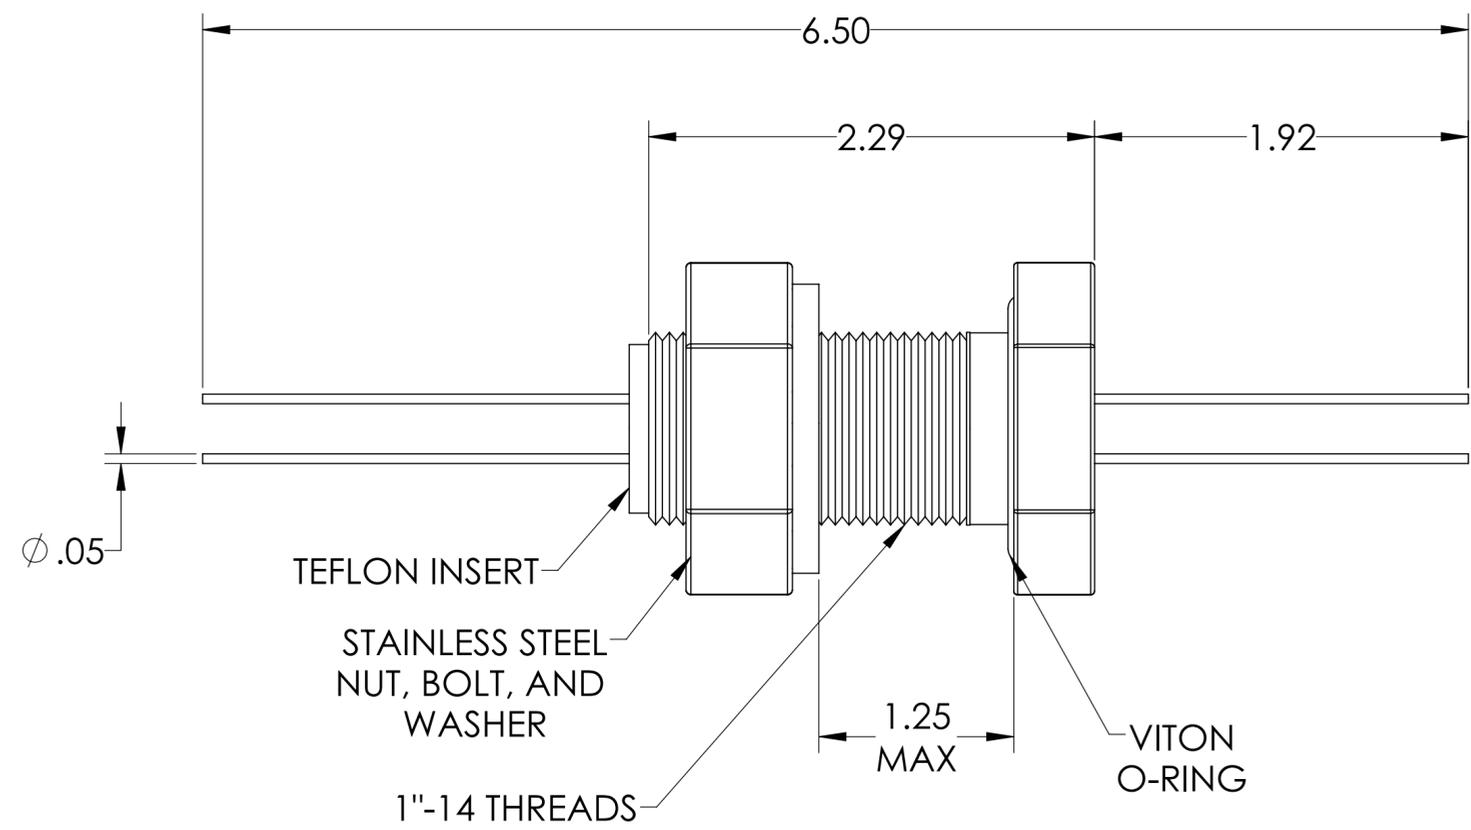
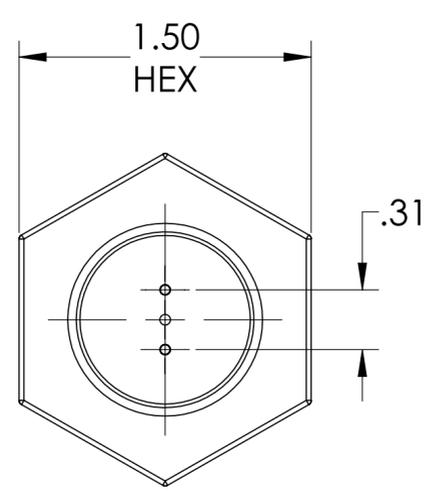


# MPF PRODUCTS INC.

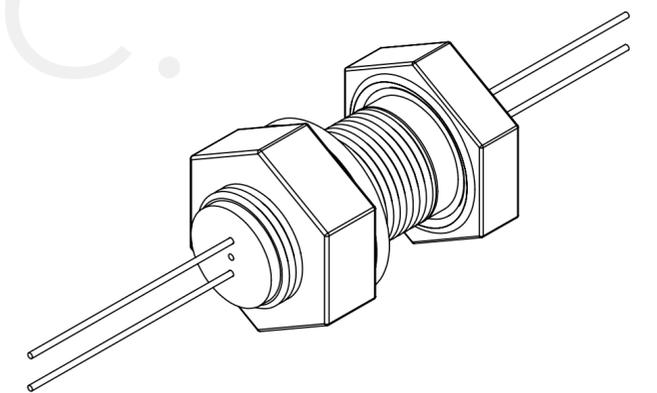

PART #	CONDUCTOR MATERIAL	CURRENT RATING
A0505-1-BP	OFHC COPPER	25 AMPS
A0505-2-BP	NICKEL	8 AMPS
A0505-3-BP	STN STL	1 AMP

- NOTE:
- VOLTAGE: 1000 VOLTS DC
  - CURRENT: SEE TABLE
  - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 1000 Volts, 2 Pins, 0.050" Conductor, 1" Baseplate Bolt, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED	WJ			9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER FEEDTHROUGH, 1000 VOLTS, 2 PINS, 1" BASEPLATE BOLT		
MATERIAL						
FINISH		APPLICATION				
PLATING		NEXT ASSY	USED ON	DOWNLOADED FROM MPFPI.COM		
SURFACE FINISH: 63 OR BETTER		UNLESS OTHERWISE SPECIFIED:		DWG. NO.	REV	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A0505		Tuesday, January 22, 2019 10:44:45 AM		